

# R&S® SMBV100B

## Vector Signal Generator

### Specifications



# CONTENTS

<b>At a glance</b> .....	<b>4</b>
<b>Definitions</b> .....	<b>5</b>
<b>RF characteristics</b> .....	<b>6</b>
Frequency .....	6
Reference frequency .....	6
Level.....	8
Reverse power .....	8
VSWR .....	8
Spectral purity .....	9
Frequency and level sweep .....	11
List mode.....	11
Phase coherence.....	11
<b>Simultaneous modulation</b> .....	<b>12</b>
<b>Analog modulation</b> .....	<b>12</b>
Amplitude modulation (R&S®SMBVB-K720 option).....	12
Frequency bands for frequency and phase modulation.....	13
Frequency modulation (R&S®SMBVB-K720 option).....	13
Phase modulation (R&S®SMBVB-K720 option) .....	13
Pulse modulation (R&S®SMBVB-K22 option).....	14
Input for external modulation signals.....	14
<b>Sources for analog modulation</b> .....	<b>14</b>
Internal modulation generator .....	14
Multifunction generator (R&S®SMBVB-K24 option).....	14
LF frequency sweep .....	15
LF output .....	15
Pulse generator (R&S®SMBVB-K23 option).....	15
Pulse generator output .....	16
<b>I/Q modulation</b> .....	<b>16</b>
I/Q modulation performance .....	16
Analog I/Q inputs .....	17
<b>Baseband characteristics</b> .....	<b>17</b>
Internal baseband characteristics .....	17
Analog I/Q outputs.....	18
Differential analog I/Q outputs (R&S®SMBVB-K17 option) .....	18
Digital baseband input/output (R&S®SMBVB-K19 option) .....	18
I/Q baseband generator – arbitrary waveform mode .....	19
I/Q baseband generator – realtime operation (custom digital modulation) (R&S®SMBVB-K520 option).....	21

<b>Baseband enhancements</b> .....	<b>23</b>
Additive white Gaussian noise (AWGN, R&S®SMBVB-K62 option).....	23
Envelope tracking (R&S®SMBVB-K540 option).....	24
AM/AM, AM/φM predistortion (R&S®SMBVB-K541 option) .....	24
User-defined frequency response correction (R&S®SMBVB-K544 option) .....	24
<b>Digital modulation systems</b> .....	<b>25</b>
Internal digital standards.....	25
Digital standards with R&S®WinIQSIM2™ .....	26
Options with external R&S®Pulse Sequencer software or R&S®Pulse Sequencer (DFS) software .....	26
<b>Signal performance for digital standards and modulation systems</b> .....	<b>27</b>
3GPP FDD (with R&S®SMBVB-K42 option).....	27
EUTRA/LTE (with R&S®SMBVB-K55 option) .....	28
Custom digital modulation (with R&S®SMBVB-K520 option, realtime mode).....	28
<b>Remote control</b> .....	<b>29</b>
<b>Connectors</b> .....	<b>30</b>
Front-panel connectors.....	30
Rear-panel connectors .....	30
<b>General data</b> .....	<b>31</b>
<b>Ordering information</b> .....	<b>32</b>

## At a glance

The state-of-the-art R&S®SMBV100B vector signal generator sets new standards in its class. Ultra high output power, fully calibrated wideband signal generation and intuitive touchscreen operation make the R&S®SMBV100B ideal for all kinds of applications.

The R&S®SMBV100B vector signal generator combines superior performance characteristics such as high output power, wide modulation bandwidth and excellent signal quality. With a frequency range from 8 kHz to 6 GHz, the instrument covers all important RF bands for digital wireless communications. The wide RF modulation bandwidth of up to 500 MHz satisfies the challenging requirements of fourth and fifth generation communications standards. In A & D applications, the wide bandwidth allows the generation of complex pulsed signals.

In many test setups, such as for RF component verification, it is important to provide signals at high power levels. The R&S®SMBV100B offers best-in-class signal quality up to very high power levels. No extra amplifier is needed, which simplifies the test setup.

The R&S®SMBV100B has an intuitive touchscreen GUI and is therefore very ergonomic and practical to use. The customizable instrument is also prepared to meet future requirements. Options can be added via software keycodes, making it easy to enhance the instrument with additional functionality, e.g. by extending frequency, bandwidth and output power.

### Key facts

- Frequency range from 8 kHz to 3 GHz or 6 GHz
- Ultra high output power up to +34 dBm
- 500 MHz modulation bandwidth with perfect accuracy
- Excellent EVM and ACPR results up to high power levels
- Easy upgrading of instrument at customer premises via software keycodes
- Convenient operation via 7" touchscreen

### Perfect for signal quality

- New realtime, user-defined frequency response correction to compensate for the effect of test fixtures
- Very low single-sideband (SSB) phase noise:  
< -134 dBc (meas.) at 1 GHz and 20 kHz offset
- Wide modulation bandwidth with perfect accuracy:  
modulation frequency response of < 0.3 dB (meas.) across 500 MHz bandwidth

### Perfect for output power

- Ultra high output power: up to +34 dBm at 1 GHz
- Excellent level accuracy for CW and modulated signals
- Level linearity of < 0.2 dB (meas.)

### Perfect for use

- Convenient operation via 7" touchscreen
- Automation made easy with context-sensitive help system and SCPI recording
- Internal realtime signal generation
- Protecting user data

### Perfect for upgrading

- Easy upgrading of instrument at customer premises via software keycodes
- Time-limited licenses for software options

### R&S®LegacyPro: refresh your T&M equipment

- Replace your legacy signal generators: emulation of generators from Rohde & Schwarz and other vendors

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

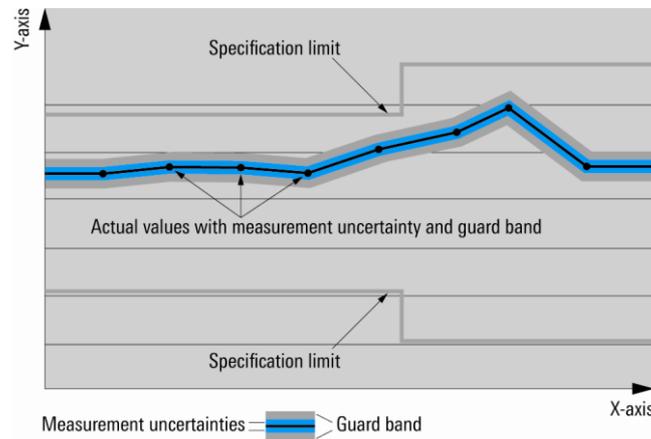

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# RF characteristics

## Frequency

Range	with R&S®SMBVB-B103 option (mandatory)	
	CW mode	8 kHz to 3 GHz
	I/Q mode	1 MHz to 3 GHz
	with R&S®SMBVB-B103 and R&S®SMBVB-KB106 options	
	CW mode	8 kHz to 6 GHz
	I/Q mode	1 MHz to 6 GHz
Resolution of setting		0.001 Hz
Resolution of synthesis	f = 1 GHz	0.163 μHz (nom.)
Settling time	to within $< 1 \times 10^{-7}$ for f > 200 MHz or < 20 Hz for f ≤ 200 MHz with GUI update stopped, I/Q optimization mode: fast	
	after IEC/IEEE bus delimiter, level setting characteristic: auto	< 1.2 ms
Range and resolution of phase offset setting		-36 000° ... + 36 000°, 0.001° resolution

## Reference frequency

Frequency error	at time of calibration in production	
	standard	$< 1 \times 10^{-7}$
	with R&S®SMBVB-B1 or R&S®SMBVB-B1H option	$< 1 \times 10^{-8}$
Aging	after 30 days of uninterrupted operation	
	standard	$\leq 1 \times 10^{-6}/\text{year}$
	with R&S®SMBVB-B1 option	$\leq 1 \times 10^{-9}/\text{day}$ $\leq 1 \times 10^{-7}/\text{year}$
	with R&S®SMBVB-B1H option	$\leq 5 \times 10^{-10}/\text{day}$ $\leq 3 \times 10^{-8}/\text{year}$
Temperature effect	in temperature range from 0 °C to +55 °C	
	standard	$\pm 2 \times 10^{-6}$
	with R&S®SMBVB-B1 option	$\pm 1 \times 10^{-7}$
	with R&S®SMBVB-B1H option	$\pm 1 \times 10^{-8}$
Warm-up time	to nominal thermostat temperature, with R&S®SMBVB-B1 or R&S®SMBVB-B1H option	$\leq 10$ min
Source		internal, external
External reference frequency modes	standard	10 MHz
	R&S®SMBVB-B3 option required	100 MHz
	R&S®SMBVB-B3 option required	1 GHz
	R&S®SMBVB-K704 option required	variable
<b>Reference frequency input</b>		
Connector type	REF IN on rear panel	BNC female
Input frequency	ext. reference frequency mode: 10 MHz	10 MHz
	ext. reference frequency mode: 100 MHz	100 MHz
	ext. reference frequency mode: variable	1 MHz to 100 MHz
Input frequency setting resolution	ext. reference frequency mode: variable	0.1 Hz
Minimum frequency locking range	ext. reference frequency modes: 10 MHz, 100 MHz	
	ext. reference frequency mode: variable	
	without R&S®SMBVB-B1/-B1H option	$\pm 6 \times 10^{-6}$
	with R&S®SMBVB-B1/-B1H option	$\pm 0.3 \times 10^{-6}$
Input level range		0 dBm to +16 dBm
Input impedance		50 Ω (nom.)

Reference frequency output		
Connector type	REF OUT on rear panel	BNC female
Output frequency	sine wave	
	source mode: internal	10 MHz
	source mode: external	
	ext. reference frequency modes: 10 MHz, 1 GHz	10 MHz
	ext. reference frequency mode: 100 MHz	100 MHz
	ext. reference frequency mode: variable	10 MHz, applied external reference frequency <sup>1</sup>
Output level		+7 dBm to +13 dBm, +10 dBm (typ.)
Source impedance		50 Ω (nom.)
1 GHz reference frequency input (R&S®SMBVB-B3 option)		
Connector type	REF 1G IN on rear panel	SMA female
Input frequency		1 GHz
Minimum frequency locking range		$\pm 100 \times 10^{-6}$
Input level range		0 dBm to +16 dBm
Input impedance		50 Ω (nom.)
1 GHz reference frequency output (R&S®SMBVB-B3 option)		
Connector type	REF 1G OUT on rear panel	SMA female
Output frequency	sine wave	1 GHz
Output level		0 dBm to +13 dBm, +10 dBm (typ.)
Source impedance		50 Ω (nom.)

#### Reference frequency option concept

		without option	with R&S®SMBVB-K704 option 'flexible reference input'	with R&S®SMBVB-B3 option '100 MHz/1 GHz reference'
INPUT	10 MHz input frequency	•	•	•
	100 MHz input frequency	–	–	•
	1 MHz – 100 MHz input frequency	–	•	–
	1 GHz input frequency	–	–	•
OUTPUT	10 MHz output frequency <sup>2</sup>	•	•	•
	'Loop through' of input to output <sup>3</sup>	•	•	•
	1 GHz output frequency	–	–	•

#### Option R&S®SMBVB-K704 (flexible reference input from 1 MHz to 100 MHz)

When this option is installed, the user can set the variable reference input frequency in 0.1 Hz steps between 1.0 and 100 MHz. The signal generator will lock its internal 10 MHz reference oscillator on the input frequency.

#### Option R&S®SMBVB-B3 (100 MHz, 1 GHz ultra low noise reference input/output)

When this option is installed, the user can apply a 1 GHz reference signal to the dedicated SMA connector. The signal generator will lock its internal 500 MHz reference oscillator on the 1 GHz reference. This option should be used if a very high phase stability between multiple generators is required.

Also, the '100 MHz' input frequency mode is only available with this option. The signal generator will lock its internal 500 MHz reference oscillator on the 100 MHz reference.

<sup>1</sup> Works only within the input frequency ranges from 5 MHz to 13 MHz and from 95 MHz to 100 MHz.

<sup>2</sup> Not available with all external input reference frequencies.

<sup>3</sup> Not available with all external input reference frequencies.

## Level


Setting range			
R&S®SMBVB-B103/-KB106	standard		
	8 kHz ≤ f < 100 kHz	-145 dBm to +8 dBm	
	100 kHz ≤ f < 300 kHz	-145 dBm to +13 dBm	
	300 kHz ≤ f < 1 MHz	-145 dBm to +18 dBm	
	1 MHz ≤ f < 6 GHz	-145 dBm to +20 dBm	
	with R&S®SMBVB-K31 option		
	8 kHz ≤ f < 100 kHz	-145 dBm to +8 dBm	
	100 kHz ≤ f < 300 kHz	-145 dBm to +13 dBm	
	300 kHz ≤ f < 1 MHz	-145 dBm to +18 dBm	
	1 MHz ≤ f ≤ 6 GHz	-145 dBm to +30 dBm	
	with R&S®SMBVB-B32 option		
	8 kHz ≤ f < 100 kHz	-145 dBm to +23 dBm	
	100 kHz ≤ f < 300 kHz	-145 dBm to +27 dBm	
	300 kHz ≤ f < 1 MHz	-145 dBm to +31 dBm	
1 MHz ≤ f ≤ 6 GHz	-145 dBm to +36 dBm		
Setting resolution		0.01 dB	
Specified level range	peak envelope power (PEP)		
R&S®SMBVB-B103/-KB106	standard		
	200 kHz < f ≤ 1 MHz	-110 dBm to +13 dBm	
	1 MHz < f ≤ 10 MHz	-110 dBm to +18 dBm	
	10 MHz < f ≤ 6 GHz	-127 dBm to +18 dBm	
	with R&S®SMBVB-K31 option		
	200 kHz < f ≤ 1 MHz	-110 dBm to +13 dBm	
	1 MHz < f ≤ 10 MHz	-110 dBm to +21 dBm	
	10 MHz < f ≤ 4 GHz	-127 dBm to +21 dBm	
	4 GHz < f ≤ 6 GHz	-127 dBm to +20 dBm	
	with R&S®SMBVB-B32 option		
	200 kHz < f ≤ 10 MHz	-127 dBm to +21 dBm	
	10 MHz < f ≤ 6 GHz	-127 dBm to +25 dBm	
	Level accuracy	level setting characteristic: auto, temperature range from +18°C to +33°C	
		level > -90 dBm	
200 kHz < f ≤ 3 GHz		< 0.5 dB	
f > 3 GHz		< 0.7 dB	
level ≤ -90 dBm			
200 kHz < f ≤ 10 MHz		< 1.2 dB, < 1.0 dB (typ.)	
10 MHz < f ≤ 3 GHz		< 0.8 dB	
f > 3 GHz		< 1.1 dB	
Additional level error	I/Q modulation	< 0.3 dB	
	pulse modulation	< 0.5 dB	
	ALC state: off (table)	< 0.5 dB	
Settling time	to < 0.1 dB deviation from final value, with GUI update stopped, temperature range from +18°C to +33°C, f > 10 MHz, level setting characteristic: auto, I/Q optimization mode: fast		
	after IEC/IEEE bus delimiter	< 1 ms, (0.7 ms meas.)	
Interruption-free level range	level setting characteristic:	> 20 dB	
	uninterrupted level setting		

## Reverse power

Reverse power	Maximum permissible RF power in output frequency range of RF path, from 50 Ω source. In case of too high reverse power, the RF output is switched off.	
	1 MHz < f ≤ 1 GHz	50 W
	1 GHz < f ≤ 2 GHz	25 W
	2 GHz < f ≤ 6 GHz	10 W
Maximum permissible DC voltage	50 V (nom.)	

## VSWR

Output impedance VSWR in 50 Ω system	level setting characteristic: auto, f > 200 kHz	< 1.8
--------------------------------------	-------------------------------------------------	-------

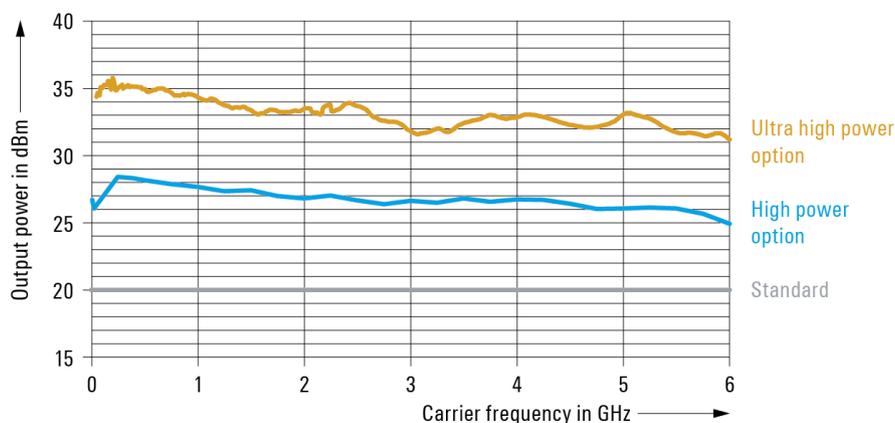


Measured output power for the base unit, with the high power option (R&S®SMBVB-K31) and with the additional ultra high power option (R&S®SMBVB-B32).

## Spectral purity

Harmonics	CW, I/Q mode (full-scale DC input), level $\leq 13$ dBm	
	1 MHz < f $\leq$ 6 GHz	< -30 dBc <sup>4</sup>
Nonharmonics	CW, I/Q mode (full-scale DC input), level > +10 dBm, > 10 kHz offset from carrier and outside the modulation spectrum, reference frequency internal	
	f $\leq$ 750 MHz	< -80 dBc
	750 MHz < f $\leq$ 1500 MHz	< -76 dBc
	1500 MHz < f $\leq$ 3 GHz	< -70 dBc
	3 GHz < f $\leq$ 6 GHz	< -64 dBc
Subharmonics	CW, I/Q mode (full-scale DC input), level > +10 dBm	
	f $\leq$ 3.00 GHz	< non harmonic specification
	3 GHz < f $\leq$ 6 GHz	< -75 dBc (< -90 dBc measured)
Wideband noise	carrier offset = 30 MHz, measurement bandwidth 1 Hz, level setting characteristic: auto	
	CW, level = +10 dBm	
	15 MHz $\leq$ f $\leq$ 6 GHz	< -146 dBc, -153 dBc (typ.)
	I/Q modulation with full-scale internal single carrier signal, level = +10 dBm, I/Q input gain (GUI setting) = +4 dB	
	20 MHz $\leq$ f $\leq$ 80 MHz	< -139 dBc, -142 dBc (typ.)
	80 MHz < f $\leq$ 200 MHz	< -135 dBc, -138 dBc (typ.)
	200 MHz < f $\leq$ 1 GHz	< -141 dBc, -144 dBc (typ.)
	1 GHz < f $\leq$ 3 GHz	< -142 dBc, -145 dBc (typ.)
3 GHz < f $\leq$ 6 GHz	< -140 dBc, -143 dBc (typ.)	
SSB phase noise	carrier offset = 20 kHz, measurement bandwidth 1 Hz, level = +10 dBm	
	f = 100 MHz	
	CW mode	< -142 dBc, -146 dBc (typ.)
	I/Q mode	< -121 dBc, -127 dBc (typ.)
	f = 1 GHz	< -126 dBc, -132 dBc (typ.)
	f = 2 GHz	< -120 dBc, -126 dBc (typ.)
	f = 3 GHz	< -116 dBc, -122 dBc (typ.)
	f = 4 GHz	< -114 dBc, -120 dBc (typ.)
	f = 6 GHz	< -110 dBc, -116 dBc (typ.)

<sup>4</sup> Not valid in I/Q wideband mode.

RMS jitter	standard, CW	
	f = 155 MHz, bandwidth = 100 Hz to 1.5 MHz	63 fs (meas.)
	f = 622 MHz, bandwidth = 1 kHz to 5 MHz	37 fs (meas.)
	f = 1 GHz, bandwidth = 1 Hz to 10 MHz	2.5 ps (meas.)
	f = 2.488 GHz, bandwidth = 5 kHz to 20 MHz	33 fs (meas.)
	with R&S®SMBVB-B1 option, CW	
	f = 155 MHz, bandwidth = 100 Hz to 1.5 MHz	57 ps (meas.)
	f = 622 MHz, bandwidth = 1 kHz to 5 MHz	37 ps (meas.)
	f = 1 GHz, bandwidth = 1 Hz to 10 MHz	890 fs (meas.)
	f = 2.488 GHz, bandwidth = 5 kHz to 20 MHz	33 fs (meas.)
	with R&S®SMBVB-B1H option, CW	
	f = 155 MHz, bandwidth = 100 Hz to 1.5 MHz	39 fs (meas.)
	f = 622 MHz, bandwidth = 1 kHz to 5 MHz	37 fs (meas.)
f = 1 GHz, bandwidth = 1 Hz to 10 MHz	83 fs (meas.)	
f = 2.488 GHz, bandwidth = 5 kHz to 20 MHz	33 fs (meas.)	
Residual FM	CW, RMS values at f = 1 GHz	
	300 Hz to 3 kHz, weighted (ITU-T)	< 2 Hz, 0.22 Hz (typ.)
	20 Hz to 23 kHz	< 4 Hz, 1.35 Hz (typ.)
Residual AM	CW, f > 10 MHz, RMS value (20 Hz to 20 kHz), level = 12 dBm	< 0.02 %

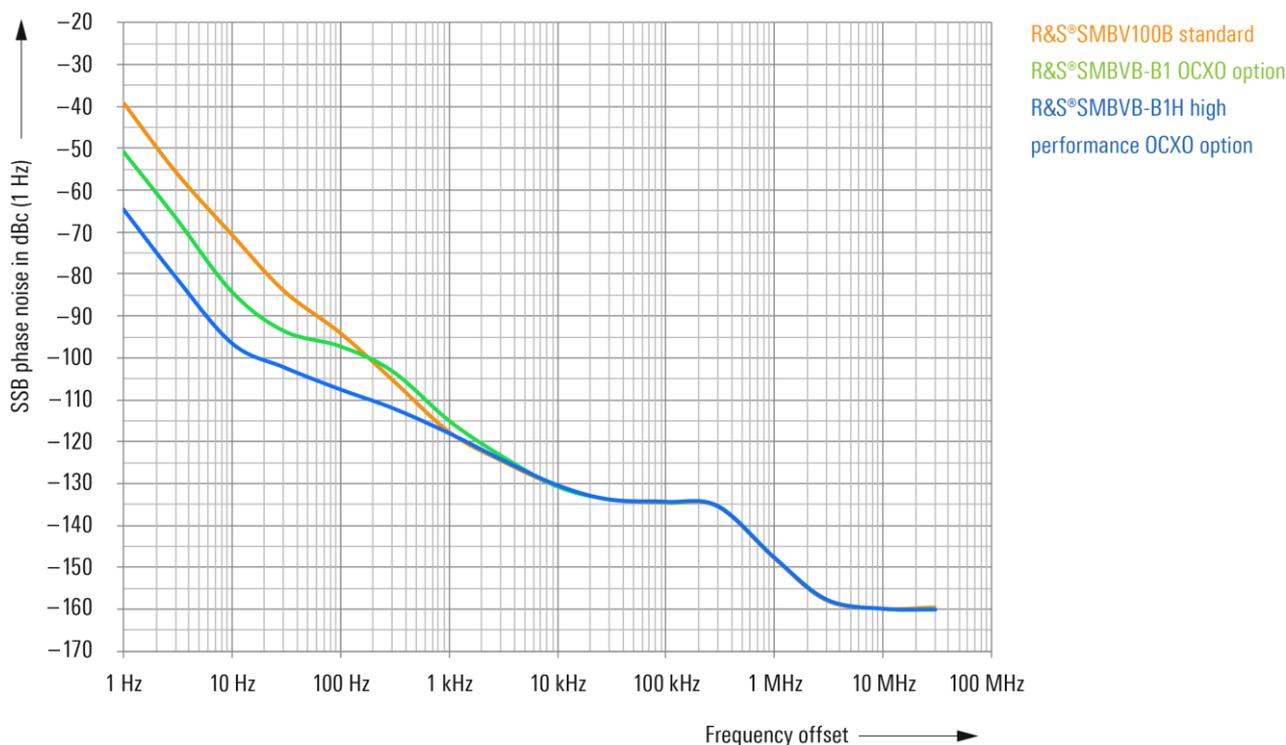

SSB phase noise comparison with standard internal reference, R&S®SMBVB-B1, R&S®SMBVB-B1H (meas.).

## Frequency and level sweep

Operating mode		digital sweep in discrete steps
Sweep parameters		RF frequency, RF level
Trigger modes	execute sweep continuously with internal trigger source	auto
	execute one full sweep	single, extern single
	execute one step	step, extern step
	sweep start and stop controlled by external trigger signal	extern start/stop
Trigger source		external trigger signal (INST TRIG at rear), rotary knob, touch panel, remote control
Sweep range		fully specified frequency and level range
	interruption-free level sweep with level setting characteristic: uninterrupted level setting	0.01 dB to 20 dB
Sweep shape		sawtooth, triangle
Step size setting resolution	frequency sweep linear	0.001 Hz
	frequency sweep logarithmic	0.01 %
	level sweep	0.01 dB
Dwell time setting range		5 ms to 100 s
Dwell time setting resolution		0.1 ms

## List mode

Frequency and level values can be stored in a list and triggered by an internal timer or an external trigger.

Run mode		live
Operating modes	internal trigger	auto
	internal trigger, one sweep per trigger event	single
	internal trigger, one step per trigger event	step
	external trigger, one sweep per trigger event	extern single
	external trigger, one step per trigger event	extern step
Max. number of steps (learned mode)		10000
Dwell time setting range	can be set individually for each step	1 ms to 100 s
Dwell time setting resolution		0.1 ms
Setting time	run mode: learned, after external trigger	see frequency and level data

## Phase coherence

The R&S®SMBVB-K90 option enables phase-coherent RF outputs of two or more instruments in I/Q mode.

Frequency range	limited to the common frequency range of all coupled RF paths	
	R&S®SMBVB-B103	80 MHz < f ≤ 3 GHz
	R&S®SMBVB-KB106	80 MHz < f ≤ 6 GHz
LO coupling modes	This mode corresponds to internal LO operation. The LO OUT connector can provide the internal LO oscillator signal to enable phase-coherent coupling with other instruments.	internal
	This mode corresponds to external LO operation, provided at the LO IN connector. The LO OUT connector can provide the external LO oscillator signal to enable phase-coherent coupling with additional instruments.	external
LO OUT states	The active local oscillator signal can be routed to the LO OUT connector (in order to couple two or more instruments).	on/off
Input of phase coherence signal		
Connector type	LO IN on rear panel	SMA female
Input impedance		50 Ω (nom.)
Input level range of external LO signal		+7 dBm to +13 dBm

Frequency of external LO signal	R&S®SMBVB-B103, for RF setting 80 MHz < f ≤ 3 GHz	1.0 × f
	R&S®SMBVB-KB106, for RF setting 80 MHz < f ≤ 6 GHz	1.0 × f
Output of phase coherence signal		
Connector type	LO OUT on rear panel	SMA female
Output impedance		50 Ω (nom.)
Output level range		+7 dBm to +13 dBm
Frequency of internal LO signal	R&S®SMBVB-B103, for RF setting 80 MHz < f ≤ 3 GHz	1.0 × f
	R&S®SMBVB-KB106, for RF setting 80 MHz < f ≤ 6 GHz	1.0 × f

## Simultaneous modulation

	Amplitude modulation	Frequency modulation	Phase modulation	Pulse modulation	I/Q modulation
Amplitude modulation		●	●	○	–
Frequency modulation	●		–	●	○
Phase modulation	●	–		●	○
Pulse modulation	○	●	●		○
I/Q modulation	–	○	○	○	

● = compatible, – = incompatible

○ = compatible with limitations: No specification applies to level accuracy, AM distortion, AM depth error and on/off ratio with pulse modulation.

## Analog modulation

### Amplitude modulation (R&S®SMBVB-K720 option)

Specifications apply for f > 200 kHz, level setting characteristics: auto, level (PEP) = 0 dBm.

Modulation source		internal, external, internal + external
External coupling		AC, DC
AM depth		
Setting range	at high levels, modulation is clipped when the maximum PEP is reached.	0 % to 100 %
Setting resolution		0.1 %
AM depth (m) error	$f_{\text{mod}} = 1 \text{ kHz}$ and $m < 80 \%$	
	$f \leq 80 \text{ MHz}$	< (1 % of reading + 1 %)
	$f > 80 \text{ MHz}$	< (3 % of reading + 1 %)
AM distortion	$f_{\text{mod}} = 1 \text{ kHz}$	
	$f \leq 80 \text{ MHz}$	
	$m = 30 \%$	< 0.25 %
	$m = 80 \%$	< 0.5 %
	$f > 80 \text{ MHz}$	
	$m = 30 \%$	< 1.5 %
Modulation frequency response	$m = 80 \%$	< 3 %
	$m = 60 \%$ , DC coupling: 0 Hz to 50 kHz, AC coupling: 10 Hz to 50 kHz	< 3 dB
Incidental $\phi\text{M}$ at AM	$m = 30 \%$ , $f_{\text{mod}} = 1 \text{ kHz}$ , $\pm \text{peak}/2$	< 0.2 rad

## Frequency bands for frequency and phase modulation

Multiplier N is used to define FM and  $\phi$ M specifications within this document.

Multiplier N for different frequency ranges	FM mode: low noise	
	$\phi$ M mode: low noise	
	$f \leq 80$ MHz	1
	80 MHz < $f \leq 93.75$ MHz	1/16
	93.75 MHz < $f \leq 187.5$ MHz	1/8
	187.5 MHz < $f \leq 375$ MHz	1/4
	375 MHz < $f \leq 750$ MHz	1/2
	750 MHz < $f \leq 1500$ MHz	1
	1500 MHz < $f \leq 3$ GHz	2
	3 GHz < $f \leq 6$ GHz	4
	FM mode: high bandwidth	
	$\phi$ M mode: high bandwidth, high deviation	
	$f \leq 250$ MHz (mixer mode)	1
	250 MHz < $f \leq 375$ MHz	1/4
	375 MHz < $f \leq 750$ MHz	1/2
	750 MHz < $f \leq 1.5$ GHz	1
	1.5 MHz < $f \leq 3$ GHz	2
	3 GHz < $f \leq 6$ GHz	4

## Frequency modulation (R&S®SMBVB-K720 option)

Modulation source		internal, external, internal + external
External coupling		AC, DC
FM modes		low noise, high bandwidth
Maximum deviation	FM mode: high bandwidth	$N \times 10$ MHz
	FM mode: low noise	$N \times 1$ MHz
Resolution of setting		< 0.02 % of set deviation or $N \times 0.1$ Hz, whichever is greater, min. 0.01 Hz
FM deviation error	$f_{\text{mod}} = 2$ kHz, deviation $\leq N \times 1$ MHz	
	modulation source: internal	< (2 % of setting + 20 Hz)
	modulation source: external	< (3 % of setting + 20 Hz)
FM distortion	$f_{\text{mod}} = 2$ kHz, deviation = $N \times 1$ MHz	< 0.2 %
Modulation frequency response	FM mode: high bandwidth, coupling: DC/AC, input impedance: 50 $\Omega$	
	DC coupling: 0 Hz to 7 MHz, AC coupling: 10 Hz to 7 MHz	< 3 dB
	FM mode: low noise, coupling: DC/AC, input impedance: 50 $\Omega$	
	DC coupling: 0 Hz to 100 kHz, AC coupling: 10 Hz to 100 kHz	< 3 dB
Synchronous AM with FM	40 kHz deviation, $f_{\text{mod}} = 1$ kHz, $f > 10$ MHz	< 0.2 %
Carrier frequency offset with FM DC	after FM offset adjustment, FM source external, input impedance 50 $\Omega$	< 0.2 % of set deviation

## Phase modulation (R&S®SMBVB-K720 option)

Specifications only valid for main PLL bandwidth normal.

Modulation source		internal, external, internal + external
External coupling		AC, DC
$\phi$ M modes		high deviation, high bandwidth, low noise
Maximum deviation	$\phi$ M mode: high bandwidth	$N \times 1$ rad
	$\phi$ M mode: high deviation	$N \times 40$ rad
	$\phi$ M mode: low noise	$N \times 10$ rad
Resolution of setting	$\phi$ M modes: high deviation, low noise	< 0.02 % of set deviation or $N \times 20$ $\mu$ rad, whichever is greater, min. 1 $\mu$ rad
	$\phi$ M mode: high bandwidth	< 0.1 % of set deviation, min. $N \times 20$ $\mu$ rad
$\phi$ M deviation error	$f_{\text{mod}} = 1$ kHz, deviation $\leq$ half of max. deviation	
	modulation source: internal	< (2 % of setting + 0.003 rad)
	modulation source: external	< (3 % of setting + 0.003 rad)
$\phi$ M distortion	$f_{\text{mod}} = 10$ kHz, half of max. deviation	< 0.2 %

Modulation frequency response	$\phi$ M mode: high bandwidth, coupling: DC/AC, input impedance: 50 $\Omega$	
	DC coupling: 0 Hz to 7 MHz, AC coupling: 10 Hz to 7 MHz	< 3 dB
	$\phi$ M mode: high deviation, coupling: DC/AC, input impedance: 50 $\Omega$	
	DC coupling: 0 Hz to 250 kHz AC coupling: 10 Hz to 250 kHz	< 1 dB
	$\phi$ M mode: low noise, coupling: DC/AC, input impedance: 50 $\Omega$	
	DC coupling: 0 Hz to 100 kHz AC coupling: 10 Hz to 100 kHz	< 3 dB

## Pulse modulation (R&S®SMBVB-K22 option)

Modulation source		external
	with R&S®SMBVB-K23 option	external, internal
On/off ratio		>80 dB
Rise/fall time	10 % to 90 % of RF amplitude, f > 80 MHz	
	transition type: fast	< 15 ns, < 5 ns (meas.)
	transition type: smoothed	< 200 ns
Minimum pulse width	50 %/50 % of RF amplitude, transition type: fast	< 20 ns
Pulse repetition frequency		0 Hz to 25 MHz
Video feedthrough	level < 10 dBm	< 10 % of RF, < 200 mV (peak-to-peak value)
Pulse overshoot		< 10 %
Pulse delay	pulse external trigger to RF transition type: fast	90 ns (nom.)

## Input for external modulation signals

<b>Modulation input EXT for AM/FM/<math>\phi</math>M</b>		
Connector type	MOD EXT on rear panel	BNC female
Input impedance	selectable	>100 k $\Omega$ , 600 $\Omega$ , 50 $\Omega$ (nom.)
Input sensitivity	peak value for set modulation factor or deviation	1 V (nom.)
Input damage voltage		$\pm$ 7 V
<b>Pulse modulation input PULSE EXT</b>		
Connector type	PULSE EXT on rear panel	BNC female
Input impedance	selectable	10 k $\Omega$ , 50 $\Omega$ (nom.)
Input voltage	TTL, CMOS compatible, threshold low	0.8 V (nom.)
	TTL, CMOS compatible, threshold high	1.3 V (nom.)
Input damage voltage		$\pm$ 6 V
Input polarity	selectable	normal, inverse

## Sources for analog modulation

### Internal modulation generator

Signal types		sine
Frequency setting range		0.1 Hz to 1 MHz
Frequency setting resolution		0.01 Hz
Frequency error		< (0.001 Hz + relative deviation of reference frequency $\times$ modulation frequency)

### Multifunction generator (R&S®SMBVB-K24 option)

Signal types	LF generator 1	sine, pulse, triangle, trapezoid
	LF generator 2	sine, pulse, triangle, trapezoid
	noise generator (noise amplitude distribution)	Gaussian, equal
Frequency setting range	sine	0.1 Hz to 10 MHz
	pulse, triangle, trapezoid	0.1 Hz to 1 MHz (displayed value)
	noise bandwidth	100 kHz to 10 MHz

Resolution of setting	sine	0.01 Hz
	pulse, triangle, trapezoid	10 ns
	noise bandwidth	100 kHz
Frequency error		< (0.001 Hz + relative deviation of reference frequency × modulation frequency)

## LF frequency sweep

Operating mode		digital sweep in discrete steps
Trigger modes	execute sweep continuously with internal trigger source	auto
	execute one full sweep	single
	execute one step	step
	sweep start and stop controlled by external trigger signal	start/stop
Trigger source		external trigger signal (INST TRIG at rear), rotary knob, touch panel, remote control
Sweep range		fully specified frequency range
Sweep shape		triangle, sawtooth
Step size	linear	full frequency range
	logarithmic	0.01 % to 100 % per step
Dwell time setting range		5 ms to 100 s
Dwell time setting resolution		0.1 ms

## LF output

Monitoring of resulting modulation signal for		AM, FM, $\phi$ M
Source		LF generator 1, LF generator 2, noise generator, external
Output voltage	$V_p$ at LF connector, open circuit voltage EMF	
Setting range		0 mV to 4 V
Setting resolution		1 mV
Setting error	$f = 1 \text{ kHz}, R_L > 50 \text{ k}\Omega$	< (1 % of reading + 1 mV)
Output impedance		50 $\Omega$ or 600 $\Omega$ (nom.)
DC offset		-4.0 V to +4.0 V
Damage voltage		$\pm 7\text{V}$
Frequency response	up to 1 MHz	< 0.5 dB
	up to 10 MHz	< 1.5 dB
Distortion	$f < 100 \text{ kHz}$ , at $R_L > 50 \text{ }\Omega$ , level ( $V_{EMF}$ ) < 1 V	< 0.1 %

## Pulse generator (R&S®SMBVB-K23 option)

Pulse modes		single pulse, double pulse
Trigger modes	free run, internally triggered	auto
		external trigger
		external gate
Pulse period		
Setting range		40 ns to 100 s
Setting resolution		10 ns
Pulse width	pulse widths of double pulses can be set independently	
Setting range		10 ns to 1 s
Setting resolution		10 ns
Pulse delay		
Setting range		0 ns to 100 s
Setting resolution		10 ns
Double-pulse delay		
Setting range		20 ns to 1 s
Setting resolution		10 ns
External trigger		
Delay	trigger to video output	70 ns (meas.)
Jitter		< 10 ns (nom.)

## Pulse generator output


PULSE VIDEO output	output of pulse generator signal	
Connector type	PULSE VIDEO output on rear panel	BNC female
Output level	without load	digital signal 0 V/3.3 V (nom.)

## I/Q modulation

### I/Q modulation performance

Operating modes		external wideband I/Q, internal baseband I/Q
RF modulation bandwidth	with external wideband I/Q inputs, I/Q wideband: on	
	1 MHz $\leq$ f $\leq$ 4 GHz	$\pm 25$ % of carrier frequency
	f > 4GHz	$\pm 1$ GHz
	with external wideband I/Q inputs, I/Q wideband off	
	f $\leq$ 2500 MHz	$\pm 10$ % of carrier frequency
	f > 2500 MHz	$\pm 250$ MHz
	with internal baseband I/Q, I/Q wideband on	
1 MHz < f $\leq$ 1000 MHz	$\pm 25$ % of carrier frequency	
f > 1000 MHz	$\pm 250$ MHz	
RF frequency response in specified RF modulation bandwidth	with external wideband I/Q inputs	
	I/Q wideband on	< 9 dB, < 7 dB (meas.)
	I/Q wideband off	< 5 dB, < 3 dB (meas.)
	with internal baseband I/Q	
I/Q wideband on, optimization mode: high quality	< 1.0 dB, < 0.3 dB (meas.)	
Carrier leakage <sup>5</sup>	mode: internal baseband I/Q, referenced to full-scale input	< -55 dBc
Suppression of image sideband for entire instrument in modulation bandwidth	mode: internal baseband I/Q, up to 500 MHz RF modulation bandwidth	> 50 dB, 60 dB (typ.)
I/Q impairments (analog)	These impairments are set within the analog I/Q modulator section. They can be used in external wideband I/Q mode and internal baseband I/Q mode. They cannot be applied to the analog or digital I/Q outputs.	
I offset, Q offset		
Setting range		-10 % to +10 %
Resolution		0.01 %
Gain imbalance		
Setting range		-1.0 dB to +1.0 dB
Resolution		0.01 dB
Quadrature offset		
Setting range		-10° to +10°
Resolution		0.01°

<sup>5</sup> Value applies after 1 hour warm-up time and recalibration for 4 hours of operation and temperature variations of less than +5 °C.

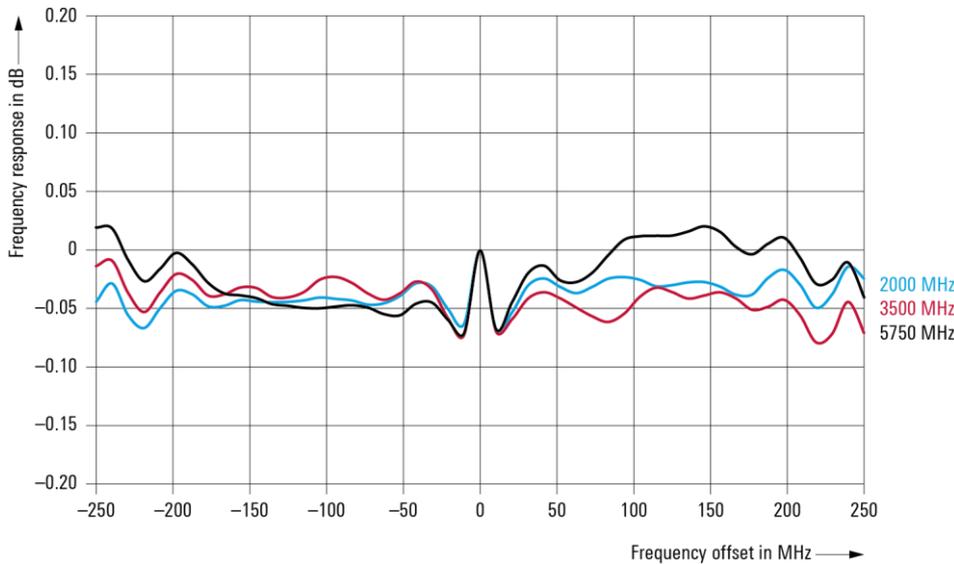

Measured RF frequency response with internal baseband I/Q at different carrier frequencies

## Analog I/Q inputs

Analog I/Q input signals are directly applied to the analog I/Q modulation circuit and are not routed through the baseband section of the R&S®SMBV100B.

Input mode		single-ended
Connector types	I, Q on rear panel	BNC female
Input impedance		50 Ω (nom.)
VSWR	up to 200 MHz	< 1.2
	200 MHz to 500 MHz	< 1.35
	500 MHz to 1 GHz	< 1.45
Nominal input voltage for full-scale input		$\sqrt{V_i^2 + V_q^2} = 0.5 \text{ V}$
Damage voltage		+/- 2V

## Baseband characteristics

### Internal baseband characteristics

D/A converter		
Data rate		600 MHz
Resolution		16 bit
Sampling rate		1200 MHz (internal interpolation x 2)
Aliasing filter		
Bandwidth, rolloff to -0.1 dB		250 MHz (nom.)
I/Q impairments (digital baseband)		
These impairments are set in the digital baseband section of the R&S®SMBV100B. They act on the I/Q signal sent to the I/Q modulator/RF section, as well as on the I/Q signals at the analog or digital I/Q outputs (of the respective path).		
Carrier leakage		
Setting range		-10 % to +10 %
Resolution		0.01 %
I ≠ Q (imbalance)		
Setting range		-1 dB to +1 dB
Resolution		0.01 dB
Quadrature offset		
Setting range		-10° to +10°
Resolution		0.01°

## Analog I/Q outputs

Output impedance		50 $\Omega$ (nom.)
Output voltage	EMF (output voltage depends on set modulation signal)	1 V ( $V_p$ )
Offset	EMF	< 1 mV
Frequency response	at $R_L = 50 \Omega$	
Magnitude	up to 50 MHz	0.15 dB (meas.)
	up to 250 MHz	0.30 dB (meas.)
I/Q balance <sup>6</sup>	at $R_L = 50 \Omega$	
Magnitude	up to 50 MHz	0.15 dB (meas.)
	up to 250 MHz	0.30 dB (meas.)
Spectral purity	at $R_L = 50 \Omega$	
SFDR (sine)	up to 20 MHz	75 dB (meas.)
	up to 250 MHz	70 dB (meas.)
Wideband noise	10 MHz sine wave at 1 MHz offset	< -153 dBc, -160 dBc (typ.)

## Differential analog I/Q outputs (R&S<sup>®</sup>SMBVB-K17 option)

Output impedance		
Single-ended		
Differential		
Output voltage	output voltage depends on set modulation signal	
Single-ended	EMF	0.02 V to 2 V ( $V_p$ )
Resolution		0.02 mV
Differential	EMF	0.04 V to 4 V ( $V_p$ )
Resolution		1 mV
Bias voltage (single-ended and differential)	EMF	-3.6 V to +3.6 V <sup>7</sup>
Resolution		0.1 mV
Uncertainty		1 % + 4 mV
Offset voltage		
Differential	EMF	-300 mV to +300 mV
Resolution		0.02 mV
Uncertainty		1 % + 0.1 % $\times$ bias voltage + 1 mV
Differential signal balance	at $R_L = 50 \Omega$ , output voltage > 0.5 V ( $V_p$ )	
Magnitude	up to 50 MHz	0.15 dB (meas.)
	up to 250 MHz	0.30 dB (meas.)
Frequency response	at $R_L = 50 \Omega$ , output voltage > 0.5 V ( $V_p$ )	
Magnitude	up to 50 MHz	0.15 dB (meas.)
	up to 250 MHz	0.30 dB (meas.)
Wideband noise	10 MHz sine wave at 1 MHz offset	-162 dBc (meas.)

## Digital baseband input/output (R&S<sup>®</sup>SMBVB-K19 option)

The R&S<sup>®</sup>SMBVB-K19 option makes digital I/Q signals available on the rear panel of the instrument if set to output mode. External digital I/Q signals can be fed in to the baseband section at the same connector if set to input mode. The digital I/Q input/output can be used for the lossless connection of the R&S<sup>®</sup>SMBV100B to the digital I/Q input/output of other Rohde & Schwarz instruments (e.g. R&S<sup>®</sup>SMW200A vector signal generator). One R&S<sup>®</sup>SMBVB-K19 option can be installed.

### Output parameters

Interface		
Standard		in line with R&S <sup>®</sup> Digital I/Q Interface <sup>8</sup> , I/Q data and control signals, data and interface clock
Level		LVDS
Connector		26-pin MDR

<sup>6</sup> Value applies after 1 hour warm-up time and recalibration for 4 hours of operation and temperature variations of less than +5 °C.

<sup>7</sup> The magnitude of the sum of output voltage and bias voltage must not exceed 4 V.

<sup>8</sup> R&S<sup>®</sup>Digital I/Q Interface PAD-R is a Rohde & Schwarz internal company guideline for the transmission of digital I/Q data. It is supported by a wide range of signal generators, signal analyzers and radio communication testers.

I/Q sample rate	With source 'user-defined', the sample rate must be entered via the parameter 'sample rate', no I/Q data clock being necessary. With source 'digital I/Q out', the sample rate will be estimated on the basis of the applied I/Q data clock.	
Source		user-defined, digital I/Q out
Sample rate	max. sample rate depending on connected receiving device	400 Hz to 200 MHz
Resolution (user-defined)		0.001 Hz
Frequency uncertainty (user-defined)		$< (5 \times 10^{-14} + \text{relative deviation of reference frequency}) \times \text{sample rate (nom.)}$
I/Q data		
Resolution		up to 18 bit
Logic format		two's complement
Physical signal level		
Setting range		0 to -60 dBFS
Resolution		0.01 dBFS
Bandwidth (RF)	sample rate = 200 MHz (no interpolation, user-defined)	160 MHz
	sample rate < 200 MHz (interpolation)	0.8 × sample rate
Control signals	markers	3

### Input parameters

Input level		
Peak level		
Setting range		-60 dB to +3 dB, referenced to full scale
Resolution		0.01 dB
Crest factor		
Setting range		0 dB to +30 dB
Resolution		0.01 dB
Adjust level function	automatically determines peak level and crest factor of input signal	
I/Q swap	I and Q signals swapped	on/off
Interface		
Standard	in line with R&S®Digital I/Q Interface <sup>8</sup>	I/Q data and control signals, data and interface clock
Level		LVDS
Connector		26-pin MDR
I/Q sample rate	With source 'user-defined', the sample rate must be entered via the parameter 'sample rate', no I/Q data clock being necessary. With source 'digital I/Q in', the sample rate will be estimated on the basis of the applied I/Q data clock.	
Source		user-defined, digital I/Q in
Sample rate	max. sample rate depending on connected transmitting device	400 Hz to 200 MHz
Resolution	user-defined	0.001 Hz
Frequency uncertainty	user-defined	$< 4 \times 10^{-11} \text{ Hz} + \text{relative deviation of reference frequency} \times \text{sample rate (nom.)}$
I/Q data		
Resolution		18 bit
Logic format		two's complement
Bandwidth	sample rate = 200 MHz (no interpolation, user-defined)	160 MHz
	sample rate < 200 MHz (interpolation)	0.8 × sample rate
Control signals	markers	3

### I/Q baseband generator – arbitrary waveform mode

Waveform length	standard	1 sample to 64 Msample in one-sample steps
	with R&S®SMBVB-K511 option	1 sample to 256 Msample in one-sample steps
	with R&S®SMBVB-K511 and R&S®SMBVB-K512 options	1 sample to 1 Gsample in one-sample steps
	with R&S®SMBVB-K511, R&S®SMBVB-K512 and R&S®SMBVB-K513 options	1 sample to 2 Gsample in one-sample steps
Sample rate	standard	400 Hz to 150 MHz
	with R&S®SMBVB-K523 option	400 Hz to 300 MHz
	with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	400 Hz to 600 MHz

Sample resolution	equivalent to D/A converter	16 bit
Sample clock source		internal
Sample frequency error	internal clock	$< 4 \times 10^{-11}$ Hz + relative deviation of reference frequency $\times$ sample rate (nom.)
Bandwidth (RF)	using the maximum sample rate, rolloff to $-0.1$ dB	120 MHz
	using a reduced sample rate, rolloff to $-0.1$ dB	$0.83 \times$ sample rate
Bandwidth (RF) with R&S®SMBVB-K523 option	using the maximum sample rate, rolloff to $-0.1$ dB	240 MHz
	using a reduced sample rate, rolloff to $-0.1$ dB	$0.83 \times$ sample rate
Bandwidth (RF) with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	using the maximum sample rate, rolloff to $-0.1$ dB	500 MHz
	using a reduced sample rate, rolloff to $-0.1$ dB	$0.83 \times$ sample rate
Frequency offset setting range	standard	$-60$ MHz to $60$ MHz
	with R&S®SMBVB-K523 option	$-120$ MHz to $120$ MHz
	with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	$-250$ MHz to $250$ MHz
Frequency offset setting resolution		$0.01$ Hz
Frequency offset error		$< 3 \times 10^{-6}$ Hz+ relative deviation of reference frequency $\times$ frequency offset (nom.)
<b>Triggering</b>	A trigger event restarts I/Q generation. The I/Q signal is then synchronous with the trigger (with a specific timing jitter).	
Trigger source	event triggered via GUI or remote command	internal
	event triggered by external trigger signal	external
Trigger modes	The signal is generated continuously.	auto
	The signal is generated continuously. A trigger event causes a restart.	retrig
	The signal is started only when a trigger event occurs. Subsequent trigger events are ignored.	armed auto
	The signal is started only when a trigger event occurs. Every subsequent trigger event causes a restart.	armed retrig
	The signal is started only when a trigger event occurs. The signal is generated once.	single
External trigger input		selectable from USER 1, 2, 3, 4, 5
Connector type	USER 1, 2, 3, 4, 5	BNC female
Input level		$0$ V to $3$ V (nom.)
Threshold	USER 1, 2, 3, 4, 5	settable between $0.1$ V and $2.0$ V
Input impedance	selectable	$1$ k $\Omega$ or $50$ $\Omega$ (nom.)
Trigger jitter		$\pm 1.67$ ns
External trigger delay		
Setting range		$0$ sample to $2.147 \times 10^9$ sample
Setting resolution		$3.3$ ns
External trigger inhibit		
Setting range		$0$ sample to $(21.47s \times \text{sample rate})$ sample
Setting resolution		$3.3$ ns
External trigger pulse width		$> 7.5$ ns
<b>Marker signals</b>		
Number of marker signals		$3$
Operating modes		unchanged, restart, pulse, pattern, ratio
Marker outputs		selectable from USER 1, 2, 3, 4, 5
Connector type	USER 1, 2, 3, 4, 5	BNC female
Level		LVTTL
Marker delay		
Setting range		$0$ sample to $(\text{waveform length} - 1)$ sample
Setting resolution		$1$ sample
Marker duration		
Minimum value	sample rate $\leq 300$ MS/s	$1$ sample
	$300$ MS/s $<$ sample rate $\leq 600$ MS/s	$2$ samples

<b>Multisegment waveform mode</b>		
Number of segments		1 to 1024
Changeover modes		GUI, remote control, external trigger
Extended trigger modes		same segment, next segment, next segment seamless, sequencer
Seamless changeover		output up to end of current segment, followed by changeover to next segment
Sequencer play list length		max. 1024
Sequencer segment repetitions		max. 1048575
<b>Multicarrier waveform mode</b>		
Number of carriers		max. 512
Total RF bandwidth	standard	max. 120 MHz
	with R&S®SMBVB-K523 option	max. 240 MHz
	with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	max. 500 MHz
Carrier spacing		
Setting range		depends on number of carriers and signal RF bandwidth
Setting resolution		0.01 Hz
Crest factor modes		maximize, minimize, off
Signal period modes		longest file, shortest file, user (max. 1 s)
Single carrier gain		
Setting range		-80 dB to 0 dB
Setting resolution		0.01 dB
Single carrier start phase		
Setting range		0° to 360°
Setting resolution		0.01°
Single carrier delay		
Setting range		0 s to 1 s
Setting resolution		1 ns

## I/Q baseband generator – realtime operation (custom digital modulation) (R&S®SMBVB-K520 option)

<b>Types of modulation</b>		
ASK		
Modulation index		0 % to 100 %
Resolution		0.1 %
FSK		
Deviation		1 Hz to $15 \times f_{\text{sym}}$
Maximum	standard	30 MHz
	with R&S®SMBVB-K523 option	60 MHz
	with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	120 MHz
Resolution		0.1 Hz
Variable FSK		
Deviations		$-15 \times f_{\text{sym}}$ to $+15 \times f_{\text{sym}}$
Maximum	standard	30 MHz
	with R&S®SMBVB-K523 option	60 MHz
	with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	120 MHz
Resolution		0.1 Hz
PSK		
		BPSK, QPSK, QPSK 45° offset, QPSK EDGE, AQPSK, OQPSK, $\pi/4$ -QPSK, $\pi/2$ -DBPSK, $\pi/4$ -DQPSK, $\pi/8$ -D8PSK, 8PSK, 8PSK EDGE, 16APSK, 32APSK
QAM		
		16QAM, 32QAM, 64QAM, 128QAM, 256QAM, 1024QAM, 4096QAM $\pi/4$ -16QAM, $-\pi/4$ -32QAM (for EDGE+)
Symbol rate		
Operating mode		internal

Setting range	standard	
	ASK, PSK and QAM	50 Hz to 100 MHz
	FSK	50 Hz to 100 MHz
	with R&S®SMBVB-K523 option	
	ASK, PSK and QAM	50 Hz to 200 MHz
	FSK	50 Hz to 200 MHz
	with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	
	ASK, PSK and QAM	50 Hz to 300 MHz
	FSK	50 Hz to 300 MHz
Resolution		0.001 Hz
Frequency uncertainty (internal)		$< 4 \times 10^{-11}$ Hz + relative deviation of reference frequency $\times$ sample rate (nom.)
<b>Baseband filter</b>	any filter can be used with any type of modulation	
Filter types		cosine, root cosine, Gaussian, cdmaOne, cdmaOne + equalizer, cdmaOne 705 kHz, cdmaOne 705 kHz + equalizer, CDMA2000® 3x, APCO25 C4FM, EDGE narrow pulse, EDGE wide pulse rectangular, split phase, EUltra/LTE
Filter parameter		
Setting range	cosine, root cosine (filter parameter $\alpha$ )	0.05 to 1.00
	Gaussian (filter parameter $B \times T$ )	0.15 to 2.50
	split phase (filter parameter $B \times T$ )	0.15 to 2.50
Setting resolution		0.01
<b>Coding</b>	Not all coding methods can be used with every type of modulation.	off, differential, diff. + Gray, Gray, NADC, PDC, PHS, TETRA, APCO25 (PSK), APCO25 (8PSK), PWT, TFTS, VDL, EDGE, APCO25(FSK), ICO, CDMA2000®, WCDMA
<b>Data sources</b>		PRBS: 9, 11, 15, 16, 20, 21, 23, All 0, All 1, pattern (length: 1 bit to 64 bit), data lists, external
Data lists		
Output memory	standard	8 bit to 2 Gbit
	with R&S®SMBVB-K511 option	8 bit to 16 Gbit
	with R&S®SMBVB-K511 and R&S®SMBVB-K512 options	8 bit to 32 Gbit
	with R&S®SMBVB-K511, R&S®SMBVB-K512 and R&S®SMBVB-K513 options	8 bit to 64 Gbit
Nonvolatile memory	standard	internal mSATA module
	with R&S®SMBVB-B80 option	removable CFAST module
Predefined settings	modulation, filter, symbol rate and coding in line with standard	
Standards		APCO, Bluetooth®, CW in baseband, DECT, ETC, GSM, GSM EDGE, NADC, PDC, PHS, TETRA, WCDMA 3GPP, TD-SCDMA, CDMA2000® Forward, CDMA2000® Reverse, Worldspace
<b>Frequency offset</b>	With the aid of the frequency offset, the center frequency of the wanted baseband signal can be shifted. The restrictions caused by the modulation bandwidth still apply.	
Frequency offset setting range	standard	-60 MHz to +60 MHz
	with R&S®SMBVB-K523 option	-120 MHz to +120 MHz
	with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	-250 MHz to +250 MHz
Frequency offset setting resolution		0.01 Hz
Frequency offset error		$< 3 \times 10^{-6}$ Hz+ relative deviation of reference frequency $\times$ frequency offset (nom.)

<b>Triggering</b>		
Trigger source	event triggered via GUI or remote command	internal
	event triggered by external trigger signal	external
Trigger modes	signal is generated continuously	auto
	signal is generated continuously; a trigger event causes a restart.	retrig
	signal is started only when a trigger event occurs; subsequent trigger events are ignored	armed auto
	signal is started only when a trigger event occurs; every subsequent trigger event causes a restart	armed retrig
	signal is started only when a trigger event occurs; the signal is generated once	single
External trigger input		selectable from USER 1, 2, 3, 4, 5
Connector type	USER 1, 2, 3, 4, 5	BNC female
Input level		0 V to 3 V (nom.)
Threshold	USER 1, 2, 3, 4, 5	settable between 0.1 V and 2.0 V
Input impedance	selectable	1 k $\Omega$ or 50 $\Omega$ (nom.)
Trigger jitter		$\pm 1.67$ ns
External trigger delay		
Setting range		0 symbol to $2.147 \times 10^9$ symbol
Setting resolution		3.3 ns
External trigger inhibit		
Setting range		0 symbol to (21.47 s $\times$ symbol rate) symbol
Setting resolution		1 symbol
External trigger pulse width		> 7.5 ns
<b>Marker signals</b>		
Number of marker signals		3
Operating modes		control list, pulse, pattern, ratio
Marker outputs		selectable from USER 1, 2, 3, 4, 5
Connector type	USER 1, 2, 3, 4, 5	BNC female
Level		LV TTL
Marker delay		
Setting range		0 symbol to $(2^{24} - 1)$ symbol
Setting resolution		1 symbol
Marker duration		
Minimum value		1 symbol

## Baseband enhancements

### Additive white Gaussian noise (AWGN, R&S<sup>®</sup>SMBVB-K62 option)

Addition of an AWGN signal of settable bandwidth and settable C/N ratio or  $E_b/N_0$  to a wanted signal. If the noise generator is used, a frequency offset cannot be added to the wanted signal.

<b>Noise</b>		
Distribution density		Gaussian, statistical, separate for I and Q
Crest factor		> 15 dB
Periodicity		> $3 \times 10^{10}$ s
<b>C/N, <math>E_b/N_0</math></b>		
Setting range	depending on the set RF level; the PEP of the sum signal (wanted signal + noise) must not exceed the maximum possible PEP of the RF path	-50 dB to +45 dB
Setting resolution		0.01 dB
Uncertainty	for system bandwidth = symbol rate, symbol rate < 4 MHz, -24 dB < C/N < 30 dB and crest factor < 12 dB	< 0.1 dB

System bandwidth	bandwidth for determining noise power	
Setting range	standard	1 kHz to 120 MHz
	with R&S®SMBVB-K523 option	1 kHz to 240 MHz
	with R&S®SMBVB-K523 and R&S®SMBVB-K524 options	1 kHz to 500 MHz
Setting resolution	100 Hz	

## Envelope tracking (R&S®SMBVB-K540 option)

With this option, the analog I/Q outputs can be used to generate an analog signal corresponding to the envelope of the I/Q signal to test envelope tracking modulators.

Prerequisite: R&S®SMBVB-K17 option must be installed.

<b>General</b>		
Envelope voltage adaptation		auto normalized, auto power, manual
Output type		single-ended, differential
Bias voltage	see section "Differential analog I/Q outputs" or "Wideband differential analog I/Q outputs"	
Offset voltage	see section "Differential analog I/Q outputs" or "Wideband differential analog I/Q outputs"	
Envelope to RF delay		
Setting range		-1 µs to +1 µs
Setting resolution		1 ps
Shaping		off, linear, from table, polynomial, detrouching
<b>Envelope voltage adaptation modes: auto normalized and auto power</b>		
Power amplifier input power $P_{in}$		
Setting range		-145.00 dB to +30.00 dB
Setting resolution		0.01 dB
Power amplifier supply voltage $V_{cc}$	$V_{cc} = \text{envelope voltage} \times \text{DC modulator gain} + V_{cc, \text{Offset}}$	
DC modulator gain		-20.00 dB to +20.00 dB
Power amplifier offset voltage $V_{cc, \text{offset}}$		0 V to 30 V
<b>Envelope voltage adaptation mode: manual</b>		
Pregain		
Setting range		-20.00 dB to 0.00 dB
Setting resolution		0.01 dB
Postgain		
Setting range		-3.00 dB to +20.00 dB
Setting resolution		0.01 dB
Clipping level	upper and lower limit can be set separately	0 % to 100 %
Maximum output voltage	see "Output voltage" in section "Differential analog I/Q outputs"	

## AM/AM, AM/φM predistortion (R&S®SMBVB-K541 option)

State		on, off
Maximum input power ( $PEP_{in \text{ max}}$ )		
Setting range		-145.00 dB to +30.00 dB
Setting resolution		0.01 dB
Shaping		polynomial, from table

## User-defined frequency response correction (R&S®SMBVB-K544 option)

State		on, off
Scattering parameters		
File format		*.s<n>p (e.g. *.s2p)
Maximum number of points		16384
Number of datasets to be cascaded		up to 10
Additional frequency response		
File format		*.fres, *.ucor
Number of files		up to 5
Absolute level correction at center frequency	based on S-parameter data	on, off
Minimum compensation bandwidth		25 MHz

# Digital modulation systems

The specified data applies together with the parameters of the respective standard. The entire frequency range, the filter parameters and the symbol rates can be set by the user.

## Internal digital standards

Digital standards that run on the internal baseband generator. The R&S®SMBVB-K520 option must be installed. The options are described in the Digital Standards data sheet (PD 5213.9434.22).

<b>Cellular standards</b>
5G New Radio (R&S®SMBVB-K144 option)
EUTRA/LTE (R&S®SMBVB-K55 option)
EUTRA/LTE Release 9 and enhanced features (R&S®SMBVB-K84 option, R&S®SMBVB-K55 required)
EUTRA/LTE Release 10/LTE-Advanced (R&S®SMBVB-K85 option, R&S®SMBVB-K55 required)
LTE Release 11 and enhanced features (R&S®SMBVB-K112 option, R&S®SMBVB-K55 required)
EUTRA/LTE Release 12 (R&S®SMBVB-K113 option, R&S®SMBVB-K55 required)
LTE Release 13/14 (R&S®SMBVB-K119 option, R&S®SMBVB-K55 required)
Cellular IoT (R&S®SMBVB-K115 option)
3GPP FDD (R&S®SMBVB-K42 option)
3GPP FDD/HSPA/HSPA+, enhanced BS/MS tests (R&S®SMBVB-K83 option, R&S®SMBVB-K42 required)
GSM/EDGE (R&S®SMBVB-K40 option)
EDGE Evolution (R&S®SMBVB-K41 option, R&S®SMBVB-K40 required)
CDMA2000® (R&S®SMBVB-K46 option)
1xEV-DO (R&S®SMBVB-K47 option)
1xEV-DO Rev. B (R&S®SMBVB-K87 option, R&S®SMBVB-K47 required)
TD-SCDMA (3GPP TDD LCR) (R&S®SMBVB-K50 option)
TD-SCDMA (3GPP TDD LCR) enhanced BS/MS test including HSDPA (R&S®SMBVB-K51 option, R&S®SMBVB-K50 required)
<b>Wireless connectivity standards</b>
IEEE 802.11 a/b/g/n/j/p (R&S®SMBVB-K54 option)
IEEE 802.11 ac (R&S®SMBVB-K86 option, R&S®SMBVB-K54 required)
IEEE 802.11 ax (R&S®SMBVB-K142 option, R&S®SMBVB-K54 required)
Bluetooth® EDR/low energy (R&S®SMBVB-K60 option)
Bluetooth® 5.0 (R&S®SMBVB-K117 option, R&S®SMBVB-K60 option required)
<b>Other standards and modulation systems</b>
OFDM signal generation (R&S®SMBVB-K114 option)
Multicarrier CW signal generation (R&S®SMBVB-K61 option)
NFC A/B/F (R&S®SMBVB-K89 option)

## Digital standards with R&S®WinIQSIM2™

R&S®WinIQSIM2™ requires an external PC.

The options are described in the R&S®WinIQSIM2™ data sheet (PD 5213.7460.22).

<b>Cellular standards</b>
5G New Radio (R&S®SMBVB-K444 option)
Verizon 5GTF signals (R&S®SMBVB-K418 option)
EUTRA/LTE (R&S®SMBVB-K255 option)
EUTRA/LTE Release 9 and enhanced features (R&S®SMBVB-K284 option, R&S®SMBVB-K255 required)
EUTRA/LTE Release 10/LTE-Advanced (R&S®SMBVB-K285 option, R&S®SMBVB-K255 required)
LTE Release 11 and enhanced features (R&S®SMBVB-K412 option, R&S®SMBVB-K255 required)
EUTRA/LTE Release 12 (R&S®SMBVB-K413 option, R&S®SMBVB-K255 required)
LTE Release 13/14 (R&S®SMBVB-K419 option, R&S®SMBVB-K255 required)
Cellular IoT (R&S®SMBVB-K415 option)
3GPP FDD (R&S®SMBVB-K242 option)
3GPP FDD/HSPA/HSPA+, enhanced BS/MS tests (R&S®SMBVB-K283 option, R&S®SMBVB-K242 required)
GSM/EDGE (R&S®SMBVB-K240 option)
EDGE Evolution (R&S®SMBVB-K241 option, R&S®SMBVB-K240 required)
CDMA2000® (R&S®SMBVB-K246 option)
1xEV-DO (R&S®SMBVB-K247 option)
1xEV-DO Rev. B (R&S®SMBVB-K287 option, R&S®SMBVB-K247 required)
TD-SCDMA (3GPP TDD LCR) (R&S®SMBVB-K250 option)
TD-SCDMA (3GPP TDD LCR) enhanced BS/MS test including HSDPA (R&S®SMBVB-K251 option, R&S®SMBVB-K250 required)
<b>Wireless connectivity standards</b>
IEEE 802.11 a/b/g/n (R&S®SMBVB-K254 option)
IEEE 802.11 ac (R&S®SMBVB-K286 option, R&S®SMBVB-K254 required)
IEEE 802.11 ax (R&S®SMBVB-K442 option, R&S®SMBVB-K254 required)
Bluetooth® EDR/low energy (R&S®SMBVB-K260 option)
Bluetooth® 5.0 (R&S®SMBVB-K417 option, R&S®SMBVB-K260 option required)
<b>Navigation standards</b>
GPS 1 satellite (R&S®SMBVB-K244 option)
Galileo 1 satellite (R&S®SMBVB-K266 option)
Glonass 1 satellite (R&S®SMBVB-K294 option)
Beidou 1 satellite (R&S®SMBVB-K407 option)
<b>Broadcast standards</b>
DVB-H/DVB-T (R&S®SMBVB-K252 option)
DAB/T-DMB (R&S®SMBVB-K253 option)
<b>Other standards and modulation systems</b>
OFDM signal generation (R&S®SMBVB-K414 option)
Multicarrier CW signal generation (R&S®SMBVB-K261 option)
Additional white Gaussian noise (AWGN) (R&S®SMBVB-K262 option)
NFC A/B/F (R&S®SMBVB-K289 option)

## Options with external R&S®Pulse Sequencer software or R&S®Pulse Sequencer (DFS) software


The options are described in the pulse sequencer options data sheet (PD 3607.1388.22).

Pulse sequencing (R&S®SMBVB-K300 option)
Enhanced pulse sequencing (R&S®SMBVB-K301 option)
DFS signal generation (R&S®SMBVB-K350 option)

# Signal performance for digital standards and modulation systems

## 3GPP FDD (with R&S®SMBVB-K42 option)

Error vector magnitude	1 DPCH, RMS, frequency = 1800 MHz to 2200 MHz	< 0.8 %, 0.3 % (meas.)
Adjacent channel leakage ratio (ACLR)	test model 1, 64 DPCH, frequency = 1800 MHz to 2200 MHz, average channel power $\leq$ 0 dBm, I/Q input gain (GUI setting) = +4 dB, temperature range from +18 °C to +33 °C	
	5 MHz offset	> 69 dB
	10 MHz offset	> 71 dB

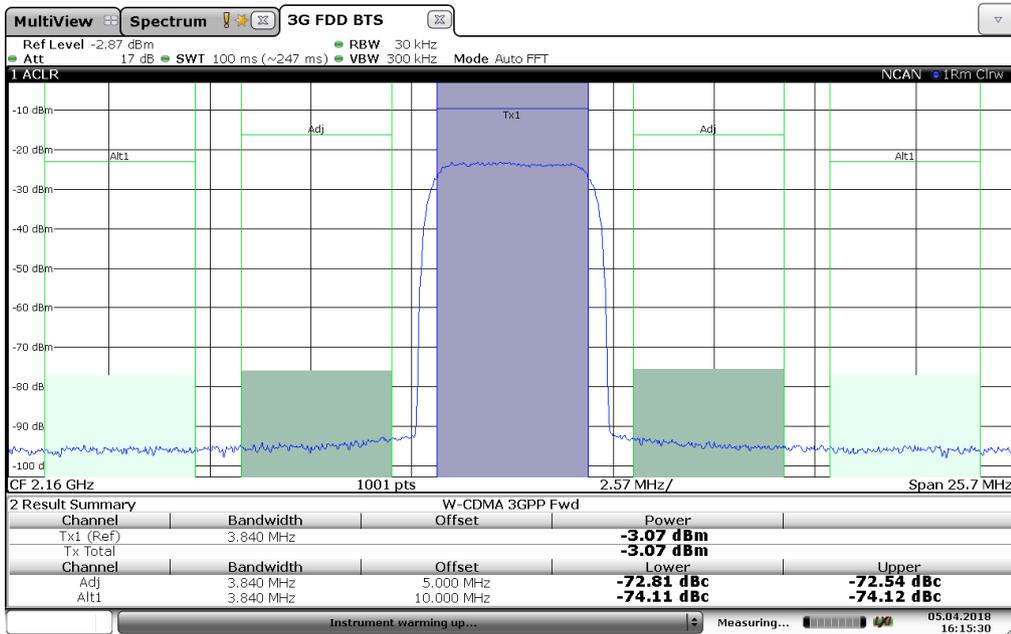


16:15:30 05.04.2018

Measured ACPR for 3GPP test model 1, 64 DPCH

## EUTRA/LTE (with R&S®SMBVB-K55 option)

Signal: LTE E-TM 3.1 10 MHz,  $f = 2.14$  GHz

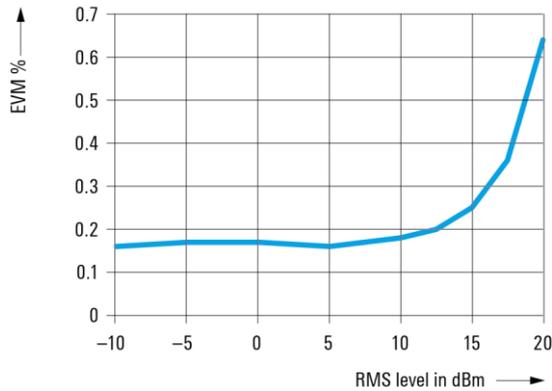

Measured EVM performance vs. RMS level  
(R&S®SMBV100B equipped with R&S®SMBVB-K31 and R&S®SMBVB-B32 options).

## Custom digital modulation (with R&S®SMBVB-K520 option, realtime mode)

Deviation error with 2FSK, 4FSK	deviation 0.2 to 0.7 × symbol rate	
	Gaussian filter with $B \times T = 0.2$ to 0.7, $f = 1$ GHz	
	symbol rate up to 2 MHz	0.4 % (meas.)
	symbol rate up to 10 MHz	1.2 % (meas.)
Phase error with MSK	Gaussian filter with $B \times T = 0.2$ to 0.7, $f = 1$ GHz	
	bit rate up to 10 MHz	0.3° (meas.)
EVM with QPSK, OQPSK, $\pi/4$ -DQPSK, 8PSK, 16QAM, 32QAM, 64QAM	cosine, root cosine filter with $\alpha = 0.2$ to 0.7, $f = 1$ GHz	
	symbol rate up to 5 MHz	0.5 % RMS (meas.)
	symbol rate up to 20 MHz	2.0 % RMS (meas.)

## Remote control

Interfaces/systems	standard	Ethernet/LAN 10/100/1000BASE-T IEC 60625 (GPIB IEEE-488.2), USB 2.0 (according to VISA USB-TMC), Serial (RS-232) <sup>9</sup>
Command set		SCPI 1999.5 or compatible command sets
Compatible command sets	<p>These command sets can be selected in order to emulate another instrument. A subset of common commands is supported.</p> <p>For each emulated instrument, the *IDN? and *OPT? strings can be configured to meet the specific requirements.</p> <p>This is particularly useful for the Aeroflex/IFR/Marconi instruments since the manufacturer ID changed over time and for the Hewlett-Packard/Agilent instruments to adapt to a specific suffix and configuration.</p>	<p><b>Hewlett Packard</b></p> <ul style="list-style-type: none"> <li>• HP 8340, HP 8341</li> <li>• HP 8360</li> <li>• HP 83620, HP 83622, HP 83623, HP 83624</li> <li>• HP 83630, HP 83640, HP 83650</li> <li>• HP 8373</li> <li>• HP 83711, HP 83712</li> <li>• HP 83731, HP 83732</li> <li>• HP 8642, HP 8643, HP 8644, HP 8645</li> <li>• HP 8647, HP 8648</li> <li>• HP 8656, HP 8657</li> <li>• HP 8662, HP 8664, HP 8665</li> <li>• HP 8673</li> </ul> <p><b>Agilent/Keysight Technologies</b></p> <ul style="list-style-type: none"> <li>• E4421, E4422, E4428, E4438</li> <li>• E8257, E8663</li> <li>• N5161, N5162, N5181</li> <li>• N5172B, N5182A, N5182B</li> </ul> <p><b>Aeroflex (IFR/Marconi)</b></p> <ul style="list-style-type: none"> <li>• 2023, 2024</li> <li>• 2030, 2031, 2032</li> <li>• 2040, 2041, 2042</li> <li>• 2050, 2051, 2052</li> <li>• 3416</li> </ul> <p><b>Anritsu</b></p> <ul style="list-style-type: none"> <li>• 68017, 68037</li> </ul> <p><b>Panasonic</b></p> <ul style="list-style-type: none"> <li>• VP-8303A</li> </ul> <p><b>Racal Dana</b></p> <ul style="list-style-type: none"> <li>• 3102, 9087</li> </ul> <p><b>Rohde &amp; Schwarz</b></p> <ul style="list-style-type: none"> <li>• R&amp;S<sup>®</sup>SME02/03/06</li> <li>• R&amp;S<sup>®</sup>SMF100A</li> <li>• R&amp;S<sup>®</sup>SMG/SMH</li> <li>• R&amp;S<sup>®</sup>SMGU/SMHU</li> <li>• R&amp;S<sup>®</sup>SML01/02/03</li> <li>• R&amp;S<sup>®</sup>SMP02/03/04</li> <li>• R&amp;S<sup>®</sup>SMR20/27/30/40</li> <li>• R&amp;S<sup>®</sup>SMT02/03/06</li> <li>• R&amp;S<sup>®</sup>SMY01/02</li> </ul>
IEC/IEEE bus address		0 to 30
Ethernet/LAN protocols and services		<ul style="list-style-type: none"> <li>• VISA VXI-11 (remote control)</li> <li>• Telnet/RawEthernet (remote control)</li> <li>• VNC (remote operation with web browser)</li> <li>• FTP (file transfer protocol)</li> <li>• SMB (mapping parts of the instrument to a host file system)</li> </ul>
Ethernet/LAN addressing		DHCP, static; support of ZeroConf and M-DNS to facilitate direct connection to a system controller

<sup>9</sup> Requires recommended extra R&S<sup>®</sup>TS-USB1.

# Connectors

## Front-panel connectors

RF 50 $\Omega$	RF output	N female
Sensor	connector for R&S®NRP-Zxx power sensor	6-pin ODU MINI-SNAP® series B
USB (2 connectors)	USB 2.0 (high speed) connector for external USB devices, mouse and keyboard for enhanced operation, R&S®NRP power sensors (with R&S®NRP-Z4 or R&S®NRP-ZKU adapter cable) for external power measurements and level adjustment of instrument, memory stick for software update and data exchange	USB type A
USER1, USER 2	user-configurable inputs or outputs, e.g. as trigger input or marker output	BNC female

## Rear-panel connectors

RF 50 $\Omega$	RF output with R&S®SMBVB-B81 option	N female
REF 1G IN	1 GHz reference frequency input	SMA female
REF 1G OUT	1 GHz reference frequency output	SMA female
REF IN	(variable) reference frequency input	BNC female
REF OUT	reference frequency output	BNC female
LF	modulation generator output	BNC female
MOD EXT	input for external analog modulation	BNC female
PULSE VIDEO	pulse generator output	BNC female
INST TRIG	trigger input for RF path, e.g. for frequency or level sweep, TTL 5 V compatible	BNC female
SIGNAL VALID	high state indicates that the instrument has settled to its final value	BNC female
LO IN	phase-coherent LO input	SMA female
LO OUT	phase-coherent LO output	SMA female
USB IN	USB 2.0 (high speed) remote control of instrument (USB-TMC)	USB type B micro USB
USB	USB 3.0 (high speed) connector for external USB devices, mouse and keyboard for enhanced operation, R&S®NRP power sensors (with R&S®NRP-Z4 or R&S®NRP-ZKU adapter cable) for external power measurements and level adjustment of instrument, memory stick for software update and data exchange	USB type A
LAN	provides remote control functionality and other services, see section "Remote control"	RJ-45
IEEE 488	remote control of instrument via GPIB	24-pin Amphenol series 57 female
I, $\bar{I}$	baseband output I, $\bar{I}$	BNC female
Q, $\bar{Q}$	baseband output Q, $\bar{Q}$	BNC female
I	I modulation input signal	BNC female
Q	Q modulation input signal	BNC female
USER 3, USER 4, USER 5	user-configurable inputs or outputs, e.g. as trigger input or marker output	BNC female
DIG IQ IN/OUT	digital input or output connectivity in line with R&S®Digital I/Q Interface	26-pin MDR

## General data

<b>Environmental conditions</b>		
Temperature	operating temperature range	0 °C to +55 °C
	storage temperature range	-40 °C to +71 °C
Damp heat		+40 °C, 90 % rel. humidity steady state in line with EN 60068-2-78
Altitude	operating, linear derating of max. ambient temperature to +45 °C starting at altitude = 3000 m	up to 4600 m (15000 ft)
	storage	up to 4600 m (15000 ft)
<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude const., 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g RMS, in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4, procedure I
<b>Power rating</b>		
Rated voltage		100 V to 240 V AC ( $\pm 10\%$ )
Rated frequencies		50 Hz to 60 Hz ( $\pm 5\%$ ), 400 Hz ( $\pm 5\%$ )
Rated current		3.5 A to 1.6 A (50 Hz to 60 Hz) 3.5 A to 2.9 A (400 Hz)
Rated power	when fully equipped	300 W (meas.)
Power factor correction		in line with EN 61000-3-2
<b>Product conformity</b>		
Electromagnetic compatibility	EU: in line with EMC Directive 2004/108/EC	applied harmonized standards: EN 61326-1 (industrial environment), EN 61326-2-1, EN 55011 (class A), EN 61000-3-2, EN 61000-3-3
Electrical safety	EU: in line with Low Voltage Directive 2006/95/EC	applied harmonized standard: EN 61010-1
	USA	UL 61010-1
	Canada	CAN/CSA-C22.2 No. 61010-1
International safety approvals	VDE – Association for Electrical, Electronic and Information Technologies	GS mark 40046635
	CSA – Canadian Standards Association	CSA <sub>UL</sub> mark 70133349
<b>Dimensions</b>	W x H x D	344 mm x 153 mm x 372 mm (13.54 in x 6.03 in x 14.65 in)
<b>Weight</b>	when fully equipped	10.5 kg (23.15 lb)
<b>Display</b>		7" color display with capacitive touch functionality
<b>Non-volatile memory</b>	standard	mSATA, 64 GByte
	with R&S-SMBVB-B80 option	CFAST, 64 GByte, removable (no internal mSATA)
<b>Calibration interval</b>		
Recommended calibration interval	when operated 40 h/week in the full range of the specified environmental conditions	3 years

# Ordering information

R&amp;S®SMBVB-Bxxx = hardware option

R&amp;S®SMBVB-Kxxx/KBxxx = software/keycode option

Designation	Type	Order No.
<b>Base unit</b>		
Vector Signal Generator <sup>10</sup> including baseband generator with ARB (64 Msamples, 120 MHz RF bandwidth), power cable and Quick Start Guide	R&S®SMBV100B	1423.1003.02
<b>Frequency options</b>		
8 kHz to 3 GHz	R&S®SMBVB-B103	1423.6270.02
Frequency Extension to 6 GHz	R&S®SMBVB-KB106	1423.6370.02
<b>RF options</b>		
OcXO Reference Oscillator	R&S®SMBVB-B1	1423.6470.02
High Performance OcXO Reference Oscillator	R&S®SMBVB-B1H	1423.6570.02
1 GHz Reference	R&S®SMBVB-B3	1423.7260.02
Flexible Reference Input from 1 MHz to 100 MHz	R&S®SMBVB-K704	1423.7618.02
High Output Power	R&S®SMBVB-K31	1423.6670.02
Ultra High Output Power	R&S®SMBVB-B32	1423.6711.02
Phase Coherence	R&S®SMBVB-K90	1423.7601.02
Pulse Modulator	R&S®SMBVB-K22	1423.7560.02
Pulse Generator	R&S®SMBVB-K23	1423.7576.02
Multifunction Generator	R&S®SMBVB-K24	1423.7582.02
AM/FM/φM	R&S®SMBVB-K720	1423.7599.02
<b>Baseband</b>		
Differential Analog I/Q outputs	R&S®SMBVB-K17	1423.7624.02
ARB memory Extension to 512 Msample	R&S®SMBVB-K511	1423.7653.02
ARB memory Extension to 1 Gsample	R&S®SMBVB-K512	1423.7660.02
ARB memory Extension to 2 Gsample	R&S®SMBVB-K513	1423.8589.02
Baseband Realtime Extension	R&S®SMBVB-K520	1423.7676.02
Baseband Extension to 240 MHz RF bandwidth	R&S®SMBVB-K523	1423.7682.02
Baseband Extension to 500 MHz RF bandwidth	R&S®SMBVB-K524	1423.7699.02
<b>Baseband enhancements</b>		
Additive White Gaussian Noise (AWGN)	R&S®SMBVB-K62	1423.7876.02
Envelope Tracking	R&S®SMBVB-K540	1423.7701.02
AM/AM, AM/φM Predistortion	R&S®SMBVB-K541	1423.7718.02
User-Defined Frequency Response Correction	R&S®SMBVB-K544	1423.8150.02
<b>Digital standards</b>		
GSM/EDGE	R&S®SMBVB-K40	1423.7724.02
EDGE Evolution	R&S®SMBVB-K41	1423.7730.02
3GPP FDD	R&S®SMBVB-K42	1423.7747.02
CDMA2000®	R&S®SMBVB-K46	1423.7760.02
1xEV-DO	R&S®SMBVB-K47	1423.7776.02
TD-SCDMA	R&S®SMBVB-K50	1423.7782.02
TD-SCDMA Enhanced BS/MS Tests	R&S®SMBVB-K51	1423.7799.02
IEEE 802.11 (a/b/g/n/l/p)	R&S®SMBVB-K54	1423.7824.02
EUTRA/LTE	R&S®SMBVB-K55	1423.7830.02
Bluetooth® EDR	R&S®SMBVB-K60	1423.7853.02
Multicarrier CW Signal Generation	R&S®SMBVB-K61	1423.7860.02
3GPP FDD HSPA/HSPA+, Enhanced BS/MS Tests	R&S®SMBVB-K83	1423.7899.02
EUTRA/LTE Release 9 and Enhanced Features	R&S®SMBVB-K84	1423.7901.02
EUTRA/LTE Release 10 (LTE-Advanced)	R&S®SMBVB-K85	1423.7918.02
IEEE 802.11ac	R&S®SMBVB-K86	1423.7924.02
1xEV-DO Rev. B	R&S®SMBVB-K87	1423.7930.02
LTE Release 11 and Enhanced Features	R&S®SMBVB-K112	1423.8037.02
LTE Release 12	R&S®SMBVB-K113	1423.8043.02
OFDM Signal Generation	R&S®SMBVB-K114	1423.8050.02
Cellular IoT	R&S®SMBVB-K115	1423.8066.02
DVB-S2/DVB-S2X	R&S®SMBVB-K116	1423.8072.02
Bluetooth® 5.0	R&S®SMBVB-K117	1423.8089.02
LTE Release 13 and 14	R&S®SMBVB-K119	1423.8108.02
IEEE 802.11ax	R&S®SMBVB-K142	1423.7901.02
5G NR	R&S®SMBVB-K144	1423.8608.02

<sup>10</sup> The base unit can only be ordered with an R&S®SMBVB-B103 frequency option.

<b>Digital standards using R&amp;S®WiniQSIM2™ 11</b>		
GSM/EDGE	R&S®SMBVB-K240	1423.8166.02
EDGE Evolution	R&S®SMBVB-K241	1423.8172.02
3GPP FDD	R&S®SMBVB-K242	1423.8189.02
GPS	R&S®SMBVB-K244	1423.8195.02
CDMA2000®	R&S®SMBVB-K246	1423.8208.02
1xEV-DO Rev A	R&S®SMBVB-K247	1423.8214.02
TD-SCDMA	R&S®SMBVB-K250	1423.8220.02
TD-SCDMA Enhanced BS/MS Tests	R&S®SMBVB-K251	1423.8237.02
DVB-H	R&S®SMBVB-K252	1423.8243.02
DAB/T-DMB	R&S®SMBVB-K253	1423.8250.02
802.11a/b/g/n	R&S®SMBVB-K254	1423.8266.02
EUTRA/LTE	R&S®SMBVB-K255	1423.8272.02
Bluetooth® EDR	R&S®SMBVB-K260	1423.8295.02
Multicarrier CW Signal Generation	R&S®SMBVB-K261	1423.8308.02
Additive White Gaussian Noise (AWGN)	R&S®SMBVB-K262	1423.8314.02
Galileo	R&S®SMBVB-K266	1423.8320.02
3GPP FDD HSPA/HSPA+, Enhanced BS/MS Tests	R&S®SMBVB-K283	1423.8337.02
EUTRA/LTE Release 9 and Enhanced Features	R&S®SMBVB-K284	1423.8343.02
EUTRA/LTE Release 10 (LTE-Advanced)	R&S®SMBVB-K285	1423.8350.02
IEEE 802.11ac	R&S®SMBVB-K286	1423.8366.02
1xEV-DO Rev. B	R&S®SMBVB-K287	1423.8372.02
NFC A/B/F	R&S®SMBVB-K289	1423.8389.02
Glonass 1 Satellite	R&S®SMBVB-K294	1423.8395.02
Modernized GPS	R&S®SMBVB-K298	1423.8408.02
Beidou	R&S®SMBVB-K407	1423.8489.02
LTE Release 11 and Enhanced Features	R&S®SMBVB-K412	1423.8495.02
EUTRA/LTE Release 12	R&S®SMBVB-K413	1423.8508.02
OFDM Signal Generation	R&S®SMBVB-K414	1423.8595.02
Cellular IoT	R&S®SMBVB-K415	1423.8514.02
DVB-S2/DVB-S2X	R&S®SMBVB-K416	1423.8520.02
Bluetooth® 5.0	R&S®SMBVB-K417	1423.8537.02
Verizon 5GTF Signals	R&S®SMBVB-K418	1423.8543.02
LTE Release 13 and 14	R&S®SMBVB-K419	1423.8550.02
IEEE 802.11ax	R&S®SMBVB-K442	1423.8566.02
5G NR	R&S®SMBVB-K444	1423.8614.02
<b>Options with external R&amp;S®Pulse Sequencer software or R&amp;S®Pulse Sequencer (DFS) software</b>		
Pulse Sequencing	R&S®SMBVB-K300	1423.8414.02
Enhanced Pulse Sequencing	R&S®SMBVB-K301	1423.8420.02
DF	R&S®SMBVB-K308	1423.8437.02
DFS Signal Generation	R&S®SMBVB-K350	1423.8443.02
<b>Other options</b>		
Removable Mass Storage	R&S®SMBVB-B80	1423.7160.02
Rear Panel Connector for RF Path	R&S®SMBVB-B81	1423.7360.02
<b>Recommended extras</b>		
19" Rack Adapter	R&S®ZZA-KNA33	1177.8090.00
USB Serial Adapter for RS-232 remote control	R&S®TS-USB1	6124.2531.00
Documentation of Calibration Values	R&S®DCV-2	0240.2193.18
R&S®SMBV100B Accredited Calibration (ISO 17025, ISO 9000)	R&S®SMBVB-ACA	1423.8620.02

<sup>11</sup> R&S®WiniQSIM2™ requires an external PC.

<b>Warranty</b>		
Base unit		3 years
All other items <sup>12</sup>		1 year
<b>Options</b>		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	
Extended Warranty with Accredited Calibration Coverage, one year	R&S®AW1	
Extended Warranty with Accredited Calibration Coverage, two years	R&S®AW2	

**Extended warranty with a term of one and two years (WE1 and WE2)**

Repairs carried out during the contract term are free of charge <sup>13</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

**Extended warranty with calibration coverage (CW1 and CW2)**

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>13</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

For product brochure, see PD 3607.8201.12 and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)

<sup>12</sup> For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

<sup>13</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.



## Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

## Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

Certified Environmental Management

**ISO 14001**

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 82 28 | +86 400 650 58 96  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3607.8201.22 | Version 01.02 | May 2018 (GK)

R&S®SMBV100B Vector Signal Generator

Data without tolerance limits is not binding | Subject to change

© 2018 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3607820122