


Pyramid P30

RF Pyramid Probe® card
for filters and switchers

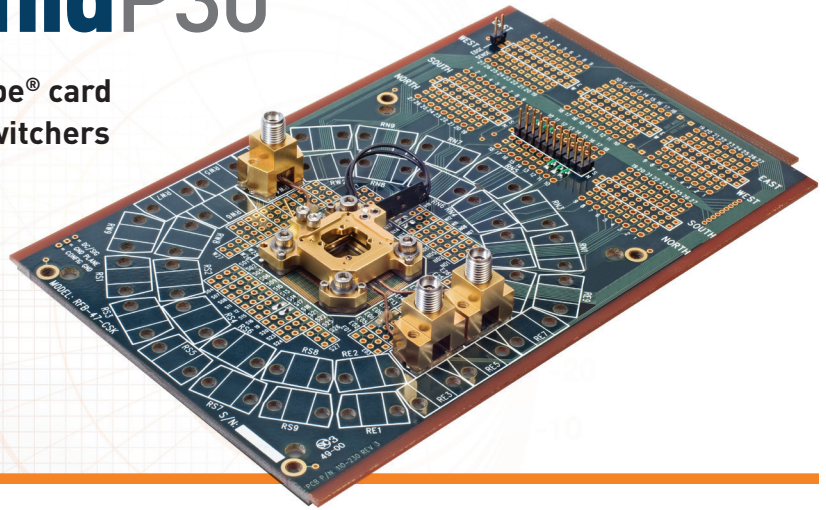

DATA SHEET

Cascade Microtech's P30 RF Pyramid Probe cards have been specifically designed to ensure your success for the high-volume production test of RF filters and switches used in cell phones, base stations and wireless devices. The P30 probe card is a superior, cost-effective alternative to coaxial-style RF probe cards for high-volume testing of RF filters and switches. The P30's outstanding RF performance, isolation, low ground inductance and contact resistance are identical to the flagship wireless RF Pyramid Probe cards. Application-focused, the P30 is optimized for peripheral pads, 50 Ω impedance transmission lines and DC control lines. Cascade Microtech's innovative Pyramid Plus™ manufacturing process ensures a lower cost for test, while delivering superior RF signal integrity — all in a single solution.

FEATURES / BENEFITS

Superior signal performance	High-bandwidth RF transmission lines to probe tips guarantee performance and ensure low signal loss. Low-inductance ground planes prevent device resonance and maximize isolation. Consistent low contact resistance and low-inductance probe tips ensure accurate and repeatable high-speed digital measurements.
Mechanical robustness	MicroScrub® technology provides consistent low contact resistance and inductance on a variety of pad materials and flip-chip bumps. High-density photolithographically placed contact probe tips are stable over lifetime of product. Low maintenance and permanent probe tip placement improve test cell uptime, reducing the cost of ownership compared to other probing technologies.
Versatile and cost-effective	Lower maintenance overhead with less cleaning and no need for probe tip alignment. Field-replaceable cores feature fully integrated test-vendor identification capabilities.
Advanced membrane technology	Cascade Microtech's industry-leading Pyramid Plus manufacturing process delivers higher performance, plus unique features that lower your cost of test.

MECHANICAL

Minimum pitch	50 μm
Dimensional stability for lifetime	10 μm for single temperature
Probe tip size	12 μm Al, Cu (nominal), 18 μm Low K/PoAA (nominal), 25 μm Au solder balls (nominal)
Probe tip material	Non-oxidizing nickel alloy
Temperature range	-50°C to 125°C
Pad and bump materials	Al, Cu, Au, all types of solder balls
Spring rate	1.67 g/mil
Edge sense	Optional

ELECTRICAL

Leakage	1 nA/V
Contact resistance	0.1 to 0.2 Ω (Al pads), 0.005 to 0.010 Ω (Au pads)
Maximum current/tip	1 A (Au pads), 200 mA (Al pads, Cu pads and solder balls)
Maximum power	+33 dBm CW, +39 dBm pulsed

SIGNAL TRACE PERFORMANCE

RF signal line impedance	50 Ω nominal, Range 50 Ω only
Ground inductance (typical)	0.04 nH
Return loss (S_{11})	> 10 dB @ 20 GHz
Input reflection	± 80 mrho @ 50 Ω
Signal trace length matching	Custom line match ± 1.5 ps (3 ps window)

SERIES PATH RESISTANCE (SPR)

DC resistance	1 Ω
Microstrip	1.2 Ω
Co-Planar Waveguide (CPW)	0.8 Ω

TYPICAL ISOLATION MEASUREMENTS


2 GHz	50 dB to 70 dB
10 GHz	-50 dB
20 GHz	-45 dB

PYRAMID CORE OPTIONS

I/O capacity	42
Maximum RF channels	14
XY area (mm)	4.1 x 4.1

RF BANDWIDTH AND RISETIME PERFORMANCE

MEMBRANE	PCB	CONNECTOR	BANDWIDTH	RISETIME
Microstrip	Coax	K or V	20 GHz	22 ps
CPW	Coax	K or V	20 GHz	15 ps

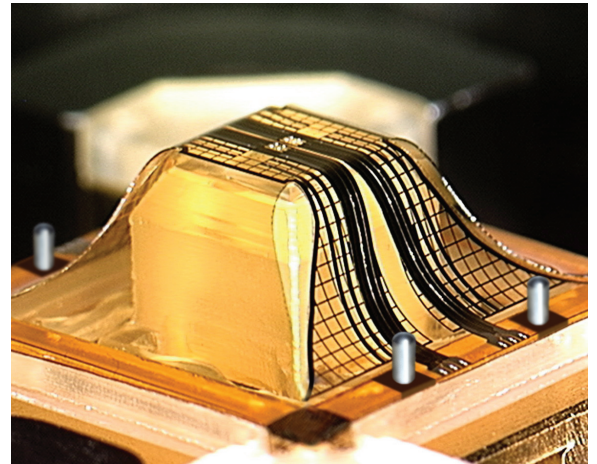

The P30 core design features controlled impedance signal traces that extend to the probe tip, in a reduced membrane area.

© Copyright 2012 Cascade Microtech, Inc.
All rights reserved. Cascade Microtech, MicroScrub and
Pyramid Probe are registered trademarks, and Pyramid
Plus is a trademark of Cascade Microtech, Inc. All other
trademarks are the property of their respective owners.

Data subject to change without notice

PYRAMIDP30-DS-0212

Cascade Microtech, Inc.
Corporate Headquarters
toll free: +1-800-550-3279
phone: +1-503-601-1000
email: cmi_sales@cmicro.com

Germany
phone: +49-89-9090195-0
email: cmg_sales@cmicro.com

Japan
phone: +81-3-5615-5150
email: cmj_sales@cmicro.com

China
phone: +86-21-3330-3188
email: cmc_sales@cmicro.com

Singapore
phone: +65-6873-7482
email: cms_sales@cmicro.com

Taiwan
phone: +886-3-5722810
email: cmt_sales@cmicro.com

PyramidP30

www.cascademicrotech.com

