


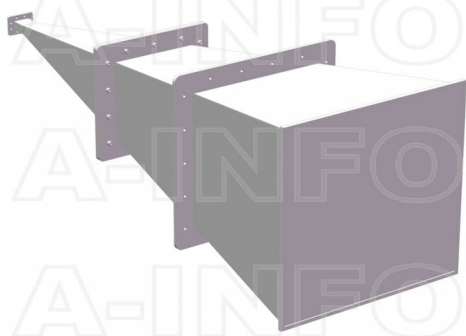

LB-137-25-ASPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain Rectangular Waveguide Interface

Standard Gain Horn Antenna Operating From 5.85GHz to 8.2GHz With a Nominal 25dB Gain With Rectangular Waveguide Interface

Product Information

SKU	LB-137-25-ASPO
-----	----------------

Description

Standard Gain Horn Antenna LB-137-25-ASPO, operating from 5.85 to 8.2GHz with a nominal 25dB gain and low VSWR 1.15:1 with FDP70 output. The model LB-137-25-ASPO has uniform gain through its frequency span, providing efficient performance characteristics and directionality. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	5.85	Output Type	Waveguide
Frequency, Max (GHz)	8.2	Flange Style	Rectangular
Waveguide Type	Rectangular	Flange Type	Cover
Waveguide Size EIA WR	WR137	Flange Designation	FDP70(UDR70)
Gain, Typ (dBi)	25	Mechanical Specification	
Polarization	Linear	Figure	A Type
3dB Beamwidth, E-Plane, Typ (Deg.)	7	Body Material	Al
3dB Beamwidth, H-Plane, Typ (Deg.)	8	Finish	Chemical Conversion Coating, Gray Paint
Cross Pol. Isolation, Typ (dB)	40	Size, W (mm)	462
VSWR, Typ	1.15:1	Size, H (mm)	432
		Size, L (mm)	1404
		Weight, (kg)	14.5

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	--	--------------	---

Outline Drawing

FDP70 Output with Radome (Option, P/N: LB-137-25-ASPO, Outdoor Application)

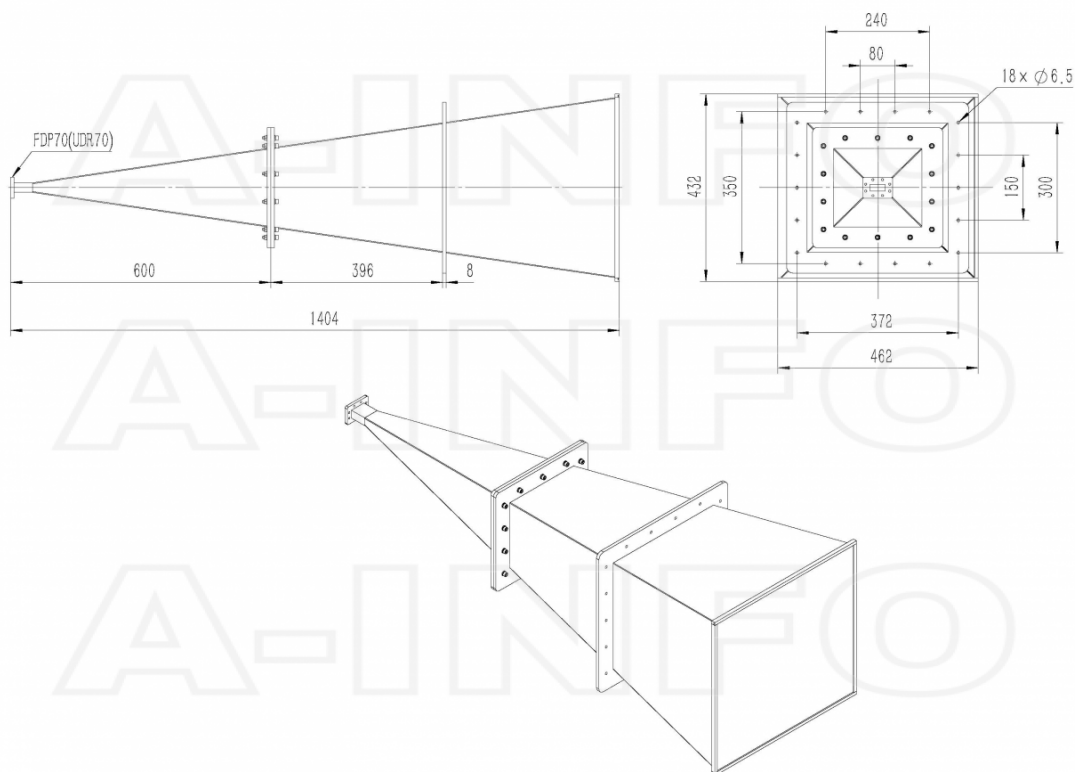


Flange Drawing

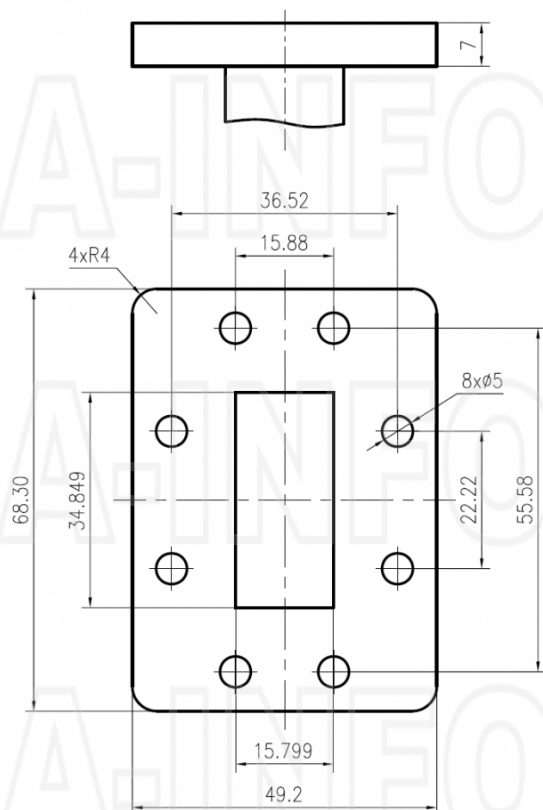


FDP70

Typical Test Results

Gain

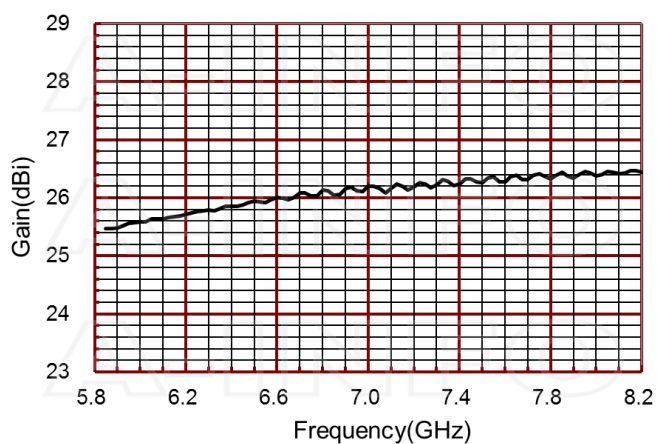


Antenna Factor

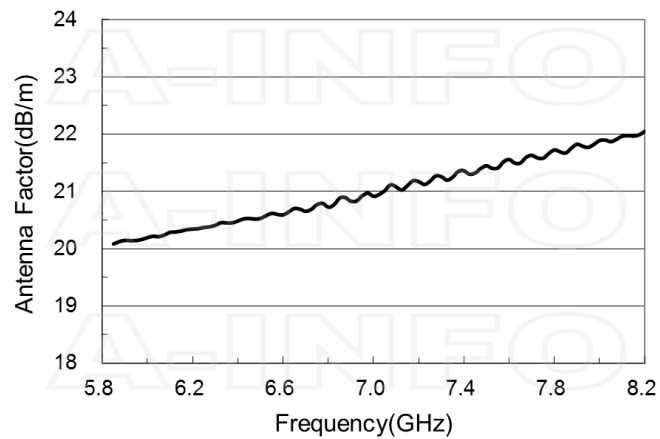




Antenna Factor (Table)

Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)		Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)
5.85	25.47	20.08		7.10	26.16	21.08
5.90	25.48	20.15		7.20	26.19	21.17
6.00	25.58	20.19		7.30	26.22	21.26
6.10	25.63	20.29		7.40	26.24	21.36
6.20	25.72	20.34		7.50	26.26	21.45
6.30	25.79	20.41		7.60	26.27	21.56
6.40	25.85	20.48		7.70	26.31	21.63
6.50	25.94	20.53		7.80	26.33	21.73
6.60	26.01	20.59		7.90	26.34	21.82
6.70	26.08	20.65		8.00	26.38	21.89
6.80	26.14	20.72		8.10	26.41	21.97
6.90	26.16	20.83		8.20	26.44	22.05
7.00	26.20	20.91				

VSWR

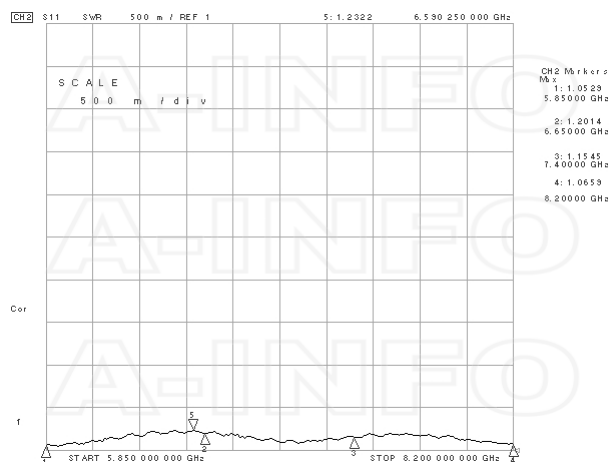

Pattern

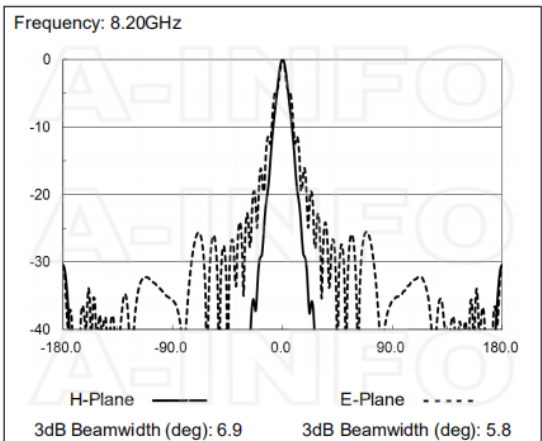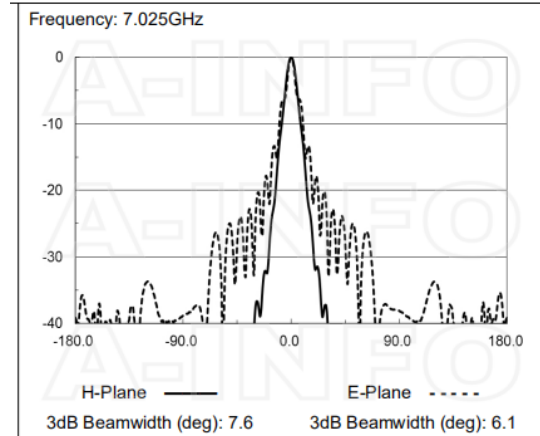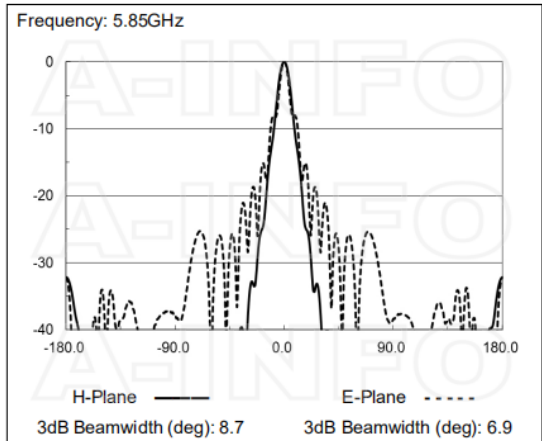

Related Products



137WCAN Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to N Type Female



137WCANM Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to N Type Male



137WCAS Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to SMA Female



137WCASM Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to SMA Male



137WCAT Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to TNC Female



137WCATM Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to TNC Male



137WCA7 Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to 7mm



137WCA3.5 Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to 3.5mm Female



137WCA3.5M Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to 3.5mm Male



137WCAK Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to 2.92mm Female



137WCAKM Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to 2.92mm Male



137WCA2.4 Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to 2.4mm Female



137WCA2.4M Right Angle Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to 2.4mm Male



137WECAN Endlaunch Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to N Type Female



137WECANM Endlaunch Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to N Type Male



137WECAS Endlaunch Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to SMA Female



137WECAM Endlaunch Rectangular Waveguide to Coaxial Adapter 5.85-8.2GHz WR137 to 2.92mm Female



LB-137-25-MB2 Round Type Mounting Bracket



LB-137-25-L2 L type mounting bracket



M5x25 Hex_Pack WR137 Flange Assembly Pack


Similar Products



LB-137-25-A Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain Rectangular Waveguide Interface




LB-137-25-C-NF Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain N Type Female



LB-137-25-C-NFSPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain N Type Female




LB-137-25-C-SF Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain SMA Female



LB-137-25-C-SFSPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain SMA Female




LB-137-25-C-TF Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain TNC Female



LB-137-25-C-TFSPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain TNC Female




LB-137-25-C-7 Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain 7mm



LB-137-25-C-7SPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain 7mm



LB-137-25-C-3.5F Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain 3.5mm Female



LB-137-25-C-3.5FSPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain 3.5mm Female

About this Datasheet

● Product Information Product Link: https://www.ainfoinc.com/lb-137-25-aspo-standard-gain-horn-antenna-5-85-8-2-ghz-25db-gain-fdp70 Data subject to change without notice. © A-INFO INC. 2023. All Rights Reserved	● Contact Us Address:dd 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com	● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
--	---	---