
# pco.edge 4.2 bi

cooled **sCMOS** camera








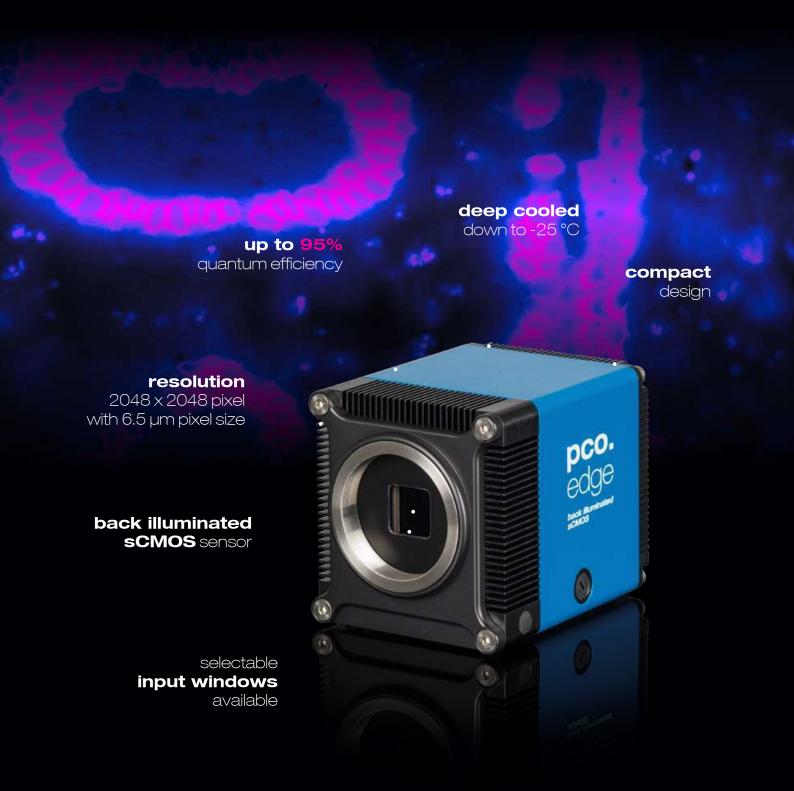


### pco.edge 4.2 bi





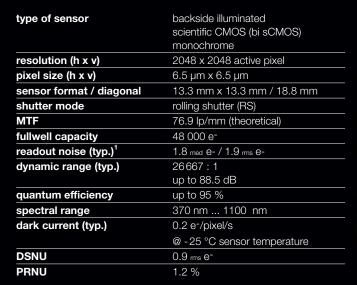



frame rate	40 fps
	@ full resolution
exposure / shutter time	10 μs 20 s
dynamic range A/D <sup>2</sup>	16 bit
A/D conversion factor	0.73 e-/count
pixel scan rate	46.0 MHz
pixel data rate	184.0 Mpixel/s
binning horizontal	x1, x2, x4
binning vertical	x1, x2, x4
region of interest (ROI)	horizontal: steps of 32 pixels
	vertical: steps of 8 pixels
non linearity	< 0.6 %
cooling method	adjustable: from - 25 °C to + 20 °C
	peltier with forced air (fan)
	and water cooling
	calibration setpoint: - 10 °C
trigger input signals	frame trigger, acquire (SMA connectors)
trigger output signals	exposure, busy (SMA connectors)
data interface	USB 3.1 Gen 1
time stamp	in image (1 µs resolution)






### pco.edge 4.2 bi





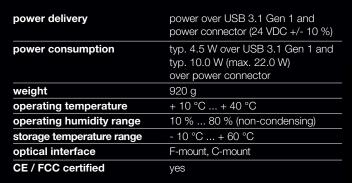

<sup>&</sup>lt;sup>1</sup> The readout noise values are given as median (med) and root mean square (rms) values, due to the different noise models, which can be used for evaluation.

#### frame rate table


40 fps
80 fps
159 fps
300 fps
520 fps
76 fps
68 fps
80 fps
170 fps
317 fps






due to the different noise models, which can be used for evaluation. 


The high dynamic signal is simultaneously converted at high and low gain by two 12 bit A/D converters and the two 12 bit values are sophistically merged into one 16 bit value.








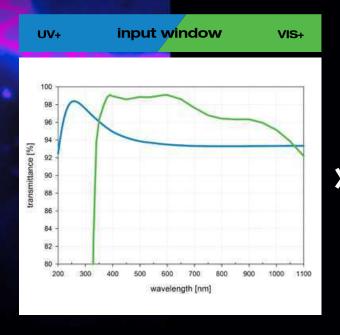

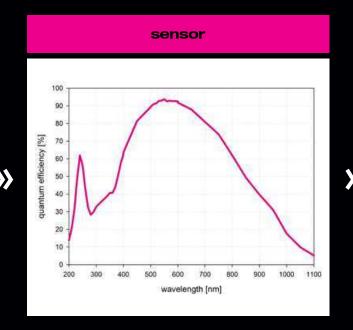

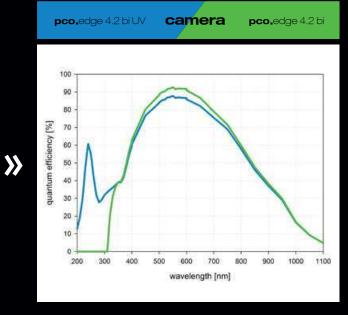







#### dimensions

F-mount and C-mount lens changeable adapter.

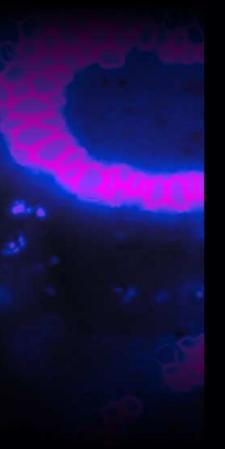

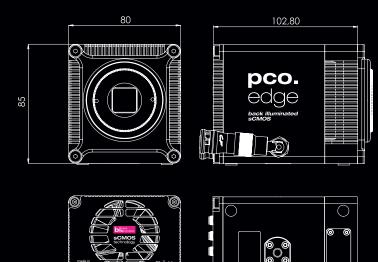

All dimensions are given in millimeter.

### » camera view









#### technical specifications

### pco.edge 4.2 bi



#### >> software

Camware is the application software for camera control, image acquisition and archiving of images in various file formats (Microsoft Windows®). A camera SDK (software development kit) including a 32 / 64 bit dynamic link library for user customization and integration on Microsoft Windows and Linux platforms is available for free. Please visit our website to get the latest camera interface drivers and software.

#### >> applications

brightfield microscopy microscopy | fluorescence microscopy | digital pathology | single molecule localization microscopy | lightsheet fluorescence microscopy (LSFM) | calcium imaging | FRET | FRAP | structured illumination microscopy (SIM) | highspeed bright field ratio imaging | high throughput screening | high content screening | biochip reading | TIRF microscopy | spinning disk confocal microscopy | 3D metrology | ophthalmology | photovoltaic inspection | industrial quality inspection | lucky astronomy | bio luminescence | chemo luminescence

#### >> third party integrations











#### find us

## europe PCO AG

Donaupark 11 93309 Kelheim, Germany

+49 9441 2005 50 info@pco.de pco.de

#### america

PCO-TECH Inc. 6930 Metroplex Drive Romulus, Michigan 48174, USA

+1 248 276 8820 info@pco-tech.com pco-tech.com

#### asia

PCO Imaging Asia Pte. 3 Temasek Ave Centennial Tower, Level 34 Singapore, 039190

+65 6549 7054 info@pco-imaging.com pco-imaging.com

Suzhou PCO Imaging Technology Co., Ltd. Room A10, 4th Floor, Building 4 Ascendas Xinsu Square, No. 5 Xinghan Street Suzhou Industrial Park, China 215021

+86 512 67634643 info@pco.cn pco.cn



















for application stories please visit our website







