

Mako G

G-158



- Power over Ethernet
- IEEE 1588 PTP
- Trigger over Ethernet
- Ultra-compact design

GigE Vision camera featuring the Sony IMX273 CMOS sensor

Mako G-158 is a 1.58 megapixel GigE machine vision camera that incorporates the high quality Type 1/2.9 (6.3 mm diagonal) Sony IMX273 CMOS sensor. At full resolution, this camera runs 75.2 frames per second. With a smaller region of interest, higher frame rates are possible. The Mako G-158 is an ideal replacement for legacy CCD models.

Mako G cameras have an ultra-compact form factor and the same mounting positions as many analog cameras. All models include Power over Ethernet (PoE), three opto-isolated outputs, and a 64 MB image buffer. The image quality profits from the precisely aligned sensor. By default monochrome models ship with no optical filter and color models ship with IRC Hoya C-5000 IR cut filter.

Benefits and features:

- Monochrome (G-158B) and color (G-158C) models
- GigE Vision interface with Power over Ethernet
- Screw mount RJ45 Ethernet connector for secure operation in industrial environments
- IEEE 1588 Precision Time Protocol (PTP) allows for easy synchronization of multiple cameras and devices on network
- Trigger over Ethernet (ToE) Action Commands allow for a single cable solution to reduce system costs
- Supports cable lengths up to 100 meters (CAT-5e or CAT-6)
- Comprehensive I/O functionality for simplified system integration
- Popular C-Mount lens mount
- Easy camera mounting via standard M3 threads on top and bottom of housing or optional tripod adapter
- Easy software integration with Allied Vision's [Vimba SDK](#) and compatibility to the most popular [third party image-processing libraries](#).
- Available with protection glass, IR cut filter, or IR pass filter



See the [Modular Concept](#) for lens mount and optical filter options.
 See the [Customization and OEM Solutions](#) webpage for additional options.

Specifications

| Mako G | G-158 |
|--|---|
| Interface | IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE) |
| Resolution | 1456 (H) × 1088 (V) |
| Sensor | Sony IMX273 |
| Sensor type | CMOS |
| Shutter mode | Global shutter |
| Sensor size | Type 1/2.9 |
| Pixel size | 3.45 μm × 3.45 μm |
| Lens mounts (available) | C-Mount, CS-Mount, M12-Mount |
| Max. frame rate at full resolution | 75.2 fps |
| ADC | 12 Bit |
| Image buffer (RAM) | 64 MByte |
| Imaging performance | |
| Imaging performance data is based on the evaluation methods in the EMVA 1288 Release 3.1 standard for characterization of image sensors and cameras. Measurements are typical values for monochrome models measured at full resolution without optical filter. Contact Sales or AE for more information. | |
| Quantum efficiency at 529 nm | 64 % |
| Temporal dark noise | 2.2 e ⁻ |
| Saturation capacity | 10500 e ⁻ |
| Dynamic range | 71.5 dB |
| Absolute sensitivity threshold | 2.8 e ⁻ |
| Output | |
| Bit depth | 12 Bit |
| Monochrome pixel formats | Mono8, Mono12, Mono12Packed |
| YUV color pixel formats | YUV411Packed, YUV422Packed, YUV444Packed |
| RGB color pixel formats | RGB8Packed, BGR8Packed |
| Raw pixel formats | BayerRG8, BayerRG12, BayerRG12Packed |
| General purpose inputs/outputs (GPIOs) | |
| Opto-isolated I/Os | 1 input, 3 outputs |
| Operating conditions/dimensions | |
| Operating temperature | +5 °C to +45 °C housing temperature |
| Power requirements (DC) | 12 to 24 VDC AUX or 802.3at Type 1 PoE |
| Power consumption | 2.43 W at 12 VDC; 2.68 W PoE |
| Mass | 80 g (with C-Mount) |

Mako G

Body dimensions (L × W × H in mm)


Regulations

G-158

60.5 × 29.2 × 29.2 (including connectors)

CE: 2014/30/EU (EMC), 2011/65/EU, including amendment 2015/863/EU (RoHS); FCC Class B; CAN ICES-003

Quantum efficiency

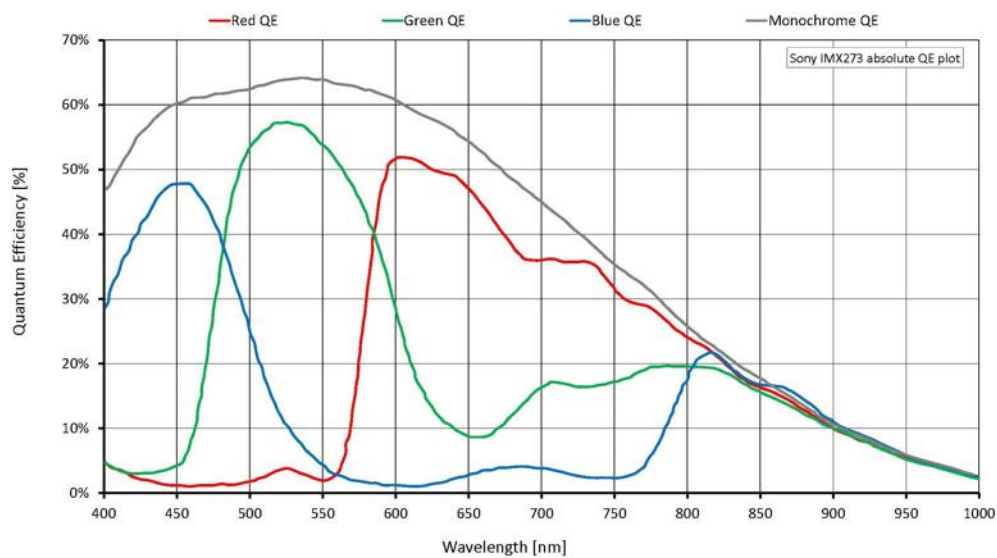

Features

Image optimization features:


- Auto gain (manual gain control: 0 to 40 dB; 0.1 dB increments)
- Auto exposure (exposure time control varies by pixel format)
- Auto white balance (G-158C only)
- Binning
- Color transformation, hue, saturation (G-158C only)
- Decimation
- Gamma correction
- One look-up table (LUT)
- Region of interest (ROI), separate ROI for auto features



Camera control features:

- Event channel
- Image chunk data
- IEEE 1588 Precision Time Protocol (PTP)
- Storable user sets
- StreamBytesPerSecond (bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Temperature monitoring (main board)
- Trigger over Ethernet (ToE) Action Commands

Technical drawing

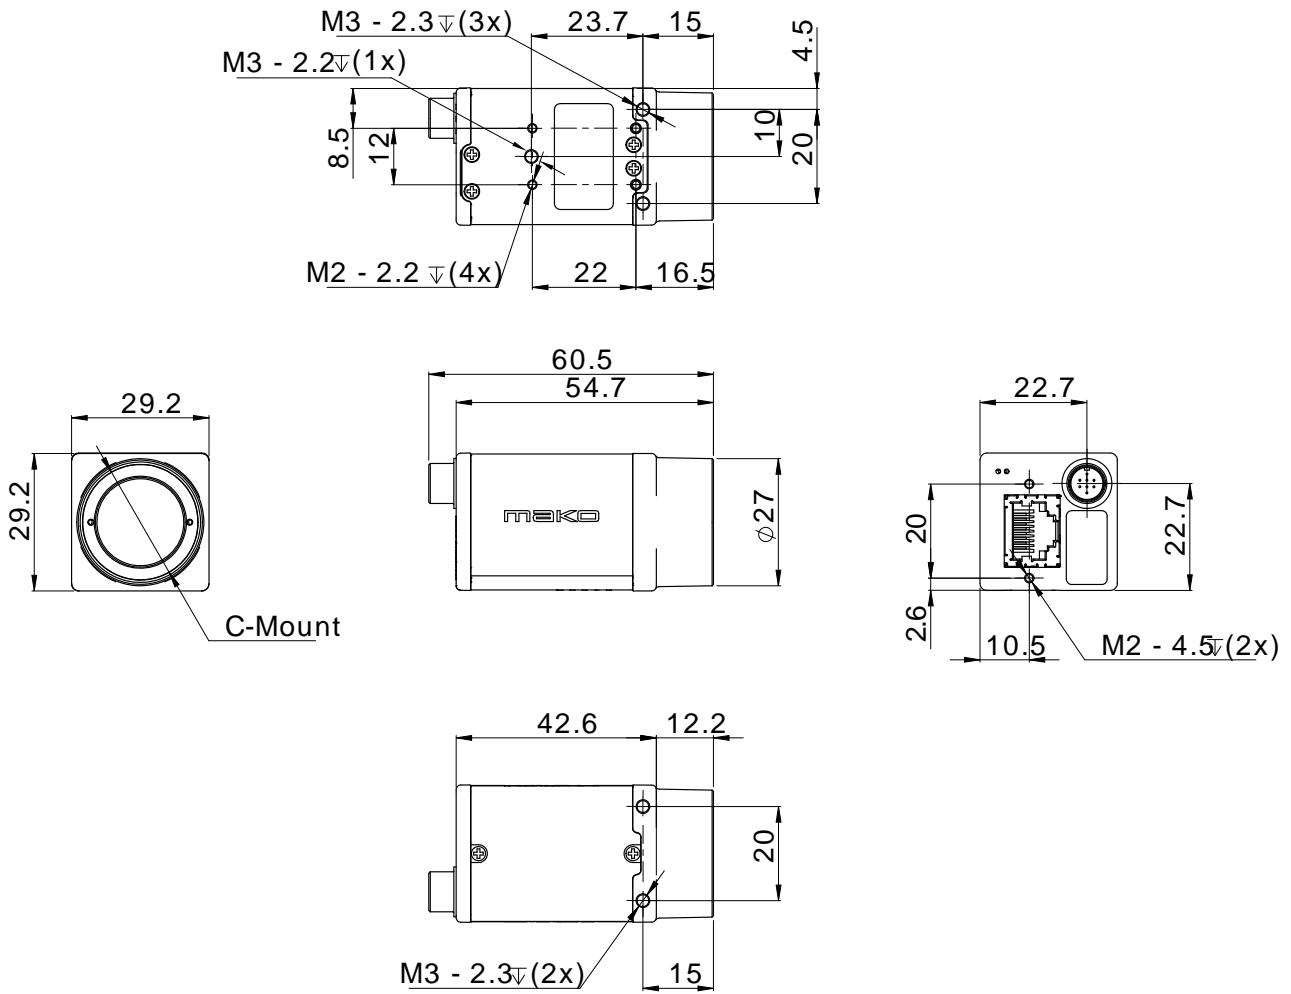



Applications

Mako G-158 is suitable for a wide range of applications including:

- Robotics
- Quality control
- Inspection, surveillance
- Industrial imaging
- Machine vision
- Logistics