

QDC6060H

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

QDC6060H series Drop-In Circulators cover frequency range 20~400MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency	Bandwidth	Insertion Loss	Isolation	VSWR	Average Power	Temperature
(MHz)	(MHz)	(dB Max.)	(dB Min.)	(Max.)	(W)	(°C)
20~30	0	2.00	18.0	1.30	10~100	-10~+60
30~80	0	1.20	20.0	1.25	10~100	-10~+60
30~80	5	1.80	18.0	1.30	10~100	-10~+60
88~108	20	0.60	20.0	1.25	10~100	-10~+60
100~140	40	1.20	18.0	1.30	10~100	-10~+60
108~118	10	0.50	20.0	1.20	10~100	-10~+60
116~138	22	0.60	20.0	1.25	10~100	-10~+60
130~180	50	0.60	20.0	1.25	10~100	-10~+60
136~174	38	0.50	20.0	1.25	10~100	-10~+60
150~170	20	0.40	20.0	1.20	10~100	-10~+60
170~230	60	0.60	20.0	1.25	10~100	-10~+60
225~400	175	0.80	18.0	1.30	10~100	-10~+60

Outline Drawings

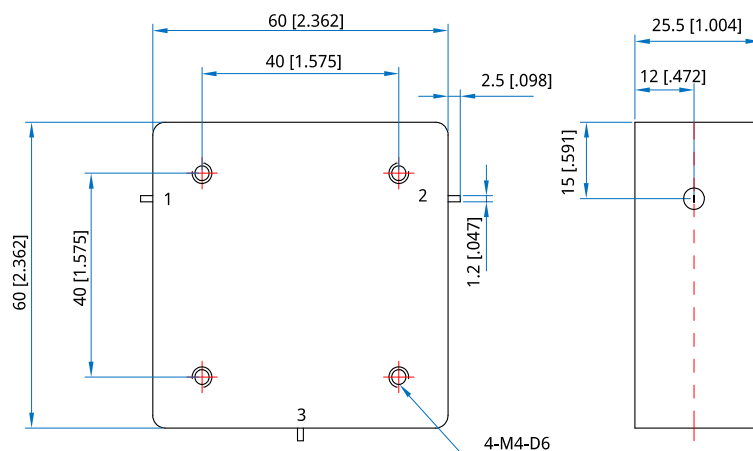

Unit: mm [inch]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Mechanical

Size*1: 60*60*25.5mm
2.362*2.362*1.004in
Connector Type: Strip line
Mounting: 4-M4, depth 6mm

[1] Exclude connectors

Direction Naming Rules:

- 1 - Clockwise
- 2 - Anticlockwise

How To Order**QDC6060H-W-X-Y-Z**

W: Start frequency in MHz

X: Stop frequency in MHz

Y: Average Power in W

Z: Direction type

Examples:

To order a QDC6060H series Circulator, 70~75MHz, 50W, Clockwise, specify QDC6060H-70-75-50-1.

Customization is available upon request.