


High Power X6, E Band Active Multiplier 75-88GHz, Pout=+27dBm ,WR-12

2021-12-16

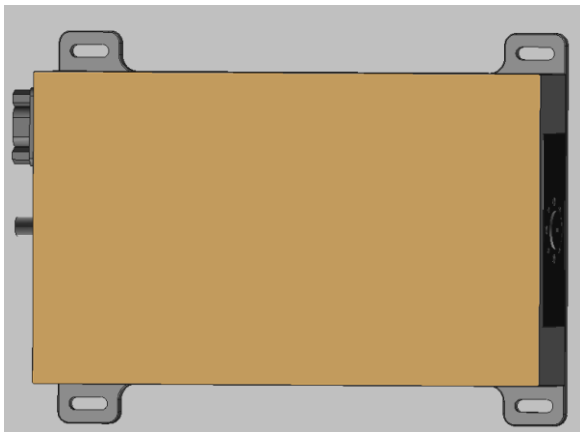

Product Overview

AT-AM6-7588-27 is a E band, active x6 frequency multiplier. The multiplier has an input frequency of 12.5 to 14.3GHz with a typical output +27dBm from 75-88GHz.

The integrated input and output buffers deliver high output power at a low drive level. The multiplier also has a typical harmonic suppression of -20dBc. The input port is SMA female, and the output is a WR-12 waveguide.

Other port configurations are available under different requirement.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Frequency: 75-88GHz
- ✓ Pout: +27dBm typical
- ✓ Input: 13-14.3GHz, +5dBm
- ✓ Low Harmonics

Application

- ✓ E band Communication
- ✓ FOD (Foreigner Objects Debris)
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Input Frequency	13GHz		14.3GHz
Input Power		+5dBm	+10dBm
Output Frequency	75GHz		88GHz
Output Power	+25dBm	+27dBm	
Harmonica Suppression		-20dBc	
Drain Voltage		+5V	+8V
Current Quiescent/A		1.5A	
Current at Psat		2.2A	2.5A
Spec Temp		25C	





AT-AM6-7588-27

Active Multiplier x6, 75-88GHz Pout=+27dBm

Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	WR-12
Case Material	Copper
Finish	Gold Plated
Weight (Without Heatsink)	190g
Size:	See outline

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+9V
RF Input Power	+15dBm
Operating Temperature	0 to 50 C
Storage Temperature	-65 to +150C

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.

