

AT-BTAM6-110140-13

Bench-Top F Band X6 Frequency Extender

F Band (110-140GHz) Active Multiplier X6, Bench-top Test Equipment, WR-08

Product Overview



AT-BTAM6-110140-13 is F band, active x6 frequency multiplier. The multiplier has an input frequency of 18.33-23.33GHz with a typical output +13dBm from 110-140GHz. The input port is SMA female, and the output is a WR-08 waveguide with a standard UG-387-M flange.

Please note that there is no isolator at output Port in default. Isolator can be added by -ISO option with extra insertion loss. More information, please contact with sales@atmicrowave.com

Advantages

- ✓ Frequency: 110-140GHz
- ✓ Pout: +13dBm typical
- ✓ Input: 18.33-23.33GHz, +3dBm
- ✓ Bench-Top Labs Test

Application

- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System
- ✓ RCS Test

Key Features

Parameter	Min	Typical	Max
Input Frequency	18.33GHz		23.33GHz
Input Power	0dBm	+3dBm	+10
Multiplier Factor		X6	
Output Frequency	110GHz		140GHz
Output Power	+10dBm	+13dBm	
Input Return Loss		-10dB	
X7 Harmonic Suppression		-20dBc	
X5 Harmonic Suppression		-8dBc	
Power Supply	90V	110-220V	240V
Temp Spec		25C	




Shanghai AT Microwave Limited

Tel:021-6229 1233 sales@atmicrowave.com

www.atmicrowave.com



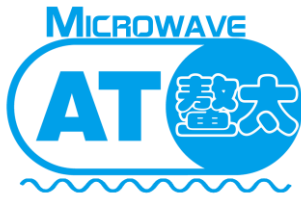

AT-BTAM6-110140-13

Bench-Top F Band X6 Frequency Extender

Mechanical Information:

Parameter	Value
IF Input Port	SMA Female
RF Output Port	WR-08
Power Supply	90V TO 240V AC to DC Power Converter included
DC Bias Switch	ON-OFF switch with light indicator
Weight	2.5KG
Dimension	See outline

Absolute Maximum Ratings Table

Parameter	Value
Drain Supply	+90 to 260V
IF Input Power	+15dBm
Operating Temperature	0 to +50C
Storage Temperature	-65 to +150C

Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.



Shanghai AT Microwave Limited
Tel:021-6229 1233 sales@atmicrowave.com
www.atmicrowave.com







AT-BTAM6-110140-13

Bench-Top F Band X6 Frequency Extender

Test Data:

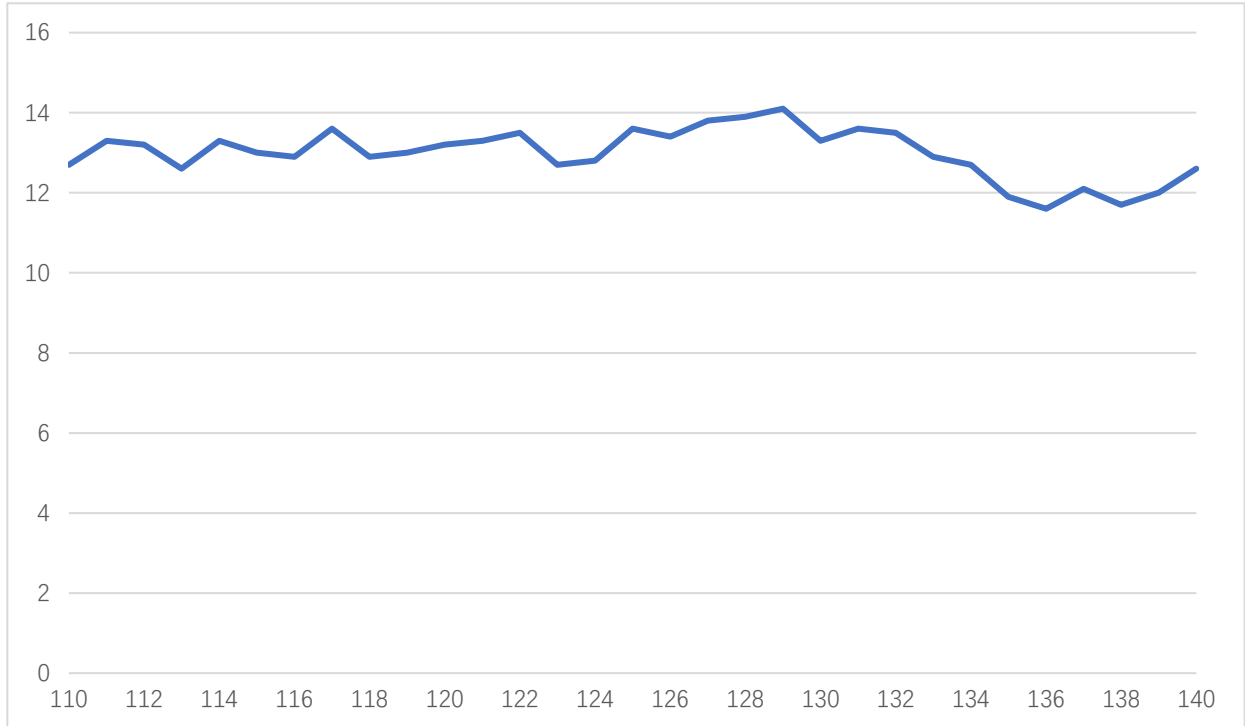

Pout vs Frequency

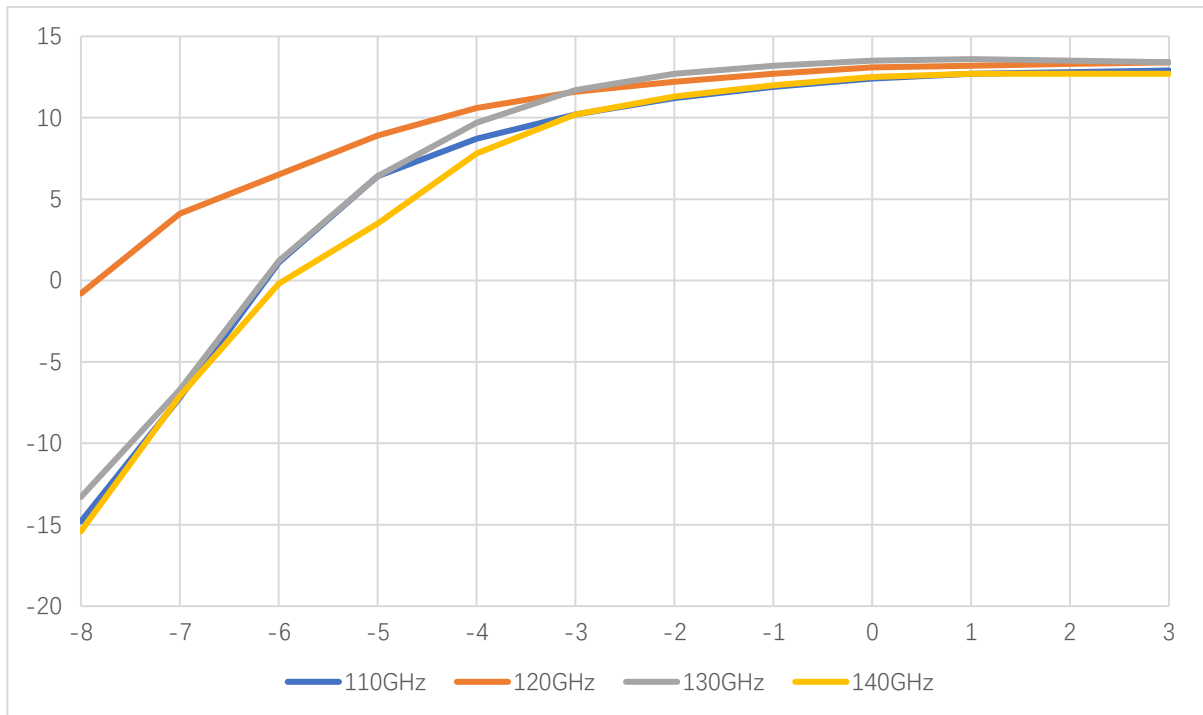


Pout vs Pin




Shanghai AT Microwave Limited
Tel:021-6229 1233 sales@atmicrowave.com
www.atmicrowave.com





AT-BTAM6-110140-13

Bench-Top F Band X6 Frequency Extender

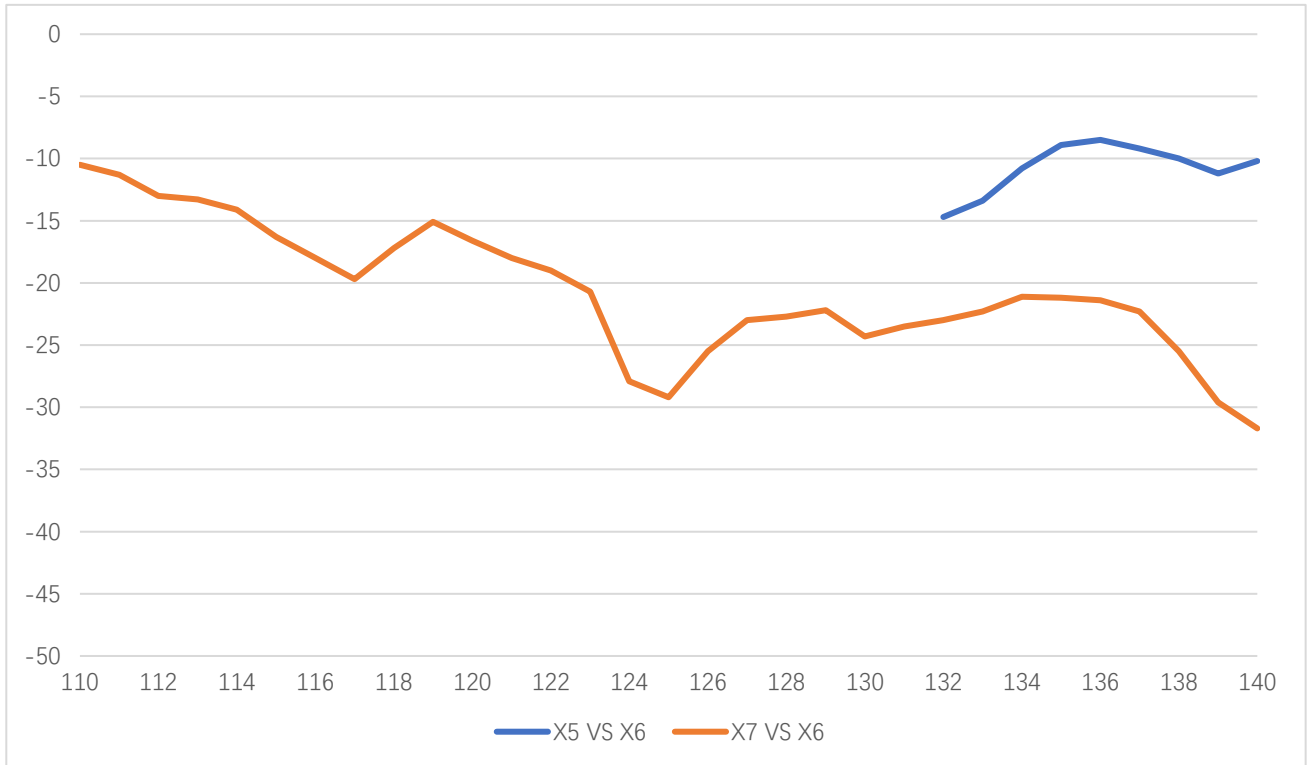

X5/X7 Harmonics vs X6 Pout



Shanghai AT Microwave Limited
Tel:021-6229 1233 sales@atmicrowave.com
www.atmicrowave.com



Dimension(mm)

The bottom of the bench-top product is with four support foot pads in default.
Mounting bracket option is available according to request.

