

AT-HPF-0420HC

2022-3-21

4-20GHz High Pass Filter, SMA Connector



Product Overview

AT Microwave offers high performance coaxial filter from low frequency to 67GHz, including BPF-Band Pass Filter, LPF-Low Pass Filter and HPF-High Pass Filter.

These filters are based on MMIC technology with small size and fast delivery time.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Low Insertion Loss
- ✓ Good Return Loss
- ✓ High Stop Band Suppression
- ✓ Sharp Roll-Off

Application

- ✓ Automotive Radar Test
- ✓ FOD (Foreigner Objects Debris)
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Passband Frequency		4-20GHz	
Passband Insertion Loss		-2.5 dB	-3.5dB
Passband Return Loss	-8dB	-15 dB	
Rejection@ 3.3GHz	-15	-20 dB	
Rejection@ 3.2GHz	-25	-30 dB	
Spec Temp		25C	





AT-HPF-0420HC

Coaxial High Pass Filter

Mechanical Information

Item	Description
RF1 Port	SMA Female
RF2 Port	SMA Male
Case Material	Brass
Finish	Gold Plated
Weight	25g
Size:	See outline

Absolute Maximum Ratings Table

Parameter	Value
RF Power	+30dBm
Operating Temperature	-40 to +85C
Storage Temperature	-65 to +150C

Part Number Selection Guide


Item	Description
Part Number	In Default, Female to Male
Part Number-FF	RF1=Female, RF2=Female
Part Number-MM	RF1=Male, RF2=Male

Test Result

Performance may vary slight from unit to unit.
To be added.



Dimension (mm)

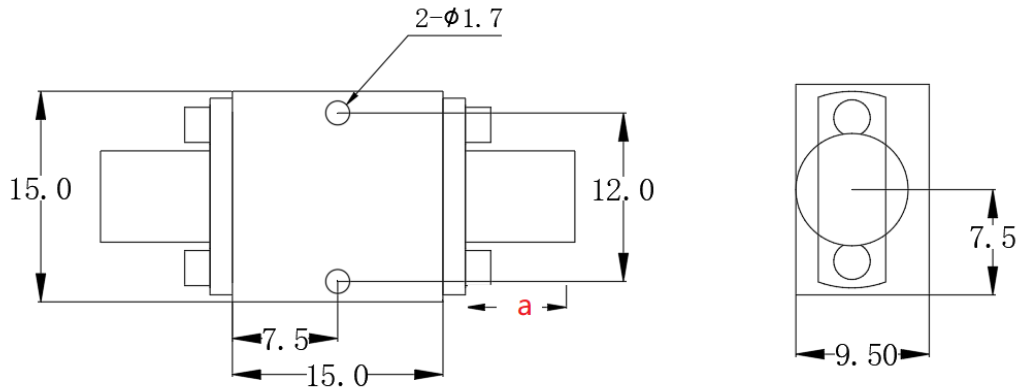

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

