


Turbo-V 1001 Pump and Navigator System

Product description

The Agilent Turbo-V 1001 Navigator Pump offers a pumping speed up to 1,050 L/s in DN 160, 200, and 250 installations. The high compression ratios, high foreline pressure tolerance, and maintenance-free operation make the Turbo-V 1001 a reliable, high-performance pump with a low cost of ownership.

The Turbo-V 1001 offers hydrocarbon-free operation, and is an excellent choice for large UHV systems, nuclear research, ion implanters, surface analysis, electron microscopy, and any application where high pumping speed is required.

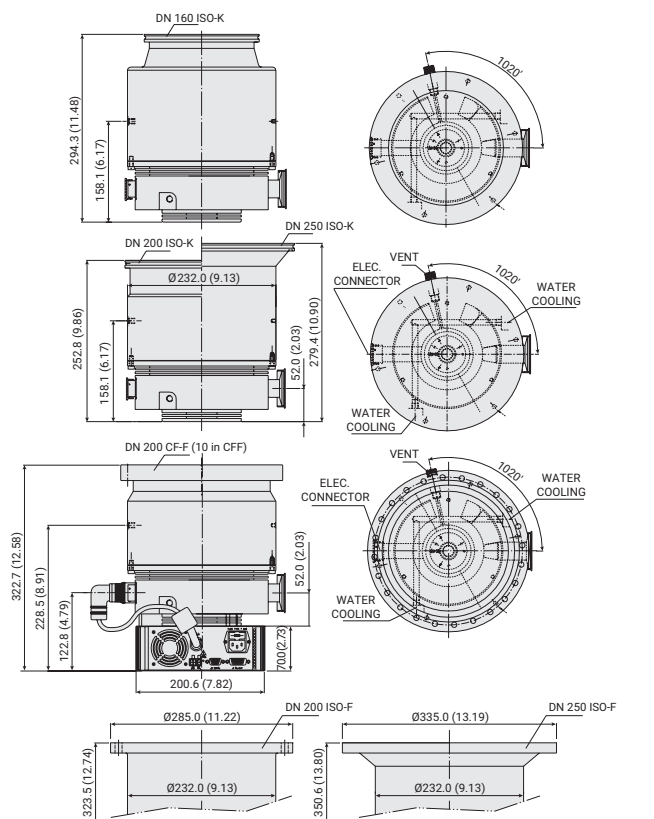

Dimensions: millimeters (inches)



Technical specifications

SEM version available on request

Pumping Speed	DN 160 ISO DN 200 ISO or DN 200 CF-F (10 in CFF) DN 250 ISO	N ₂ : 790 L/s N ₂ : 950 L/s N ₂ : 1,050 L/s	He: 820 L/s He: 870 L/s He: 900 L/s	H ₂ : 860 L/s H ₂ : 900 L/s H ₂ : 920 L/s
Compression Ratio	DN 160 ISO DN 200-250 ISO, DN 200 CF-F (10 in CFF)	N ₂ : 1 × 10 ⁹ N ₂ : 1 × 10 ⁹	He: 1 × 10 ⁷ He: 1 × 10 ⁷	H ₂ : 1 × 10 ⁶ H ₂ : 1 × 10 ⁶
Base Pressure* (with Recommended Forepump)	<1 × 10 ⁻¹⁰ mbar (<1 × 10 ⁻¹⁰ Torr)			
Inlet Flange	DN 160 ISO-K DN 200 ISO-K DN 200 ISO-F DN 200 CF-F (10 in CFF) DN 250 ISO-K DN 250 ISO-F			
Foreline Flange	DN 40 ISO-KF			
Rotational Speed	38,000 rpm			
Start-Up Time	<4 minutes			
Recommended Forepump	Mechanical: Agilent DS 402 Dry scroll: Agilent TS300, IDP-15			
Operating Position	Any			
Cooling Requirements	Forced air or water			
Bakeout Temperature	120 °C at inlet flange max (CF flange) 80 °C at inlet flange max (ISO flange)			
Vibration Level (Displacement)	<0.01 μm at inlet flange			
Weight kg (lb)	DN 160 ISO-K DN 200 ISO-K DN 200 CF-F (10 in CFF) DN 250 ISO-K DN 200 ISO-F, DN 250 ISO-F, DN 200 CF-F (10 in CFF)	19 (41.8) 19.4 (43.0) 25.5 (54.2) 21.2 (46.6) 25.5 (54.2)		
Special Versions Available	SEM			

* According to standard DIN 28 428.

Available with On-board Navigator controller, ½ Rack controller, or PCB controller. For information on controllers, see the Ordering Information table.

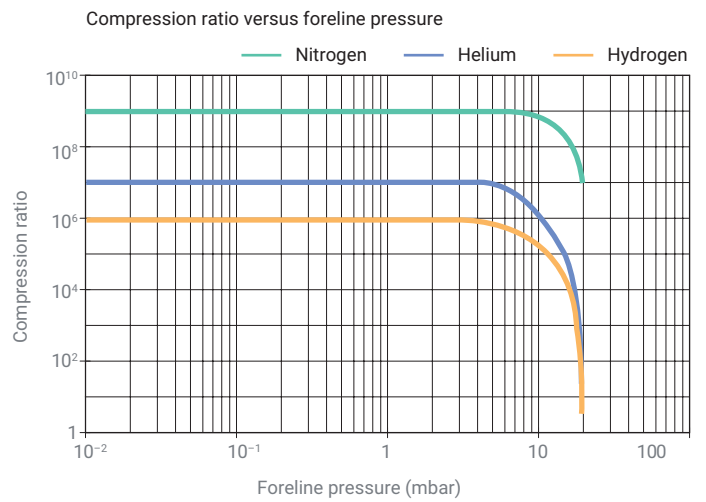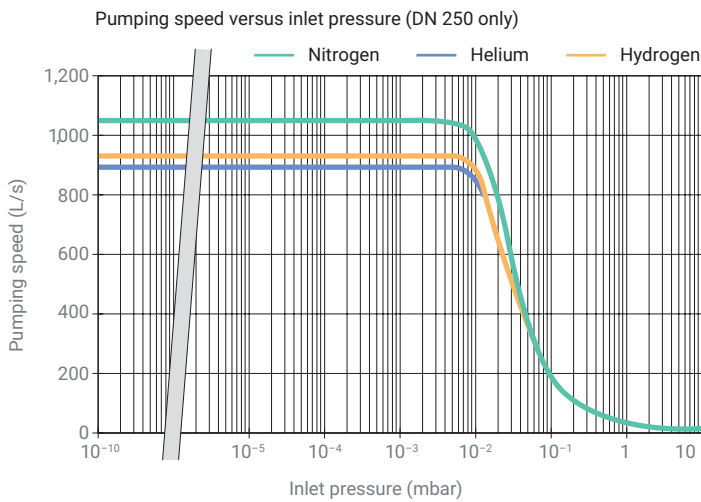

Ordering information

Description	Weight kg (lbs)	Part Number
Complete Systems		
Turbo-V 1001 Navigator Complete System, DN 160 ISO-K Flange	24.4 (53.8)	9698840
Turbo-V 1001 Navigator Complete System, DN 200 ISO-K Flange	24.8 (55.0)	9698838
Turbo-V 1001 Navigator Complete System, DN 200 ISO-F Bolted Flange	30.9 (66.2)	9698844
Turbo-V 1001 Navigator Complete System, DN 200 CFF (10 in CFF)	30.9 (66.2)	9698839
Turbo-V 1001 Navigator Complete System, DN 250 ISO-K	26.6 (58.6)	9698841
Turbo-V 1001 Navigator Complete System, DN 250 ISO-F Bolted Flange	30.9 (66.2)	9698845

Complete system includes: Pump, inlet screen, controller mounted on the bottom, 2 mains cables (NEMA plug and European plug).

Pumps		
Turbo-V 1001 Pump, DN 160 ISO-K Flange	19.0 (41.8)	9698933
Turbo-V 1001 Pump, DN 200 ISO-K Flange	19.4 (43.0)	9698931
Turbo-V 1001 Pump, DN 200 ISO-F Bolted Flange	25.5 (54.2)	9698946
Turbo-V 1001 Pump, DN 160 CF-F (8 in CFF) Flange	25.5 (54.2)	9698932M003
Turbo-V 1001 Pump, DN 200 CF-F (10 in CFF) Flange	25.5 (54.2)	9698932
Turbo-V 1001 Pump, DN 250 ISO-K Flange	21.2 (46.6)	9698934
Turbo-V 1001 Pump, DN 250 ISO-F Bolted Flange	25.5 (54.2)	9698947
Controllers		
Turbo-V 1001 Navigator Controller 120/220 V – 50/60 Hz	5.4 (12.0)	9698978
Turbo-V 1001 Rack Controller, 100 to 240 V	15.7 (35.0)	X3501-64003

Description	Weight kg (lbs)	Part Number
Pump Accessories		
Mains Cable NEMA Plug, 3 m long		9699958
Mains Cable European Plug, 3 m long		9699957
RS232 – Serial Cable		9699883
Inlet Screen DN 160		9699304
Inlet Screen DN 200		9699316
Inlet Screen DN 250		9699350
Metal Water Cooling Kit for 1/4 in or 6 × 8 mm (id × od) Hoses		9699337
Plastic Water Cooling Kit for 4 × 6 mm (id × od) Flexible Hose		9699347
Air Cooling Kit for use with Navigator Controller		9699297
Air Cooling Kit for use with Standard Rack Controller		X3501-68001
Bracket for Navigator Controller Side Mouting		9699298
Vibration Damper DN 160	4.0 (9.0)	9699345
Vibration Damper, DN 200	5.0 (10.0)	9699346
Vibration Damper, DN 200 CF-F (10 in CFF)	5.0 (10.0)	9699336
Vent Flange, DN 10 ISO-KF/M8		9699108
Vent Device with Adjustable Delay Time for Standard Rack Controller		9699831
Vent Valve for Standard Rack Controller		X3501-68002
Vent Valve for Navigator Controller		9699834
Purge Valve 10 SCCM DN 16 ISO-KF – M12		9699239
Purge Valve 10 SCCM ¼ Swagelok – M12		9699240
Purge Valve 20 SCCM DN 16 ISO-KF – M12		9699241
Purge Valve 20 SCCM ¼ Swagelok – M12		9699242
Purge Valve 10 SCCM ¼ Swagelok ¼ Swagelok		9699232
Purge Valve 20 SCCM ¼ Swagelok ¼ Swagelok		9699236

Contact information

Americas

Agilent Technologies
121 Hartwell Avenue,
Lexington, MA 02421 USA
Toll free: +1 800 882 7426
vpl-customer@agilent.com

www.agilent.com/en/product/vacuum-technologies/turbo-pumps-controllers/turbo-pumps/turbo-v-1001-navigator-pump

DE44249.5819212963

This information is subject to change without notice.

© Agilent Technologies, Inc. 2021
Printed in the USA, May 5, 2021
5994-3093EN

Europe, Middle East, Africa, India

Agilent Technologies Italia SpA
Via F.lli Varian 54,
10040 Leini (Torino), Italy
Tel: +39 011 9979 111
Toll free: 00 800 234 234 00
vpt-customer@agilent.com

China

Beijing Office Agilent Technologies
(China) Co. Ltd.
No.3, Wang Jing Bei Lu,
Chao Yang District,
Beijing, 100102, China
Toll free: 800 820 6778
Contacts.vacuum@agilent.com

For more information, please contact your Agilent representative or visit www.agilent.com/chem/vacuum where you can chat live with a vacuum expert.

