


Ceyear

3656A/B/D

Vector Network Analyzer

(100kHz ~ 20 GHz)

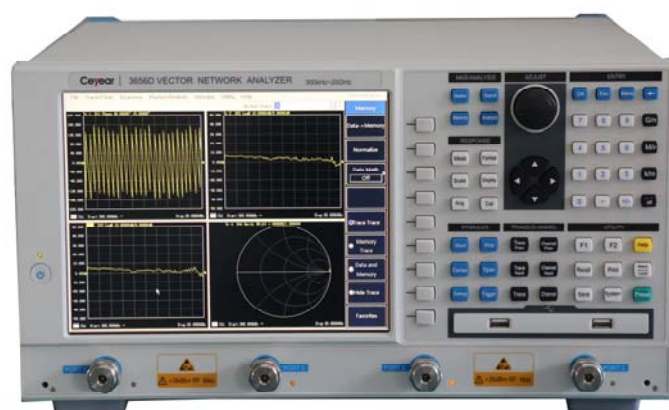

China Electronics Technology Instruments Co., Ltd.

Product Overview

3656A/B/D vector network analyzer is applicable to fields of radio communications, cable TV, teaching and automotive electronics etc. It can be used for performance measurement of RF components such as filter, amplifier, antenna, cable, and cable television sub connectors etc. It adopts Windows operating system, and has functions of error calibration, time domain and fixture simulator; It supports multiple display formats such as logarithmic amplitude, linear amplitude, standing wave, phase, group delay, Smith chart and polar coordinates etc.; It provides multiple calibration types including frequency response, single port, response isolation, enhanced response and full dual-port, rapid SOLT calibration and electrical calibration; It is capable of multi-channel and multi-window display; It is designed with USB interface, LAN interface, GPIB interface and VGA interface. It can rapidly and accurately measure the amplitude, phase and group delay characteristics of the DUT S-parameter, with efficient and powerful error correction capability.

Main Features


- Dynamic range up to 125dB; accurate measurement on high rejection ratio devices
- 75Ω test port impedance option of 3656A for cable TV components measurement
- 3656A/B/D provide 4-port option which can accomplish all 16 S parameters test of 4-port net by a single connection

Note: For 4-port option of 3656A/B, it's external device 2813A

- Ultra-low trace noise which provide higher test accuracy
- Up to 64 independent measuring channels that can implement complex testing schemes rapidly
- Powerful data analysis functions, such as ripple test, bandwidth test and limit test, convenient for user to judge the conformity and improves the test efficiency
- Time domain analysis function as the standard configuration
- Fixture simulator can simulate various R&D situations to rapidly get the real-time test results
- LAN and GPIB interface, capable of remote control and system interconnection, 4 USB interfaces


Wide dynamic range

With dynamic range up to 125dB (IFBW=10Hz), 3656A/B/D is capable of accurate measurement on devices with high rejection ratio.

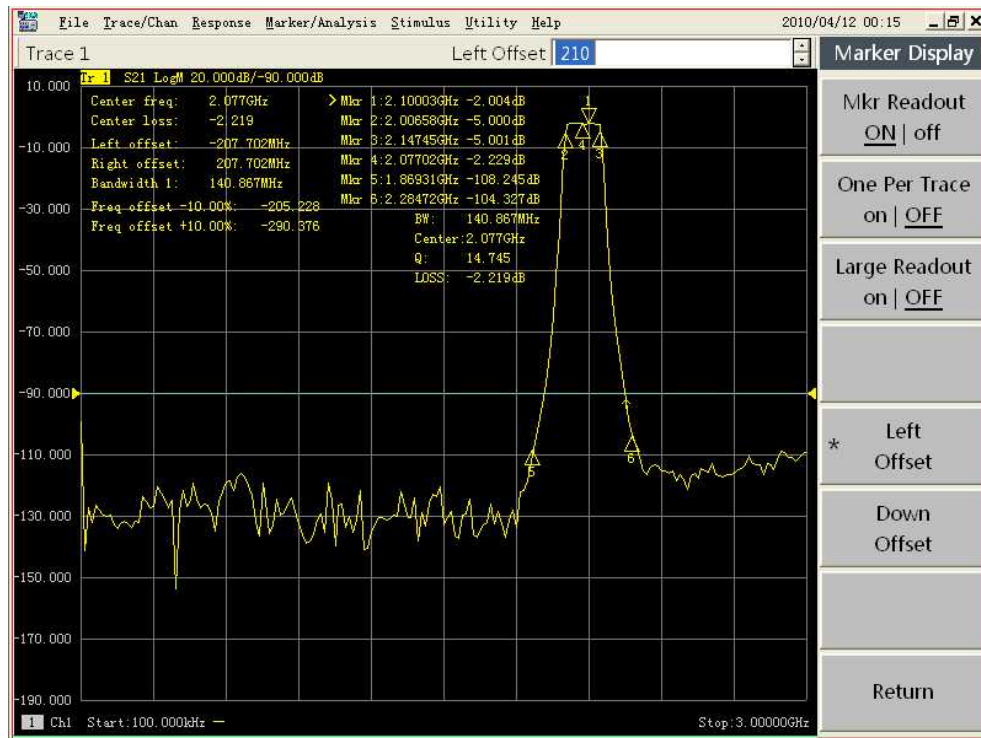


Ultra -low trace noise

Trace noise of 3656A/B/D is ultra-low, which minimizes measurement error.

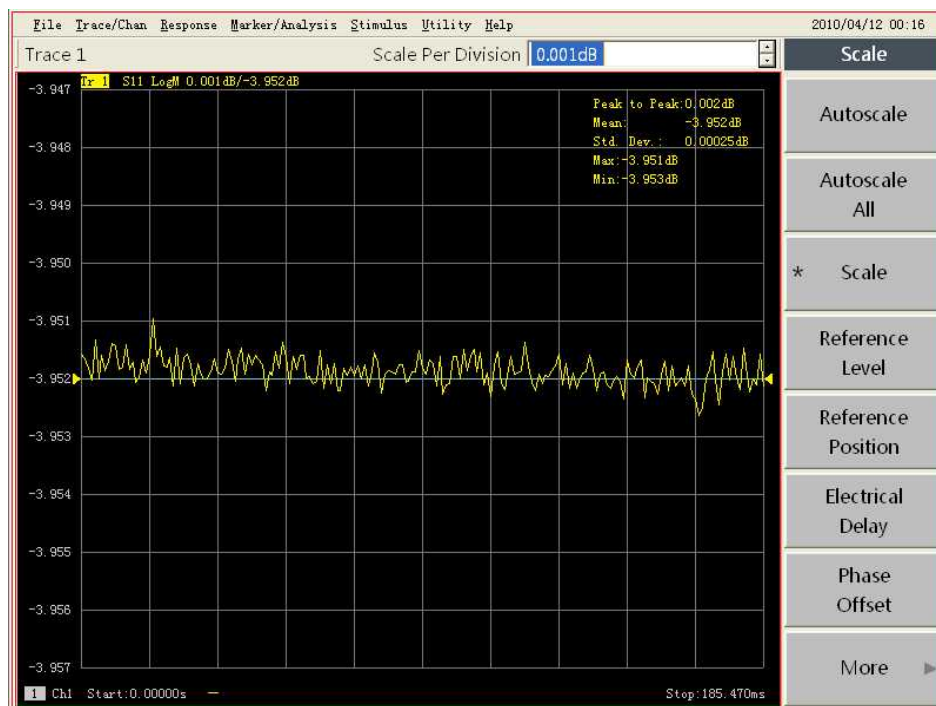


Time-domain analysis function

The analyzer can conduct time-domain measurement on DUT via time-domain software so as to comprehensively test the performance indicators of DUT, such as cable fault location and length measurement.

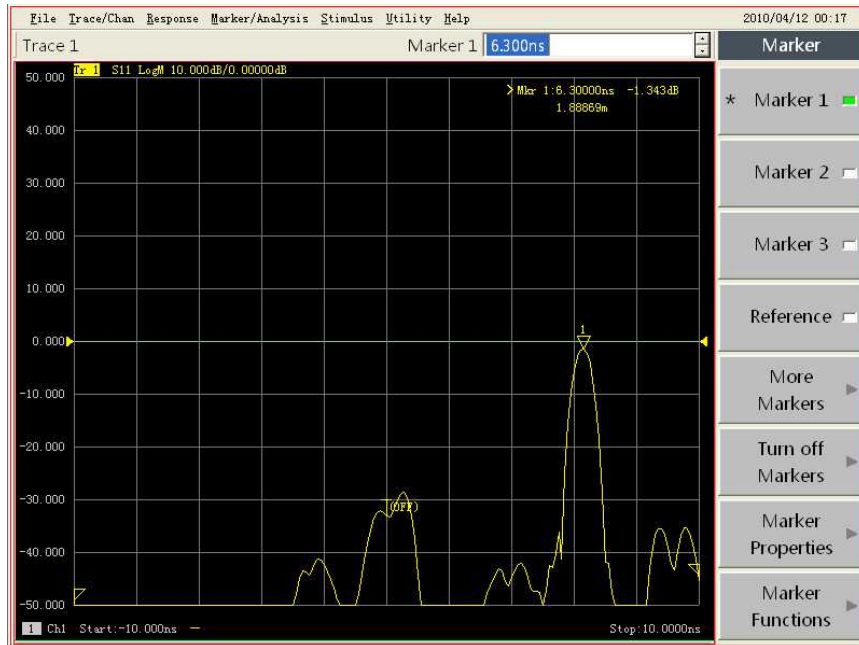

Powerful data analysis function

It has analysis functions such as limit test, ripple test and bandwidth test, filter automatic statistics etc., which can clearly test the loss, ripple and rejection and help for conduct hopping filter debugging.

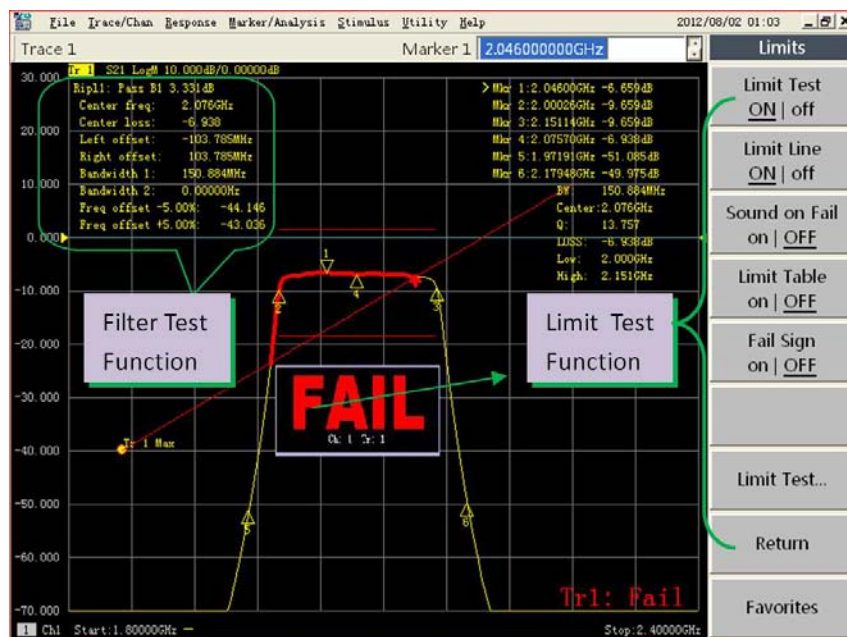

Typical Applications

Production test of mobile communication products

The frequency range of 3656A/B/D vector network analyzer can meet the demand of production test on mobile communication products. It has advantages of high sweep speed, wide dynamic range and compact size which is very suitable for the test of mass production in factories.


3656A/B/D can be applied to the test of RF components such as filter, amplifier, antenna and cables. The 75Ω test assembly of 3656A is also available for performance test of CATV devices.



Test of passive multi-port device and balanced device

3656A/B/D VNA provide 4-port test function . It can test the whole 16 S parameters of 4-port network via one single connection, thus is very suitable for the mass production test of multi-port devices in factories. It has balanced parameter test function: after the full 3-port or full 4-port calibration using 3 or 4 test ports, choose the corresponding operation mode (single port-balanced network, single port-single port-balanced network, balanced-balanced network), then you can gain the mixed S-parameters of balanced devices.

Notes: For 4-port option of 3656A/B, it's external device 2813A

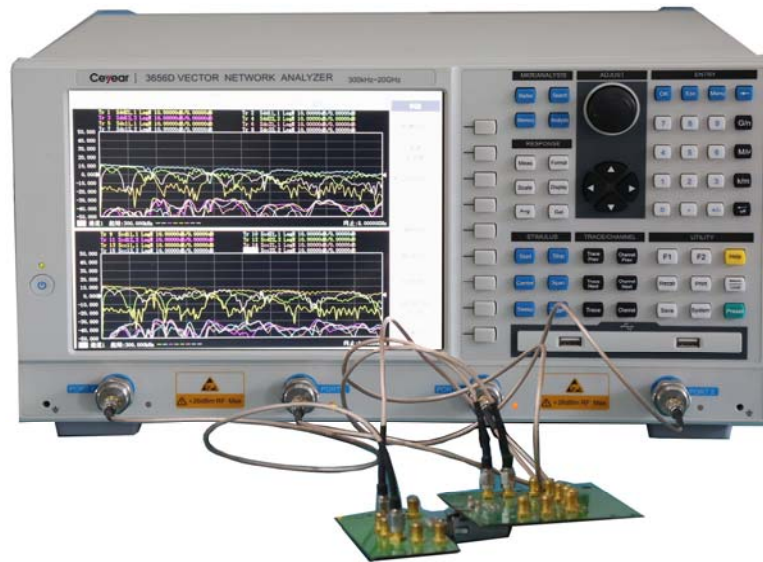

3656A/B Technical Specifications:

Parameters	3656A	3656B																																								
Frequency range	100kHz ~ 3GHz	100kHz ~ 8.5GHz																																								
Frequency resolution	1Hz	1Hz																																								
Frequency accuracy	$\pm 5 \times 10^{-6} (23^{\circ}\text{C} \pm 3^{\circ}\text{C})$	$\pm 5 \times 10^{-6} (23^{\circ}\text{C} \pm 3^{\circ}\text{C})$																																								
Output power setting range	-45dBm ~ +10dBm	-55dBm ~ +10dBm																																								
System dynamic range	<table border="0" style="width: 100%;"> <tr> <td></td> <td>(10Hz)</td> <td>(3kHz)</td> <td></td> </tr> <tr> <td>100kHz ~ 1MHz</td> <td>90dB</td> <td>60dB</td> <td></td> </tr> <tr> <td>1MHz ~ 10MHz</td> <td>110 dB</td> <td>80 dB</td> <td></td> </tr> <tr> <td>10MHz ~ 3GHz</td> <td>125dB</td> <td>95dB</td> <td></td> </tr> </table>		(10Hz)	(3kHz)		100kHz ~ 1MHz	90dB	60dB		1MHz ~ 10MHz	110 dB	80 dB		10MHz ~ 3GHz	125dB	95dB		<table border="0" style="width: 100%;"> <tr> <td></td> <td>(10Hz)</td> <td>(3kHz)</td> <td></td> </tr> <tr> <td>100kHz ~ 20MHz</td> <td>110dB</td> <td>80dB</td> <td></td> </tr> <tr> <td>20MHz ~ 3GHz</td> <td>125 dB</td> <td>95 dB</td> <td></td> </tr> <tr> <td>3GHz ~ 6GHz</td> <td>123dB</td> <td>93dB</td> <td></td> </tr> <tr> <td>6GHz ~ 8.5GHz</td> <td></td> <td>118dB</td> <td></td> </tr> <tr> <td></td> <td>88dB</td> <td></td> <td></td> </tr> </table>		(10Hz)	(3kHz)		100kHz ~ 20MHz	110dB	80dB		20MHz ~ 3GHz	125 dB	95 dB		3GHz ~ 6GHz	123dB	93dB		6GHz ~ 8.5GHz		118dB			88dB		
	(10Hz)	(3kHz)																																								
100kHz ~ 1MHz	90dB	60dB																																								
1MHz ~ 10MHz	110 dB	80 dB																																								
10MHz ~ 3GHz	125dB	95dB																																								
	(10Hz)	(3kHz)																																								
100kHz ~ 20MHz	110dB	80dB																																								
20MHz ~ 3GHz	125 dB	95 dB																																								
3GHz ~ 6GHz	123dB	93dB																																								
6GHz ~ 8.5GHz		118dB																																								
	88dB																																									
Reflection track	<table border="0" style="width: 100%;"> <tr> <td>100kHz ~ 10MHz</td> <td>$\pm 0.030\text{dB}$</td> </tr> <tr> <td>10MHz ~ 3GHz</td> <td>$\pm 0.020\text{dB}$</td> </tr> </table>	100kHz ~ 10MHz	$\pm 0.030\text{dB}$	10MHz ~ 3GHz	$\pm 0.020\text{dB}$	<table border="0" style="width: 100%;"> <tr> <td>100kHz ~ 3GHz</td> <td>$\pm 0.030\text{dB}$</td> </tr> <tr> <td>3GHz ~ 6GHz</td> <td>$\pm 0.040\text{dB}$</td> </tr> <tr> <td>6GHz ~ 8.5GHz</td> <td>$\pm 0.050\text{dB}$</td> </tr> </table>	100kHz ~ 3GHz	$\pm 0.030\text{dB}$	3GHz ~ 6GHz	$\pm 0.040\text{dB}$	6GHz ~ 8.5GHz	$\pm 0.050\text{dB}$																														
100kHz ~ 10MHz	$\pm 0.030\text{dB}$																																									
10MHz ~ 3GHz	$\pm 0.020\text{dB}$																																									
100kHz ~ 3GHz	$\pm 0.030\text{dB}$																																									
3GHz ~ 6GHz	$\pm 0.040\text{dB}$																																									
6GHz ~ 8.5GHz	$\pm 0.050\text{dB}$																																									
Transmission track	<table border="0" style="width: 100%;"> <tr> <td>100kHz ~ 10MHz</td> <td>$\pm 0.030\text{dB}$</td> </tr> <tr> <td>10MHz ~ 3GHz</td> <td>$\pm 0.020\text{dB}$</td> </tr> </table>	100kHz ~ 10MHz	$\pm 0.030\text{dB}$	10MHz ~ 3GHz	$\pm 0.020\text{dB}$	<table border="0" style="width: 100%;"> <tr> <td>100kHz ~ 3GHz</td> <td>$\pm 0.030\text{dB}$</td> </tr> <tr> <td>3GHz ~ 6GHz</td> <td>$\pm 0.040\text{dB}$</td> </tr> <tr> <td>6GHz ~ 8.5GHz</td> <td>$\pm 0.050\text{dB}$</td> </tr> </table>	100kHz ~ 3GHz	$\pm 0.030\text{dB}$	3GHz ~ 6GHz	$\pm 0.040\text{dB}$	6GHz ~ 8.5GHz	$\pm 0.050\text{dB}$																														
100kHz ~ 10MHz	$\pm 0.030\text{dB}$																																									
10MHz ~ 3GHz	$\pm 0.020\text{dB}$																																									
100kHz ~ 3GHz	$\pm 0.030\text{dB}$																																									
3GHz ~ 6GHz	$\pm 0.040\text{dB}$																																									
6GHz ~ 8.5GHz	$\pm 0.050\text{dB}$																																									
Effective directivity	<table border="0" style="width: 100%;"> <tr> <td>100kHz ~ 10MHz</td> <td>49 dB</td> </tr> <tr> <td>10MHz ~ 3GHz</td> <td>46 dB</td> </tr> <tr> <td>100kHz ~ 10MHz</td> <td>49dB (option H01)</td> </tr> <tr> <td>10MHz ~ 3GHz</td> <td>46dB (option H01)</td> </tr> </table>	100kHz ~ 10MHz	49 dB	10MHz ~ 3GHz	46 dB	100kHz ~ 10MHz	49dB (option H01)	10MHz ~ 3GHz	46dB (option H01)	<table border="0" style="width: 100%;"> <tr> <td>100kHz ~ 3GHz</td> <td>46dB</td> </tr> <tr> <td>3GHz ~ 6GHz</td> <td>40dB</td> </tr> <tr> <td>6GHz ~ 8.5GHz</td> <td>38dB</td> </tr> </table>	100kHz ~ 3GHz	46dB	3GHz ~ 6GHz	40dB	6GHz ~ 8.5GHz	38dB																										
100kHz ~ 10MHz	49 dB																																									
10MHz ~ 3GHz	46 dB																																									
100kHz ~ 10MHz	49dB (option H01)																																									
10MHz ~ 3GHz	46dB (option H01)																																									
100kHz ~ 3GHz	46dB																																									
3GHz ~ 6GHz	40dB																																									
6GHz ~ 8.5GHz	38dB																																									
Effective source	<table border="0" style="width: 100%;"> <tr> <td>100kHz ~ 10MHz</td> <td>44dB</td> </tr> </table>	100kHz ~ 10MHz	44dB	<table border="0" style="width: 100%;"> <tr> <td>100kHz ~ 3GHz</td> <td>36dB</td> </tr> </table>	100kHz ~ 3GHz	36dB																																				
100kHz ~ 10MHz	44dB																																									
100kHz ~ 3GHz	36dB																																									

match	10MHz~3GHz	40dB	3GHz~6GHz	35dB
	100kHz~10MHz	43dB (option H01)	6GHz~8.5GHz	33dB
	10MHz~3GHz	21dB (option H01)		
Effective load match	100kHz~10MHz	49 dB	100kHz~3GHz	44dB
	10MHz~3GHz	46 dB	3GHz~6GHz	40dB
	100kHz~10MHz	48dB (option H01)	6GHz~8.5GHz	36dB
	10MHz~3GHz	41dB (option H01)		
Test points	1 to 16001			
IF bandwidth	Min. 1Hz; Max. 5MHz, in 1, 2, 3, 5, 7 step			
Port connector type	Type-N (female) 50 ohm system impedance Type-N (female) 75 ohm system impedance (3656-H01)			
Number of test ports	2			
Number of test receivers	4			
Reference level amplitude setting	Setting range: ± 500 dB Setting resolution: 0.001dB			
Reference phase setting	Setting range: $\pm 500^\circ$ Setting resolution: 0.01 $^\circ$			
Time-base reference output	Output frequency: 10MHz Output level: +10dBm \pm 4dB			
Digital interface	GPIB, USB, Ethernet interface and VGA display interface			
Operation system	Windows XP			
Display	10.4-inch high brightness LCD			
Test domain	Frequency domain, Time domain			
Dimensions	435 \times 233 \times 348 (W \times H \times D) (including foot pad, foot, lateral stripping, input and output port)			
Power consumption	150W			
Power supply	50Hz single phase 220V or 50Hz/60Hz single phase 110V AC			
Weight	16kg			

3656D Technical Specifications:

Parameters	3656D		
Frequency range	300kHz ~ 20GHz		
Frequency resolution	1Hz		
Frequency accuracy	$\pm 1 \times 10^{-6} (23^{\circ}\text{C} \pm 3^{\circ}\text{C})$		
System dynamic range IF bandwidth: 10Hz	Frequency range	2-port	4-port
	300kHz~100MHz	95dB	90 dB
	100MHz~1GHz	110dB	100 dB
	1GHz~6GHz	120dB	115 dB
	6GHz~8GHz	117dB	110 dB
	8GHz~10GHz	115dB	105 dB
	10GHz~15GHz	110dB	100 dB
	15GHz~20GHz	100dB	90 dB
Reflection track	300kHz~10MHz	$\pm 0.030\text{dB}$	
	10MHz~3GHz	$\pm 0.040\text{dB}$	
	3GHz~20GHz	$\pm 0.050\text{dB}$	
Transmission track	300kHz~10MHz	$\pm 0.030\text{dB}$	
	10MHz~3GHz	$\pm 0.040\text{dB}$	
	3GHz~6GHz	$\pm 0.100\text{dB}$	
	6GHz~20GHz	$\pm 0.150\text{dB}$	
Effective directivity	300kHz~10MHz	46dB	
	10MHz~3GHz	42dB	
	3GHz~6GHz	38dB	
	6GHz~20GHz	36dB	
Effective source match	300kHz~10MHz	37dB	
	10MHz~3GHz	37dB	
	3GHz~6GHz	31dB	
	6GHz~20GHz	28dB	
Effective load match	300kHz~10MHz	44dB	
	10MHz~3GHz	42dB	
	3GHz~6GHz	38dB	
	6GHz~20GHz	36dB	
Test points	1 to 16001		
IF bandwidth	Min. 1Hz; Max. 5MHz, in 1, 2, 3, 5, 7 step		
Port connector type	3.5mm (male) 50 ohm system impedance		
Number of test ports	2/4		
Number of test receivers	2/4		

Reference level amplitude setting	Setting range: $\pm 500\text{dB}$ Setting resolution: 0.001dB
Reference phase setting	Setting range: $\pm 500^\circ$ Setting resolution: 0.01°
Time-base reference output	Output frequency: 10MHz Output level: +10dBm \pm 4dB
Digital interface	GPIB, USB, Ethernet interface and VGA display interface
Operation system	Windows XP
Display	10.4-inch high brightness LCD
Test domain	Frequency domain, Time domain
Dimensions	436×236.5×410 (W×H×D) (including foot pad, foot, lateral stripping, input and output port)
Power consumption	150W
Power supply	50Hz single phase 220V or 50Hz/60Hz single phase 110V AC
Weight	18kg

3656A Ordering Information:

- Main Unit: 3656A Vector Network Analyzer
- Standard Configuration/Option Information

	No.	Standard Configuration/Option
Standard Configuration	---	Power cord ,1 piece
	---	USB mouse, 1 piece
	---	Quick start guide, 1 piece
	---	Certificate of conformity , 1 piece
	---	CD, 1 piece
Option	3656-H01	75Ω port impedance system Notes: After choosing this option, the main unit will not has 50Ω port impedance system
	3656-H02	Type-N testing cable (GORE-OSZKUZKU0240, dual male, 60cm)
	3656-H03	Type-N testing cable (GORE-OSZKUZKV0240, female male, 60cm)
	3656-H04	English options (Button, front panel, label) Notes: After choosing this option, the main unit will not has Chinese button,front panel,label
	3656-H05	20205 Type-N calibration kit (DC~3GHz)
	3656-H06	20204 Type-N 75Ω calibration kit
	3656-H07	Economical stable phase testing cable CETC41-N/J.SMA/J.197C-800(N to 3.5mm connector, dual male, 80cm)

	3656-H08	Economical stable phase testing cable CETC41-N/J.N/K.197C-800(N type connector, female-male, 80cm)
	3656-H09	Economical stable phase testing cable CETC41-N/J.N/J.197C-800(N type connector, dual male, 80cm)
	3656-H10	75Ω testing cable 24-0800-51M1-51M1
	3656-H11	20402 Electronic calibration kit (300kHz~18GHz, Type-N (female-male), 2-port)
	3656-H12	20403 Electronic calibration kit (10MHz~26.5GHz, 3.5mm (female-male), 2-port)
	3656-H13	20405 Electronic calibration kit (10MHz~20GHz, 3.5mm (female), 4-port)
	3656-H14	3656 series user manual in Chinese
	3656-H15	3656 series user manual in English
	3656-H16	Aluminum alloy transportation case
	3656-H17	Front panel jumper (Supports 4-port extension and receiver through test)
	3656-H18	2813A 4-port test equipment (Need option 3656A-H17)
	3656-H19	Cabinet, easy to build system

3656B Ordering Information

●Main Unit: 3656B Vector Network Analyzer

●Standard Configuration/Option Information

	No.	Standard Configuration/Option
Standard Configuration	---	Power cord ,1 piece
	---	USB mouse, 1 piece
	---	Quick start guide, 1 piece
	---	Certificate of conformity , 1 piece
	---	CD, 1 piece
Option	3656-H02	Type-N testing cable (GORE-OSZKU0240, dual male, 60cm)
	3656-H03	Type-N testing cable (GORE-OSZKUV0240, female-male, 60cm)
	3656-H07	Economical stable phase testing cable CETC41-N/J.SMA/J.197C-800(Type-N to 3.5mm connector, dual male, 80cm)
	3656-H08	Economical stable phase testing cable CETC41-N/J.N/K.197C-800(Type-N connector, female-male, 80cm)
	3656-H09	Economical stable phase testing cable CETC41-N/J.N/J.197C-800(Type-N connector, dual male, 80cm)
	3656-H11	20402 Electronic calibration kits (300kHz~18GHz, Type-N (female-male), 2 port)
	3656-H12	20403 Electronic calibration kits (10MHz~26.5GHz, 3.5mm (female-male), 2 port)
	3656-H13	20405 Electronic calibration kits (10MHz~20GHz, 3.5mm (female), 4 port)
	3656-H14	3656 series user manual in Chinese
	3656-H15	3656 series user manual in English
	3656-H16	Aluminum transportation case

	3656-H18	2813A 4-port test equipment (Need option 3656B-H29)
	3656-H19	Cabinet, Easy to build system
	3656-H20	English options (Button, front panel, label) Notes: After choosing this option, the main unit will not has Chinese button, front panel, label
	3656-H21	20201 Type-N calibration kit (DC~9GHz)
	3656-H22	20202 3.5mm calibration kit (DC~9GHz)
	3656-H23	32111 waveguide calibration kit (1.72~2.61GHz)
	3656-H24	32112 waveguide calibration kit (2.60~3.95GHz)
	3656-H25	32113 waveguide calibration kit (3.94~6.00GHz)
	3656-H26	32114 waveguide calibration kit (4.64~7.05GHz)
	3656-H27	32115 waveguide calibration kit (5.88~8.17GHz)
	3656-H28	32116 waveguide calibration kit (7.00~10.0GHz)
	3656-H29	Front panel jumper (Supports 4-port extension and receiver through test)

3656D Ordering Information

- Main Unit: 3656D Vector Network Analyzer
- Standard Configuration/Option Information

	No.	Standard Configuration/Option
Standard Configuration	---	Power cord ,1 piece
	---	USB mouse, 1 piece
	---	Quick start guide, 1 piece
	---	Certificate of conformity , 1 piece
	---	CD, 1 piece
Option	3656-H12	20403 Electronic calibration kits
	3656-H13	20405 Electronic calibration kits
	3656-H14	3656 series user manual in Chinese
	3656-H15	3656 series user manual in English
	3656-H19	Cabinet
	3656-H30	31121 3.5mm calibration kits
	3656-H31	87308 3.5NMD/3.5mm-KJ testing cable
	3656-H32	87308A 3.5NMD/3.5mm-KK testing cable
	3656-H33	FB0HA0HB025.0 3.5mm GORE testing cable
	3656-H34	FB0HA0HC025.0 3.5mm GORE testing cable
	3656-H35	2-port English option
	3656-H36	4-port option
	3656-H37	4-port English option
	3656-H38	Aluminum transportation case

2813A Technical Specifications

Parameters	2813A
Frequency range	100kHz ~ 8.5GHz
Stimulus channel flatness	±2.50dB
The initial port directivity	100kHz~10MHz 10dB 10MHz~3GHz 15dB 3GHz~6GHz 13dB 6GHz~8.5GHz 12dB
Port VSWR	2.0
Port isolation	100kHz~20MHz 105dB 20MHz~8.5GHz 115dB
Port connector type	Type-N (female) 50 ohm system impedance
Number of test ports	4
Dimensions (2831A)	435mm*102mm*364mm(W×H×D) (including foot pad, foot, lateral stripping, input and output port)
Power consumption (2831A)	15W
Power input (2813A)	50Hz single phase 220V or 50Hz/60Hz single phase 11V AC
Weight (2813A)	8.0kg

2813A +3656A/B Ordering Information

●Main Unit: 2813A S Parameter Test Equipment

3656A/B Vector Network Analyzer H18 Option

●Standard Configuration/Option Information

	No.	Standard Configuration/Option
Standard Configuration	---	Power cord ,1 piece
	---	USB mouse, 1 piece
	---	Semi-rigid cable , 6 pieces (2 pieces with Type-N connector, 4 pieces with 3.5mm connector)
	---	3.5mm torque wrench, 1 piece
	---	2813A Quick start guide, 1 piece
	---	Certificate of conformity, 1 piece

	---	CD, 1 piece
General Options	2813A-H01	Type-N testing cable (GORE-OSZKUZKU0240, dual male, 60cm)
	2813A-H02	Type-N testing cable (GORE-OSZKUZKV0240, female-male, 60cm)
	2813A-H03	2813A user manual in Chinese
3656A 4-port options	2813A-H04	20205 Type-N calibration kit (DC~3GHz)
3656B 4-port options	2813A-H05	20201 Type-N calibration kit (DC~9GHz)
	2813A-H06	20202 3.5mm calibration kit (DC~9GHz)

Ceyear

Focus on Measurement
Explore the Future

CHINA ELECTRONICS TECHNOLOGY INSTRUMENTS CO., LTD

Tel: +86 532 86896691

Email: sales@ceyear.com

<http://www.ceyear.com>