

QPA-60000-67000-30-27

60~67GHz, 30dB, 27dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	60~67GHz
Gain:	30dB typ.
Gain Flatness:	±2dB typ.
Output Power (Psat):	30dBm typ.
Output Power (P1dB):	27dBm typ.
Spurious:	-60dBc max.
VSWR:	2.0 typ.
Voltage:	+4.5V DC
Current:	3A typ.
Input Power:	+10dBm max.

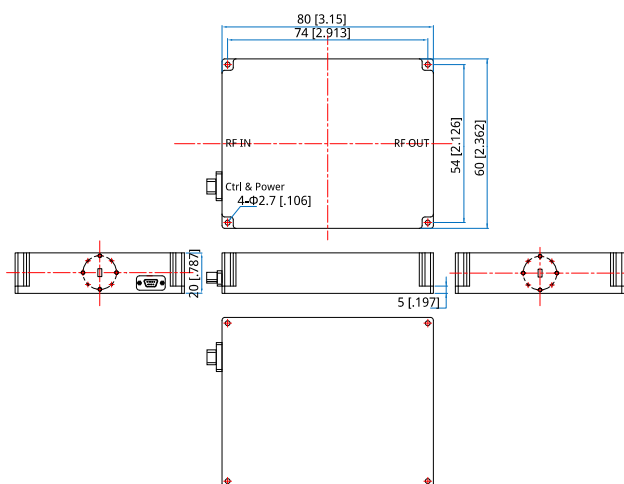
Mechanical

Size*1:	80*60*20mm 3.15*2.362*0.787in
RF Connectors:	WR15
Power Supply & Control Interface:	J30J-9ZK
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+70°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Pin Numbering

Pin	Function	Pin	Function
1, 2, 3, 4, 5	+4.5V	6, 7, 8, 9	GND

How To Order

QPA-60000-67000-30-27

Customization is available upon request.