

2-Way Power Divider/Combiner

QPD2-100-4000-30-S 2-Way, 0.1~4GHz

Features: * Small Size * Low Insertion Loss

- Applications:
- * Amplifiers
- * Mixers
- * Antennas * Laboratory Test

^ Laboratory

Electrical

Frequency:	0.1~4GHz
Insertion Loss:	2dB max.
Input VSWR:	1.4 max. @100~140MHz
	1.2 max. @140~400MHz
Output VSWR:	1.2 max.
Isolation:	16dB min. @100~140MHz
	20dB min. @140~4000MHz
Amplitude Balance:	0.3dB max.
Phase Balance:	±3°
Impedance:	50Ω
Average Power:	30W max.
	2W max. as combiner

Mechanical


Size ^{*1} :	120*40*12mm
	4.724*1.575*0.472in
Weight:	180g
Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -45~+85°C

Outline Drawings

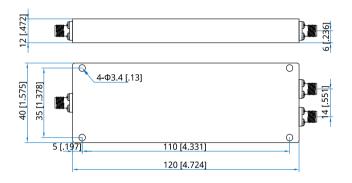

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

How To Order QPD2-100-4000-30-S

Customization is available upon request.