

## QSDC-2000-8000-50-6-S

2~8GHz, 50W, 6dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	2~8GHz
Insertion Loss:	0.2dB max.
Coupling:	6±1.0dB
Directivity:	18dB min.
VSWR:	1.3 max.
Impedance:	50Ω
Average Power:	50W

### Mechanical

Size*1:	43*15*11mm 1.693*0.591*0.433in
Connectors:	SMA Female
Mounting:	3-Φ2.2mm through-hole 4-M2, depth 6mm

[1] Exclude connectors and terminations.

### Outline Drawings

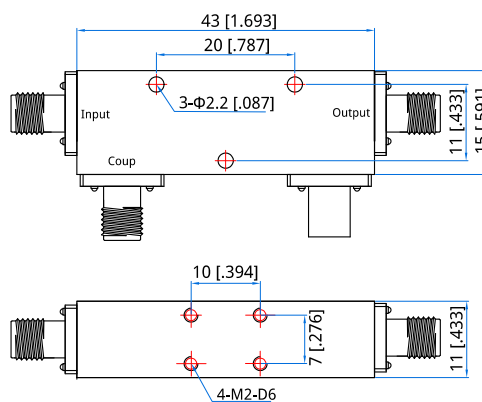

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QSDC-2000-8000-50-6-S**

Customization is available upon request.