

QWCA-62-N

WR-62 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 11.9~18GHz
VSWR: 1.2 max.

Mechanical

Coax Connectors: N
Waveguide Size: WR-62
Flange: FBP140
Material: Aluminium

How To Order

QWCA-62-X-Y-Z

X: Connector type.

Y: Configuration type.

Z: Flange type if applicable

Connector naming rules:

N - N Male (Outline A)

NF - N Female (Outline A)

Configuration naming rules:

E - End launch

R - Right angle (Outline A)

Flange naming rules:

1 - FBP (Outline A)

2 - FDP

3 - FBM



4 - FDM

Examples:

To order a waveguide to coax adapter, WR-62 to N female, right angle, FBP, specify QWCA-62-NF-R-1.

Customization is available upon request.

Outline Drawings

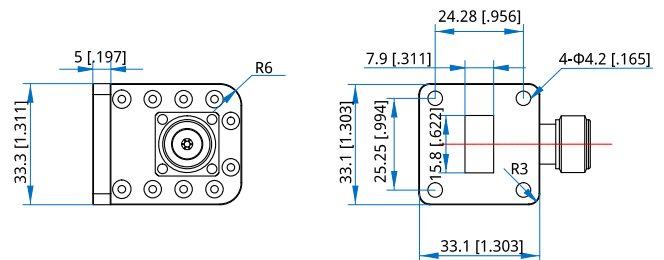

Outline A

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]