

## 20-1000MHz/80Watt/Module

Model Number: KB00210M49A

The model KB00210M49A is a high power amplifier operating between 20MHz and 1000MHz and offering a wide dynamic range with 80 watts typical saturated power. The employment of LDMOS and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

**FEATURES:**

- Small Size and light weight
- Instantaneous ultra broadband
- 50 Ohms input and Output matched
- Built-in control and protection circuits

**ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω**

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	20		1000	MHz
RF Output Power	P <sub>out</sub>	60	80		Watt
Power Gain	G <sub>p</sub>		49		dB
Power Gain Flatness	Δ G <sub>p</sub>		±2		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Harmonics @50W	H		-10		dBc
Spurious Signals	Spur		-55		dBc
In/Output Impedance			50		Ω
Operating Voltage	V <sub>DC</sub>	24	28	32	Volt
DC Current @80W	I <sub>DD</sub>		11	12.5	Amp
Efficiency @80W	η		30		%

**MECHANICAL SPECIFICATIONS**

Parameter	Value	Units	Limits
Dimensions	150x90x25 [5.9x3.5x1]	mm [inch]	Maximum
Weight	1.2 [2.6]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink (Not Supplied)		

**ENVIRONMENTAL CHARACTERISTICS (Design to Meet)**

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

**Absolute Maximum Rating**

Input RF drive level without damage	+10 dBm	Maximum
Load VSWR @ P <sub>OUT</sub> =30W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous	
Thermal Overload	85°C ±5°C shutdown	Maximum

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: [sales@keylinkmw.com](mailto:sales@keylinkmw.com)

>> [www.keylinkmw.com](http://www.keylinkmw.com)

*Specifications subject to change without notice*


20-1000MHz/80Watt/Module

Model Number: KB00210M49A


DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
3	CURRENT SENSE	Analog voltage relative to I <sub>DD</sub> @ 100mV per Ampere
4,5,9	VDD	28V <sub>DC</sub>
6,7,8	GND	Ground

Functional Diagram

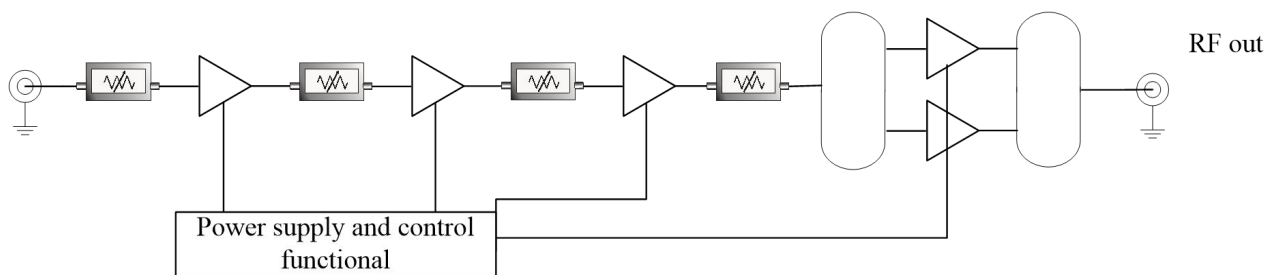

OUTLINE DRAWING (All dimensions in mm [inch])

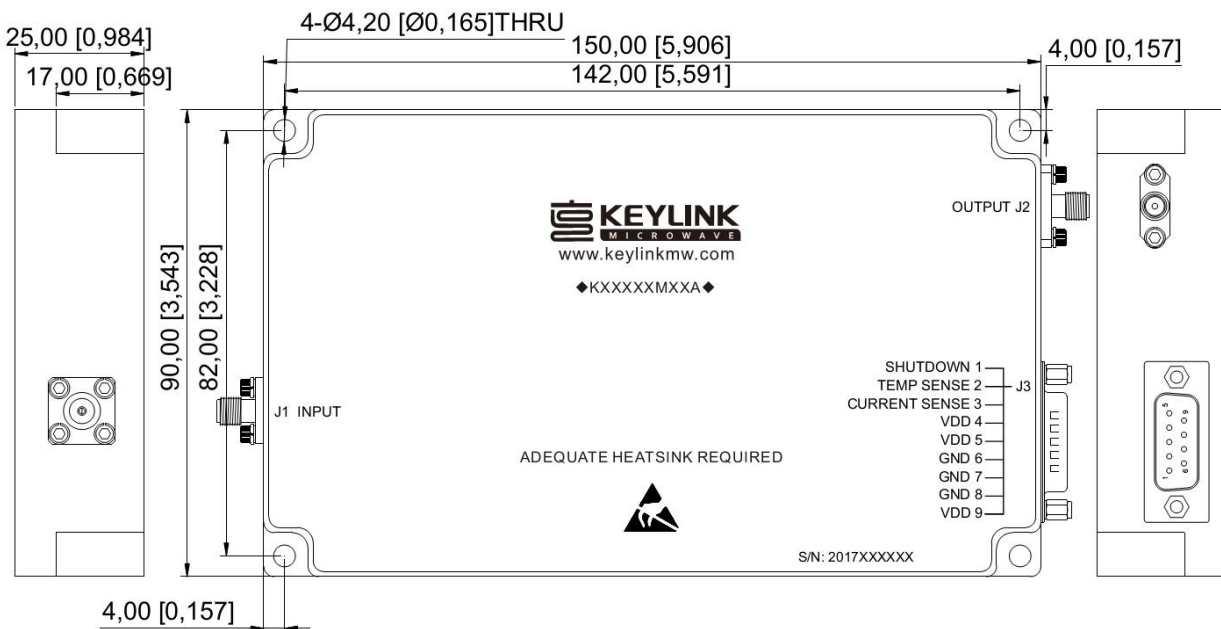

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: [sales@keylinkmw.com](mailto:sales@keylinkmw.com)

>> [www.keylinkmw.com](http://www.keylinkmw.com)


Specifications subject to change without notice

20-1000MHz/80Watt/Module


Model Number: KB00210M49A

TYPICAL PERFORMANCE PLOTS

Graph1: Output Power(Low temp.-20±3°C)

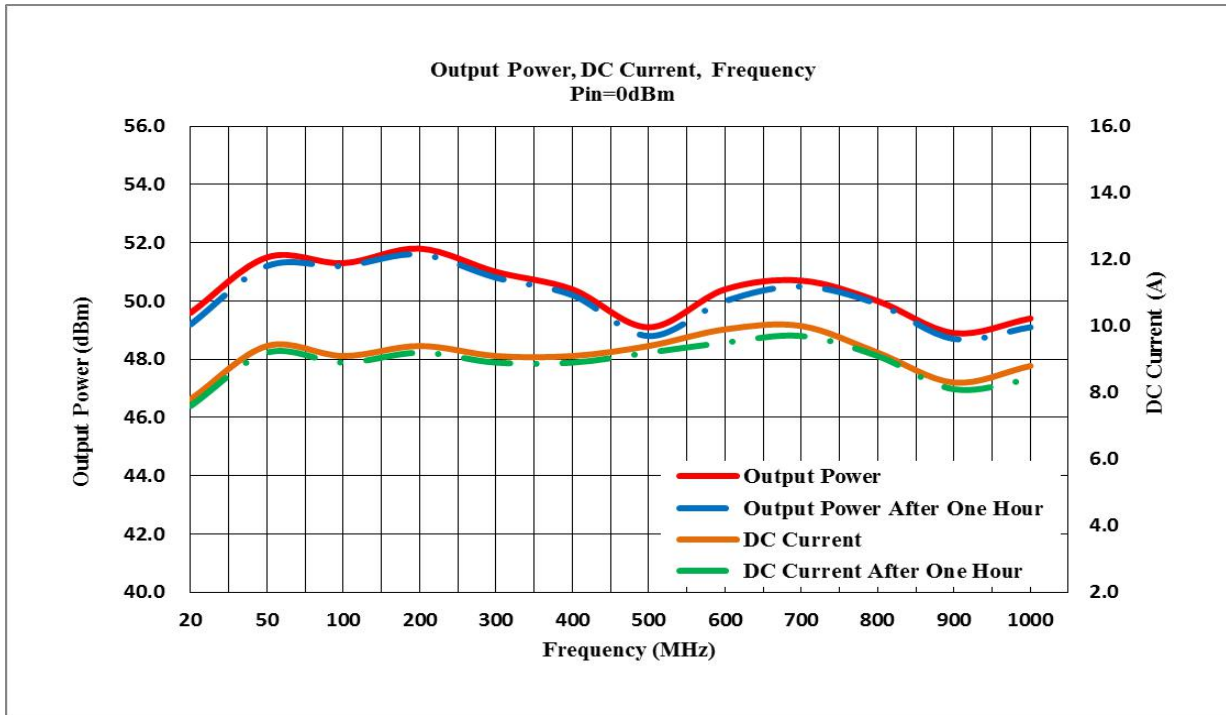

Graph2: Output Power(High temp.+60±3°C)

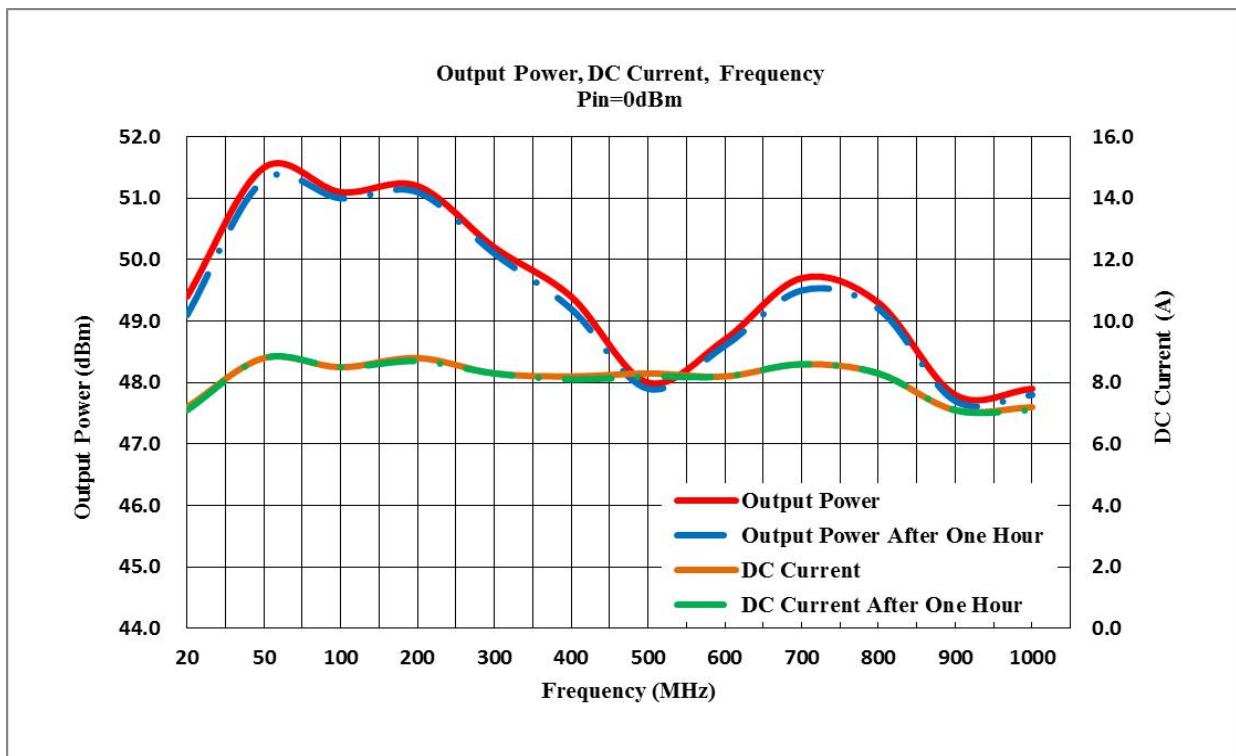

Focus on Your Application

\*Chengdu KeyLink Microwave Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: [sales@keylinkmw.com](mailto:sales@keylinkmw.com)


>> [www.keylinkmw.com](http://www.keylinkmw.com)

Specifications subject to change without notice


20-1000MHz/80Watt/Module

Model Number: KB00210M49A

Graph3: Output Power(Normal temp.+25±3°C)

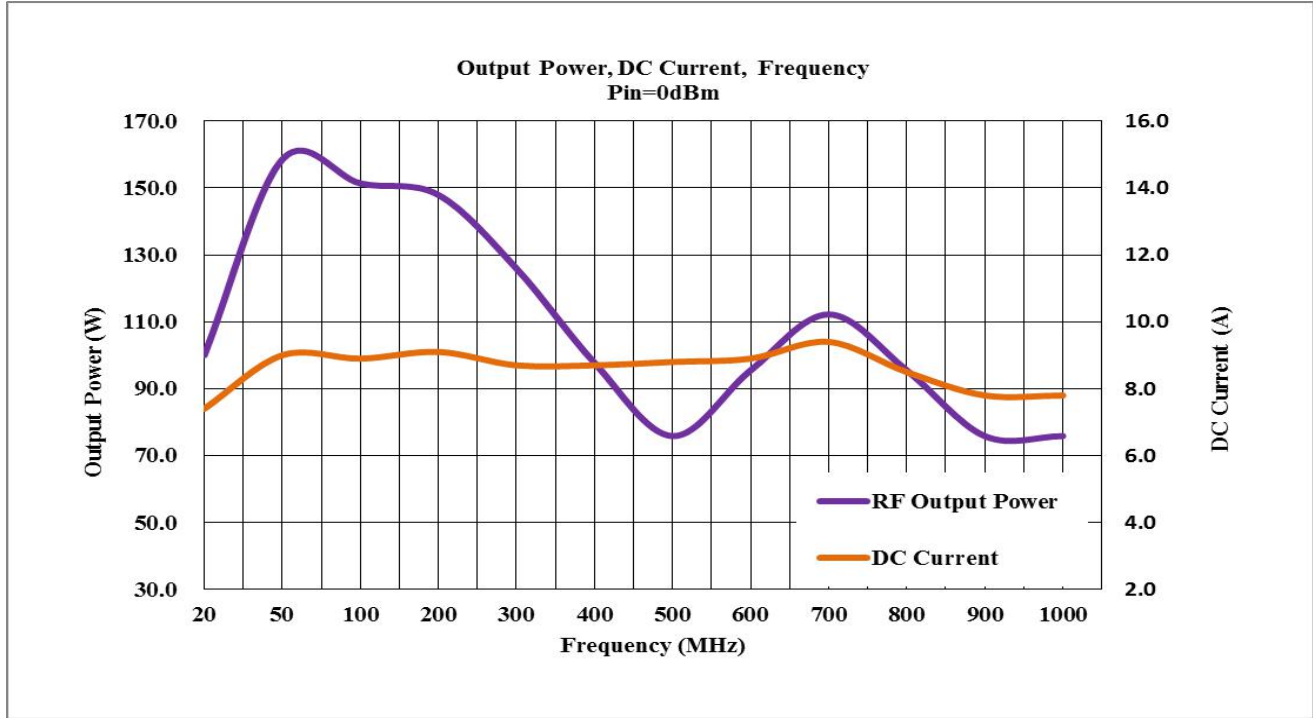

Power Gain:

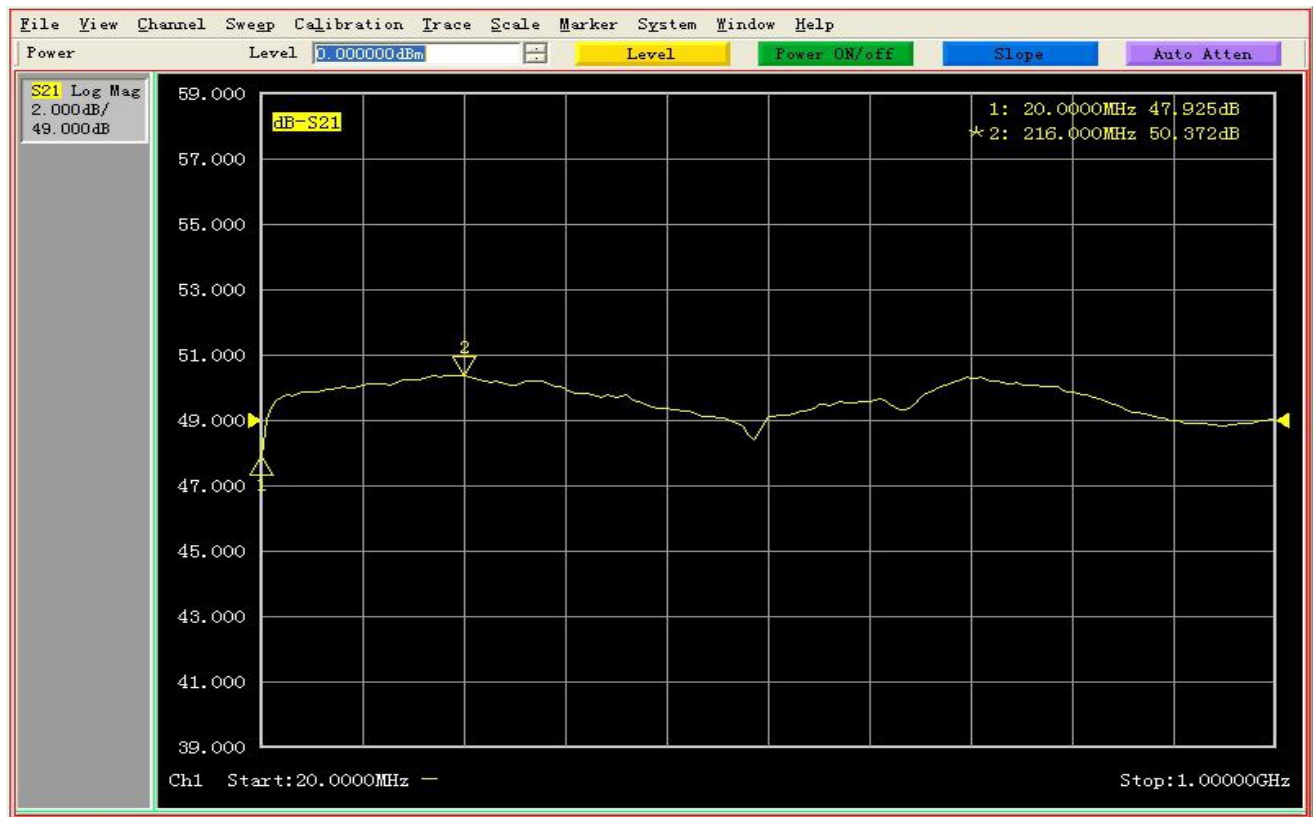

Focus on Your Application

\*Chengdu KeyLink Microwave Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: [sales@keylinkmw.com](mailto:sales@keylinkmw.com)

>> [www.keylinkmw.com](http://www.keylinkmw.com)

Specifications subject to change without notice

20-1000MHz/80Watt/Module

Model Number: KB00210M49A

Input Return Loss:



Note: Adequate heat sink required.

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: [sales@keylinkmw.com](mailto:sales@keylinkmw.com)

>> [www.keylinkmw.com](http://www.keylinkmw.com)

Specifications subject to change without notice