

## 2-6GHz/200Watts/Rack Mount

*Model Number: KB2060S53A*

The KB2060S53A is a rack-mountable unit incorporating a universal voltage power supply and a built in forced air-cooling system. This amplifier subsystem utilizes GaN power device that provides excellent power density, high efficiency, low distortion and wide dynamic range. Due to robust engineering and employment of advanced broadband RF matching networks, combining techniques and qualified components, the amplifier achieves consistent performance with field proven reliability.

**FEATURES:**

- Instantaneous ultra-broadband
- Suitable for CW, AM, and FM modulation type
- Compact and robust design
- Standard front panel manual gain adjust
- Unconditional stability and ruggedness

**ELECTRICAL SPECIFICATIONS @ 220VAC, 25°C, 50Ω System**

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	2000		6000	MHz
Output Power CW	P <sub>SAT</sub>		200		Watt
Power Gain @ P <sub>SAT</sub>	G <sub>P</sub>		57		dB
Input Power for Rated P <sub>SAT</sub>	P <sub>IN</sub>		-4		dBm
Power Gain Flatness	ΔG <sub>p</sub>		±2.5		dB
Gain Adjustment Range	VVA		20		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Harmonics @ P <sub>OUT</sub> =150W	H		-15		dBc
Spurious Signals@ P <sub>OUT</sub> =150W	Spur		-60		dBc
Input/Output Impedance	Impedance		50		dBc
Operating Voltage (single -phase)	V <sub>AC</sub>	180	220	240	Volt
Power Consumption @150W CW	P <sub>D</sub>		2000		Watt

**MECHANICAL SPECIFICATIONS**

Parameter	Value	Limits
Dimensions (W x H x D) – Bench Top / Rack Mount	482 x 221.5 x605 mm [19x8.72x23.8 inch] (5U)	Max
Weight	60 kg [132 lbs]	Typ
RF Connectors Input /Output	Type-N, Female / T Type-N, Female	
Cooling	Built-in internal forced air cooling system	

**ENVIRONMENTAL CHARACTERISTICS (Design to Meet)**

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Ambient Temperature	-10		40	°C	
Storage Temperature	-40		85	°C	
Relative Humidity (non-condensing)			95	%	

**PROTECTIONS**

Input RF drive level without	+5 dBm	Max
VSWR protection	@ 3:1- PA output power will degrade to a safe operation level, and system will still work. @ >3:1 protection will make system shutdown.	
Thermal Overload	Power will Gracefully Degrade, when Ambient Temp >40°C	

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> sales@keylinkmw.com >> www.keylinkmw.com

*Specifications subject to change without notice*

2-6GHz/200Watts/Rack Mount

Model Number: KB2060S53A


AVAILABLE OPTIONS (Selected options refer to the factory)

Description		LCD Touchscreen
Status Monitor	LCD controller	Digital Display, including FWD/REV Power indication (dBm or Watt scale), Standby mode, Fault indication
RS-232	Serial management of device	D-Sub 9-position Male

I/O CONNECTOR-Monitor Display or RS-232

Pin#	Description	Specifications	Option FGA	LED
1	FWD	Forward detected power		
2	REV	Reverse detected power		
3	VVA control (Optional)	Gain Control: 0V= Max. Attenuator, 5V= Min. Attenuator		
4	Reserved	Reserved		
5	Reserved	Reserved		
6	Reserved	Reserved		
7	Reserved	Reserved		
8	Reserved	Reserved		
9	Reserved	Reserved		

OUTLINE DRAWING All dimensions in mm [inch]

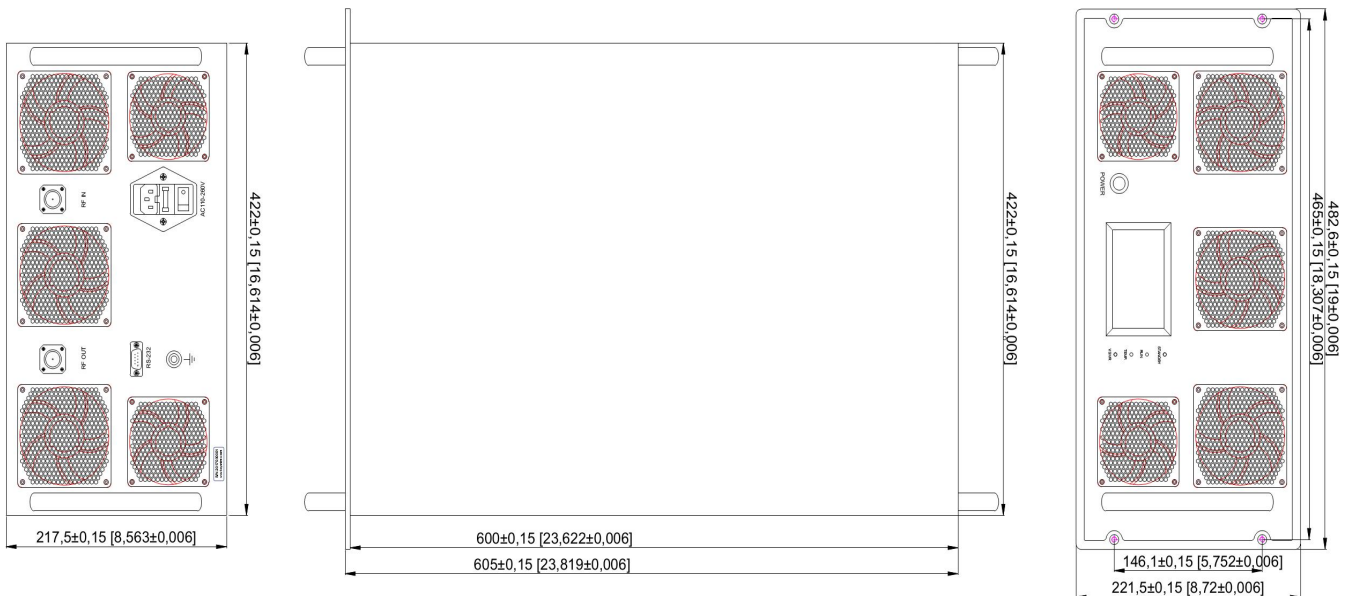

Focus on Your Application

\*Chengdu KeyLink Microwave Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708

>> Fax: +86(28)87883266

>> sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice

2-6GHz/200Watts/Rack Mount

Model Number: KB2060S53A

TYPICAL PERFORMANCE PLOTS

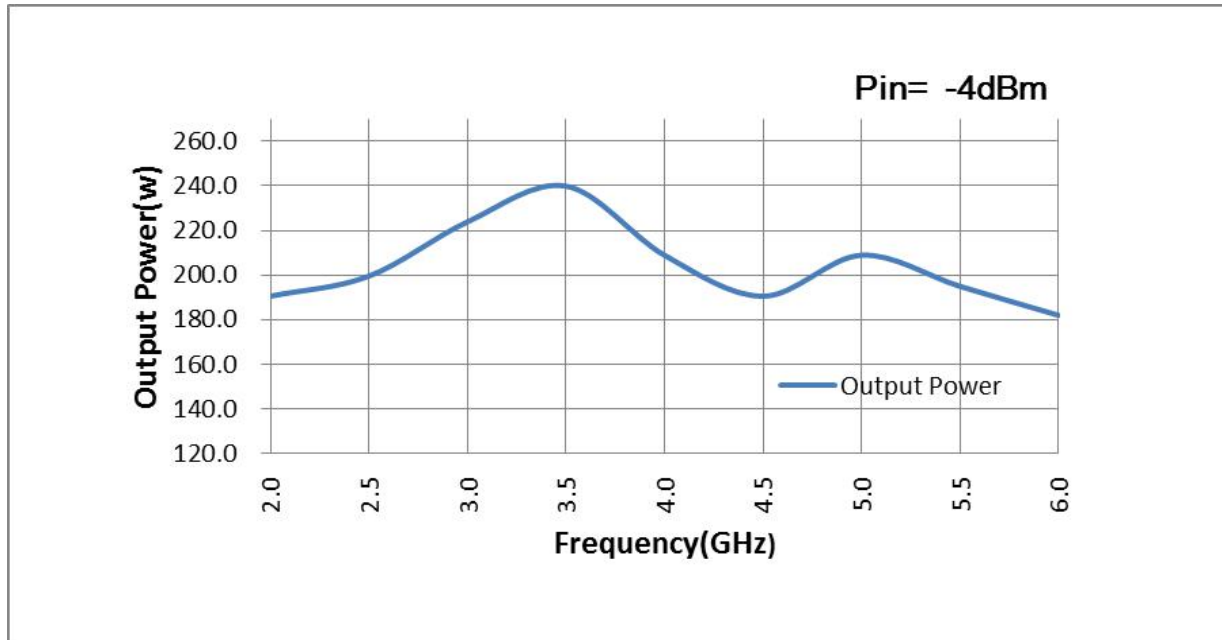

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice