

## 2.5-6GHz/50Watts/Rack Mount

*Model Number: KB2560S47A*

The KB2560S47A is a rack-mountable unit incorporating a universal voltage power supply and a built in forced air-cooling system. This amplifier subsystem utilizes GaN power device that provides excellent power density, high efficiency, low distortion and wide dynamic range. Due to robust engineering and employment of advanced broadband RF matching networks, combining techniques and qualified components, the amplifier achieves consistent performance with field proven reliability.

### FEATURES:

- Instantaneous ultra-broadband
- Suitable for CW, AM, and FM modulation type
- Compact and robust design
- Standard front panel manual gain adjust
- Unconditional stability and ruggedness

### ELECTRICAL SPECIFICATIONS @ 220VAC, 25°C, 50Ω System

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	2500		6000	MHz
Output Power CW	P <sub>SAT</sub>		50		Watt
Power Gain @ P <sub>SAT</sub>	G <sub>P</sub>		47		dB
Input Power for Rated P <sub>SAT</sub>	P <sub>IN</sub>		0		dBm
Power Gain Flatness	ΔG <sub>p</sub>		±2.5		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Harmonics @ P <sub>OUT</sub> =30W	H		-15		dBc
Spurious Signals@ P <sub>OUT</sub> =30W	Spur		-60		dBc
Input/Output Impedance	Impedance		50		dBc
Operating Voltage (single -phase)	VAC	180	220	240	Volt
Power Consumption @30W CW	PD		800		Watt

### MECHANICAL SPECIFICATIONS

Parameter	Value	Limits
Dimensions (W x H x D) – Bench Top / Rack Mount	483 x 88.1 x 425 mm [19x3.5x17.5 inch] (2U)	Max
Weight	35kg [77 lbs]	Typ
RF Connectors Input /Output	Type-N, Female / T Type-N, Female	
Cooling	Built-in internal forced air cooling system	

### ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Ambient Temperature	-10		40	°C	
Storage Temperature	-40		85	°C	
Relative Humidity (non-condensing)			95	%	

### PROTECTIONS

Input RF drive level without damage	+5 dBm	Max
VSWR protection@30W	@ 3:1- PA output power will degrade to a safe operation level, and system will still work. @ >3:1 protection will make system shutdown.	
Thermal Overload	Power will Gracefully Degrade, when Ambient Temp >40°C	

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> sales@keylinkmw.com >> www.keylinkmw.com

*Specifications subject to change without notice*

## 2.5-6GHz/50Watts/Rack Mount

Model Number: KB2560S47A


AVAILABLE OPTIONS (Selected options refer to the factory)

Description		LCD	Screen
RS-232	Serial management of device		D-Sub 9-position Male

### I/O CONNECTOR-Monitor Display or RS-232

Pin#	Description	Specifications	Option FGA	LED
1	Reserved	Reserved		
2	Reserved	Reserved		
4	RS232(-)	Transmit data-R x D		
5	RS232(+)	Transmit data-TxD		
6	SGND	Transmit data- Ground		
7	GND	Ground		
8	Reserved	Reserved		
9	Reserved	Reserved		

### OUTLINE DRAWING All dimensions in mm [inch]

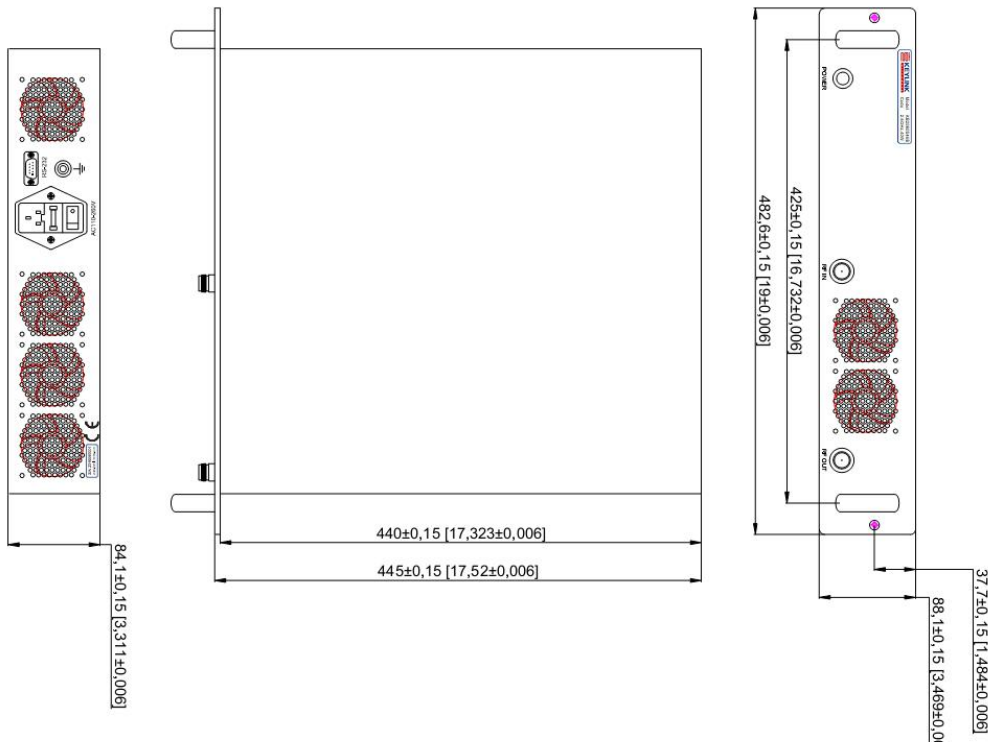

*Focus on Your Application*

\*Chengdu KeyLink Microwave Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708

>> Fax: +86(28)87883266

>> sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice

## 2.5-6GHz/50Watts/Rack Mount

Model Number: KB2560S47A

TYPICAL PERFORMANCE PLOTS(For reference only)

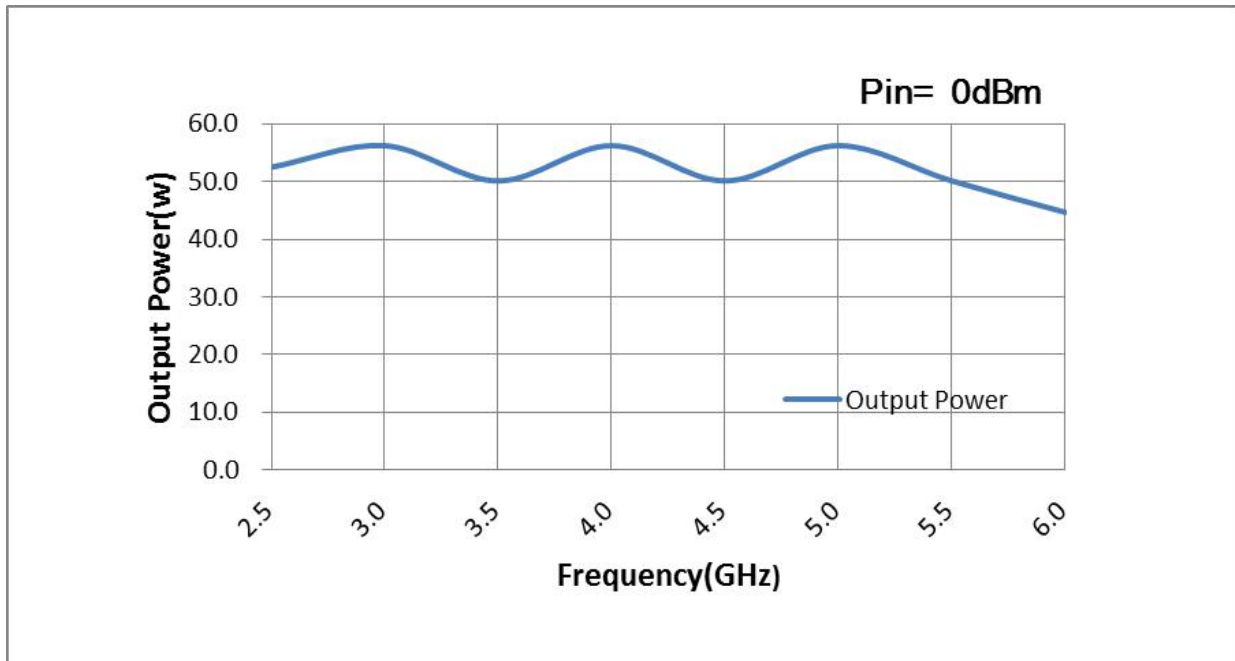

**Note:**

1. Adequate heatsink required.
2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with KeyLink sales team if you have any question.

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice