

### 3.5-3.6GHz/200Watt/Module

Model Number: KN3550M53A

The model KN3550M53A is a narrowband high power amplifier operating between 3.5GHz and 3.6GHz and offering a wide dynamic Range with 200Watts typical saturated power. The employment of advanced high power devices in manufacturing ensures this module exceptional power performance, long term reliability and high efficiency.

**FEATURES:**

- Narrowband & High power;
- High Efficiency;
- Great Linearity;
- Small Size & Light Weight;
- Low Distortion

**ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω**

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	3.5		3.6	GHz
RF Output Power @Psat	Psat	150	200		Watt
Power Gain	Gp		53		dB
Power Gain Flatness	Δ Gp		±1.5		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Harmonics @100W	H		-15		dBc
Spurious Signals	Spur		-55		dBc
Switch On/Off@10-90% Time	TON/OFF		2		μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	24	28	32	Volt
DC Current @200W	IDD		26		Amp

**MECHANICAL SPECIFICATIONS**

Parameter	Value	Units	Notes
Dimensions	250x200x30[9.84x7.87x1.18]	mm [inch]	Maximum
Weight	3 [6.6]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	Type-N, Female		
DC Interface Connector	Hybrid, D-Sub 7-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

**ENVIRONMENTAL CHARACTERISTICS (Design to Meet)**

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity ( non-condensing )			95	%	

**ABSOLUTE MAXIMUM RATING**

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ POUT =100W	∞ @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

*Specifications subject to change without notice*


3.5-3.6GHz/200Watt/Module

Model Number: KN3550M53A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	VDD	28V <sub>DC</sub>
A2	GND	Ground
1	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	CURRENT SENSE	Analog voltage relative to I <sub>DD</sub> @ 100mV per Ampere
3	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
4	FORWARD MONITOR	Analog voltage relative to forward power level
5	REVERSE MONITOR	Analog voltage relative to reflected power level

OUTLINE DRAWING (All dimensions in mm [inch])

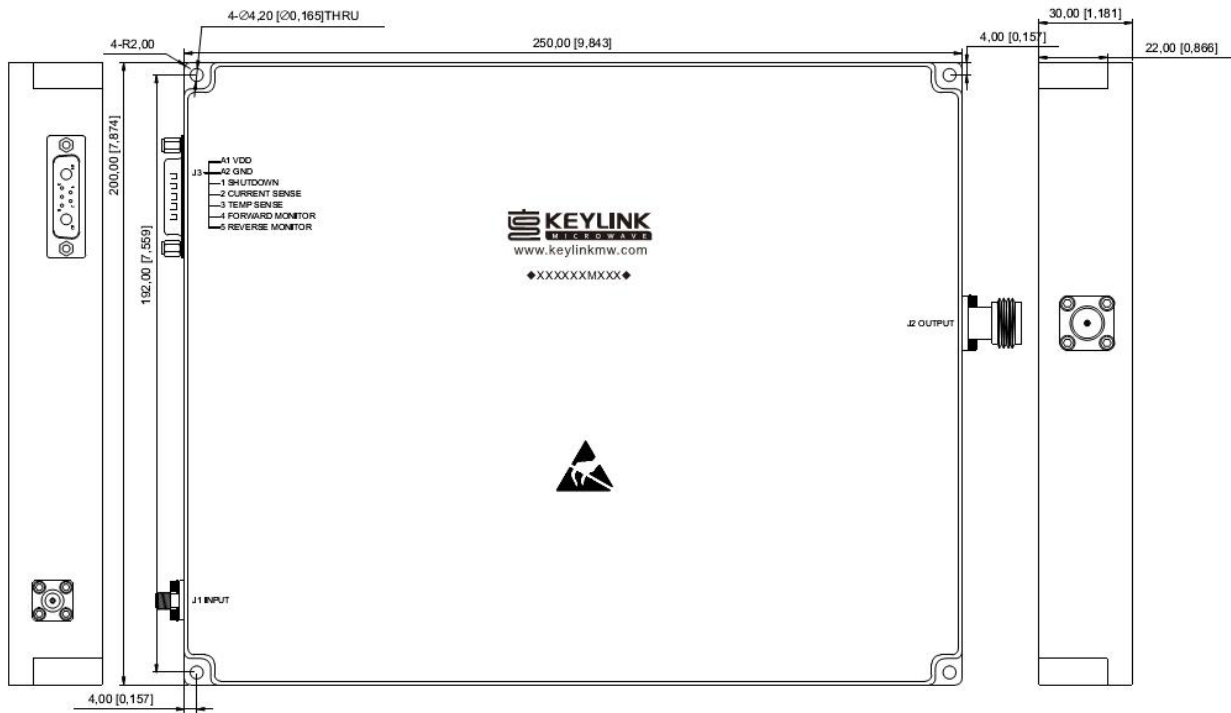

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com


*Specifications subject to change without notice*

3.5-3.6GHz/200Watt/Module


Model Number: KN3550M53A

TYPICAL PERFORMANCE PLOTS

Graph1: Output Power (Low temp. -20±3°C)

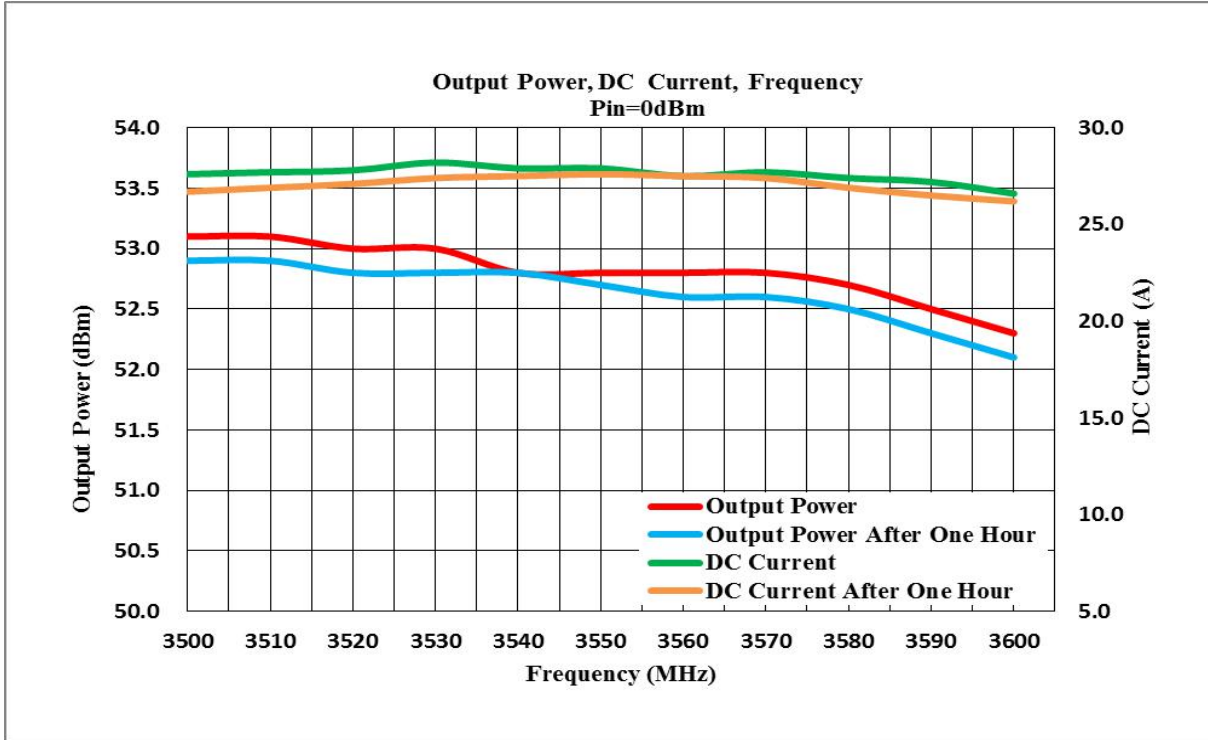

Graph2: Output Power (High temp. +60±3°C)

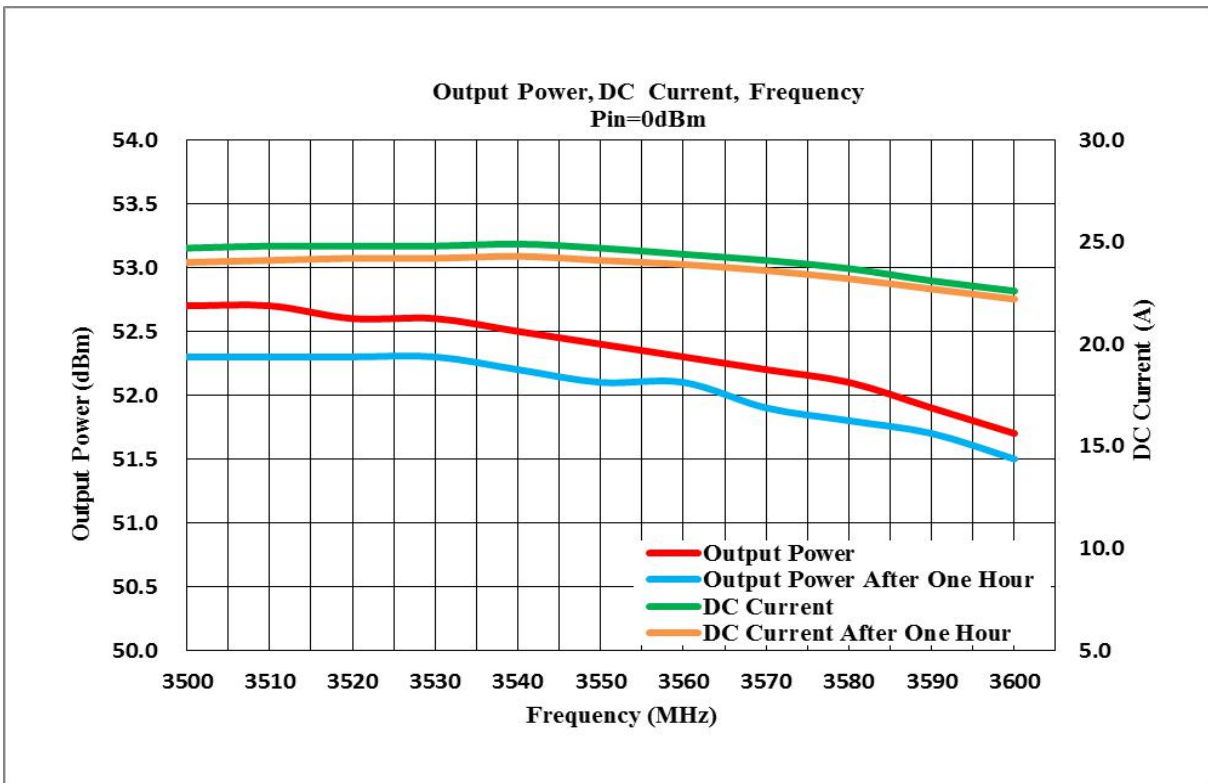

Focus on Your Application

\*Chengdu KeyLink Microwave Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


### 3.5-3.6GHz/200Watt/Module

Model Number: KN3550M53A

Graph3: Output Power (Normal temp. +25±3°C)

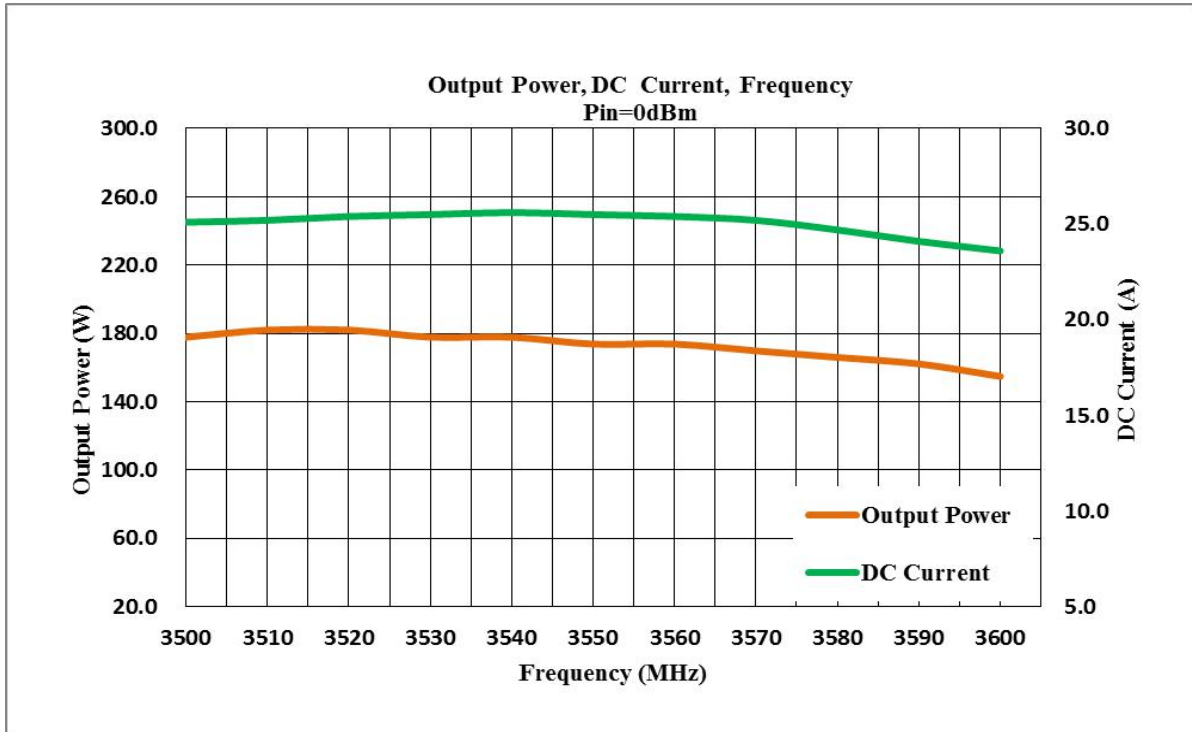

Graph4: Power Gain:

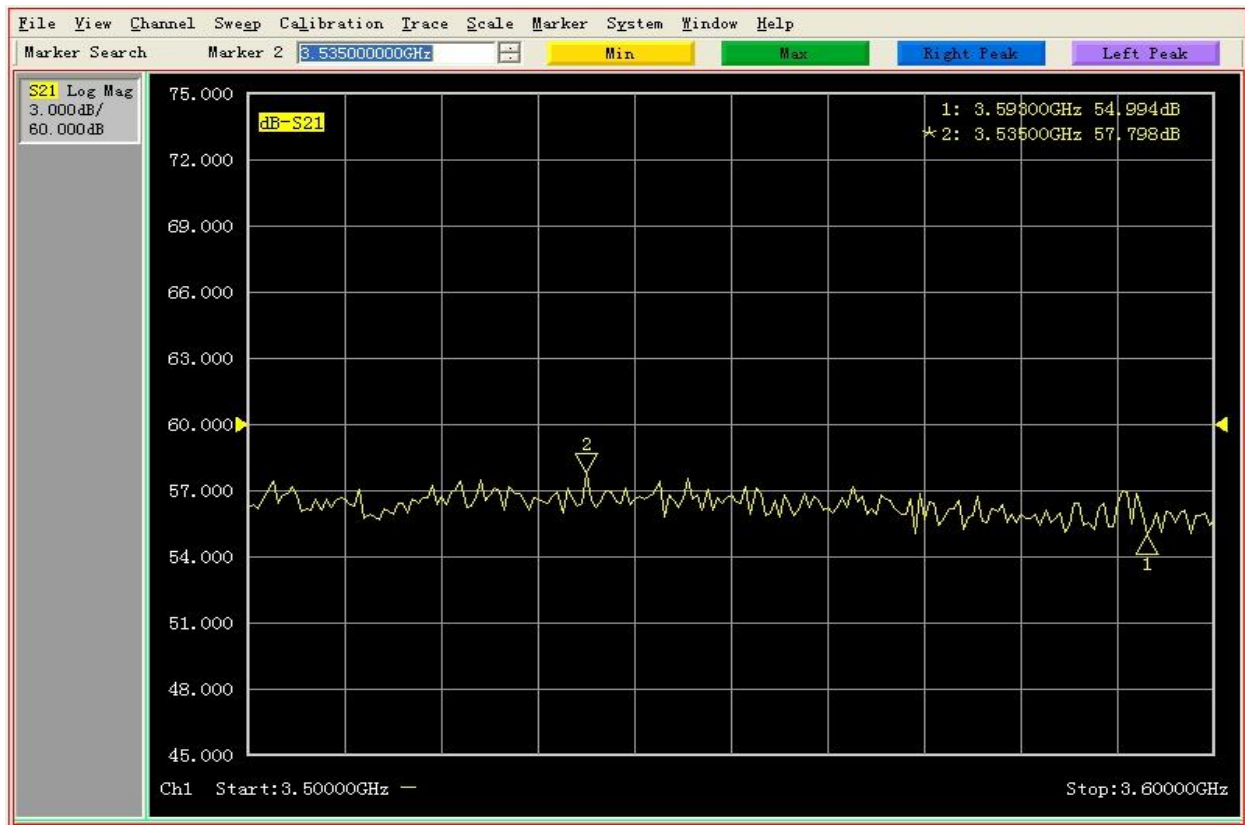

Focus on Your Application

\*Chengdu KeyLink Microwave Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

3.5-3.6GHz/200Watt/Module

Model Number: KN3550M53A

Graph5:Input Return Loss:

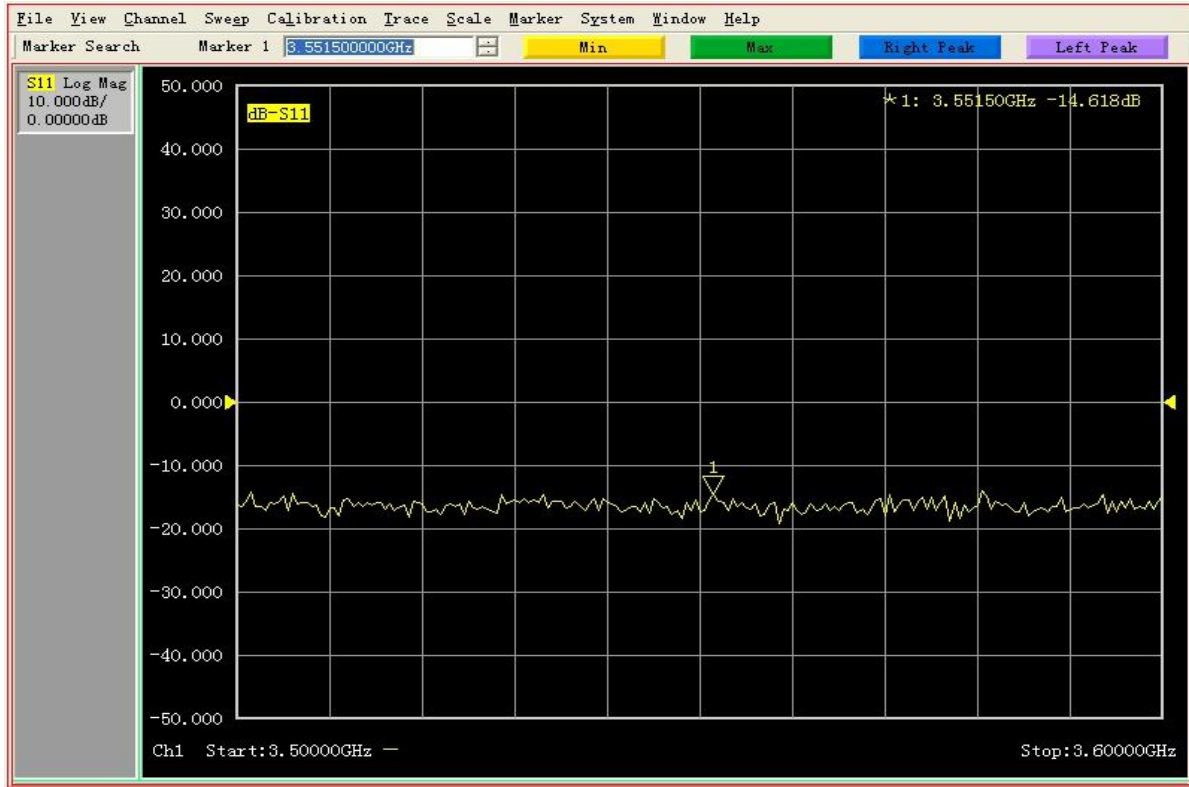

**Note:** Adequate heatsink required.

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

*Specifications subject to change without notice*