

## 9.1-10.1GHz/10Watt/Module

Model Number: KN9600M40A

The model KN13600M40A is a high power amplifier operating between 9.1GHz and 10.1GHz and offering a wide dynamic Range with 10 Watts saturated power. The employment of advanced high power devices in manufacturing ensures this module exceptional power performance, long term reliability and high efficiency. It is ideal for multi octave broadband high power RF, Ku linear applications.

### FEATURES:

- Narrowband & High power
- High Efficiency
- Great Linearity
- Small Size & Light Weight
- Low Distortion

### ELECTRICAL SPECIFICATIONS @ +13.0VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	9.1		10.1	GHz
RF Output Power P1	P1	10			Watt
Power Gain	Gp		40		dB
Power Gain Flatness	Δ Gp		±2		dB
Input Return Loss	S <sub>11</sub>			-10	dB
Harmonics @10W	H		-10	-5	dBc
Spurious Signals	Spur		-60	-50	dBc
Switch On/Off@10-90% Time	TON/OFF		2	5	μS
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	10	13	14	Volt
DC Current @10W	IDD		8.5	10	Amp

### MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	150x90x25 [5.9x3.55x0.98]	mm [inch]	Maximum
Weight	1.2 [2.64]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

### ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-40		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

### Absolute Maximum Rating

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ POUT =5W	∞ @ all load phase & amplitude for duration of 1 minutes; 3:1 @ all load phase & amplitude continuous
Over Temperature	85°C @ heatsink [restored @ 60°C]

*Focus on Your Application*

\*Chengdu KeyLink Microwave Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice


## 9.1-10.1GHz/10Watt/Module

Model Number: KN9600M40A

### DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1,6,7	VDD	13V <sub>DC</sub>
8,9	GND	Ground
5	SHUTDOWN	Amplifier Disable: TTL Logic High (3.3V) (Internally Pulled-Low)
2	CURRENT MONITOR	Analog voltage relative to I <sub>DD</sub> @ 100mV per Ampere
3	TEMP MONITOR	Analog voltage relative to Module's Temperature @ 10 mV/°C
4	NC	No electrical connection

### OUTLINE DRAWING (All dimensions in mm [inch])

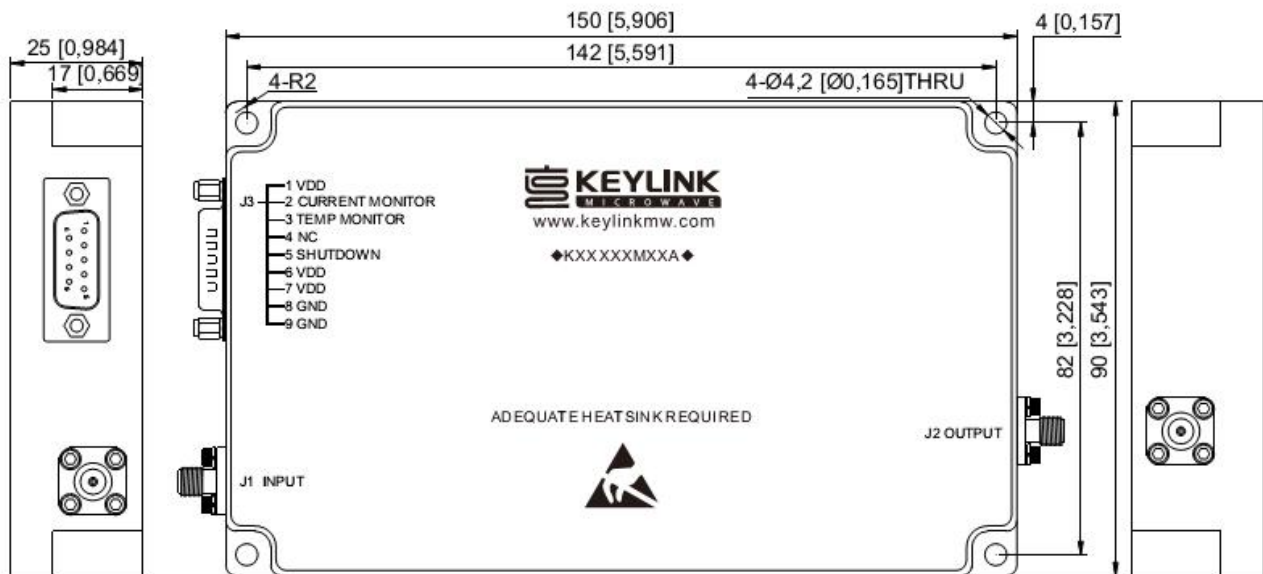

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com


Specifications subject to change without notice

## 9.1-10.1GHz/10Watt/Module


Model Number: KN9600M40A

### TYPICAL PERFORMANCE PLOTS

Graph1: Output Power(Low temp.-20±3°C)

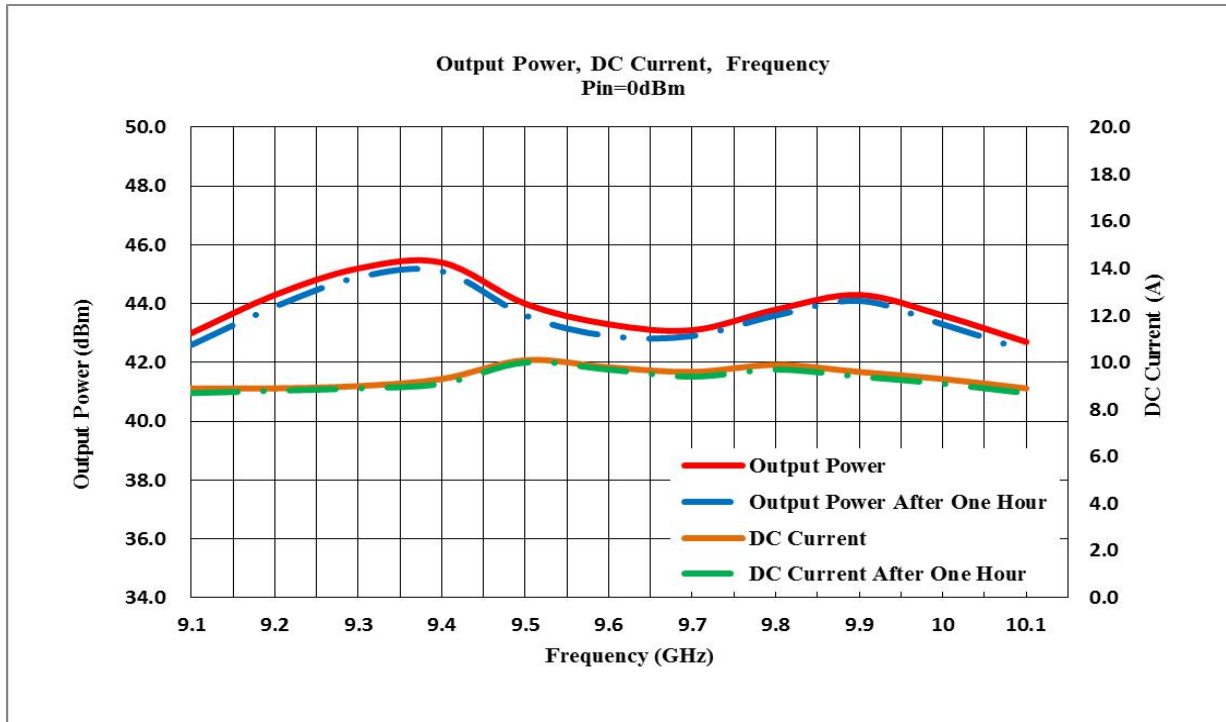

Graph2: Output Power(High temp.+60±3°C)

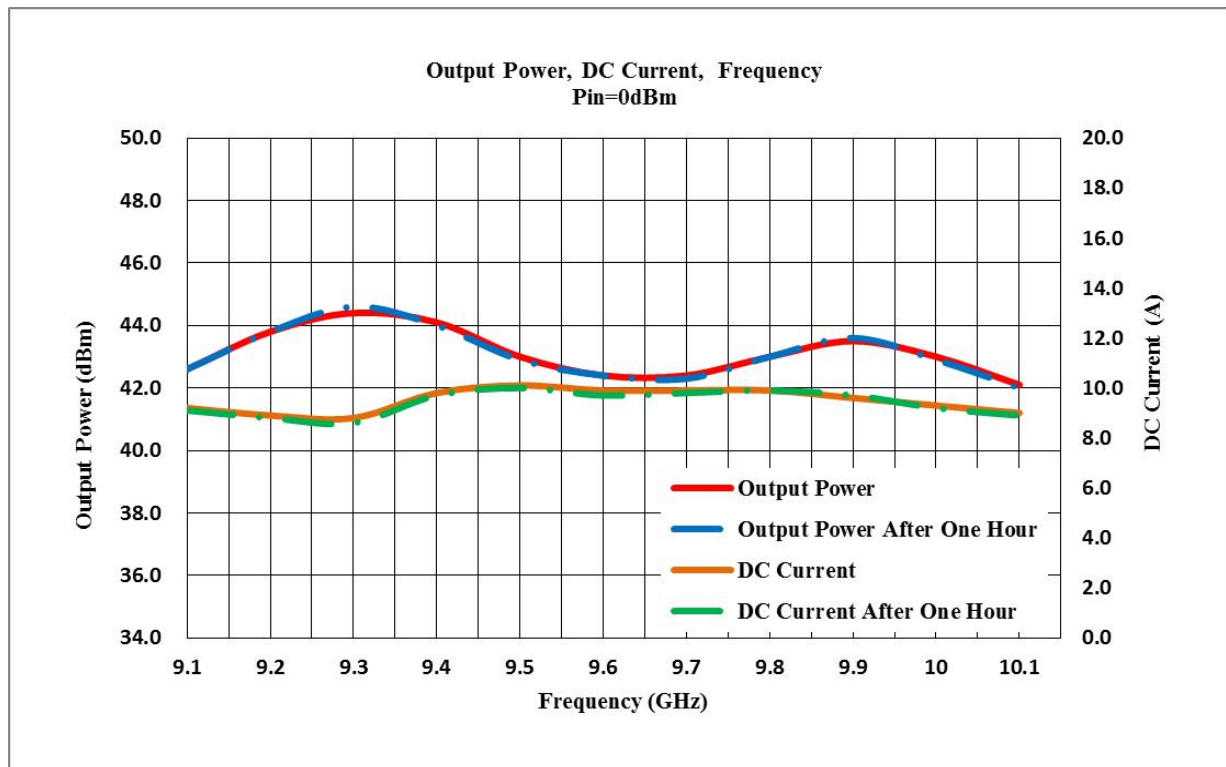

*Focus on Your Application*

\*Chengdu KeyLink Microwave Technology Co., Ltd.\*

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266


>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

### 9.1-10.1GHz/10Watt/Module

Model Number: KN9600M40A

Graph3: Output Power(Normal temp.+25±3°C)

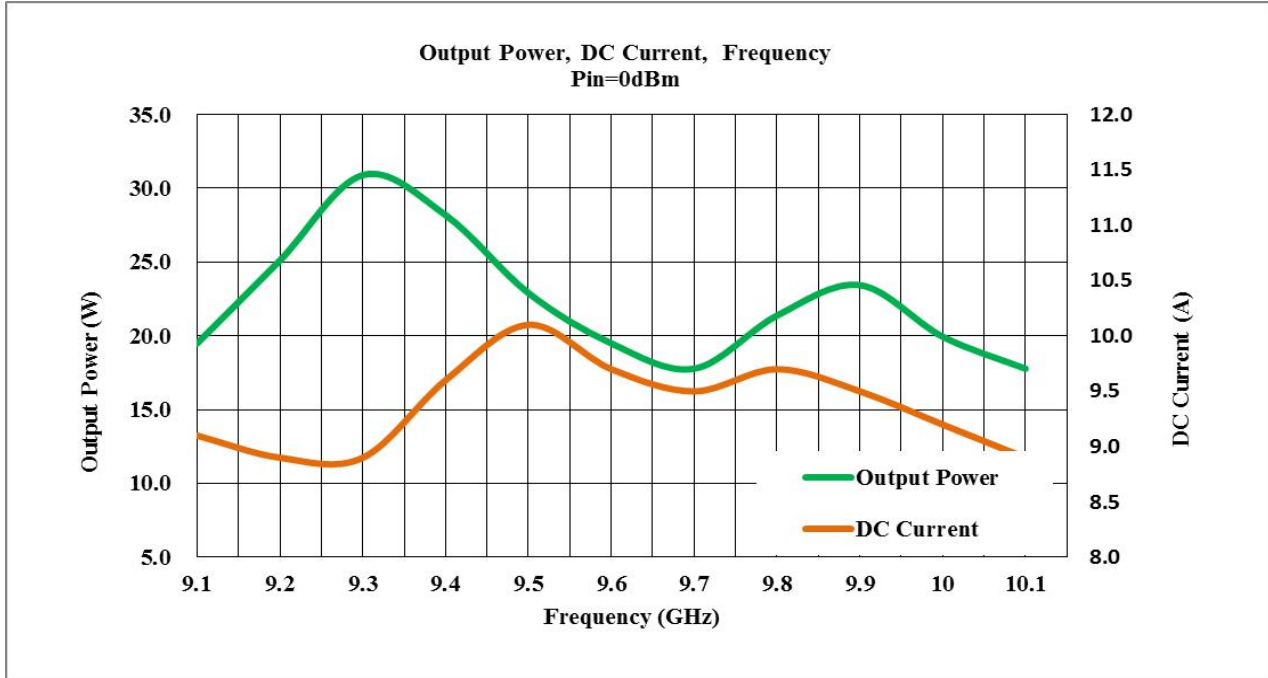

Power Gain:



*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

## 9.1-10.1GHz/10Watt/Module

Model Number: KN9600M40A

Input Return Loss:



**Note:**

1. Adequate heatsink required.
2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with KeyLink sales team if you have any question.

*Focus on Your Application*

**\*Chengdu KeyLink Microwave Technology Co., Ltd.\***

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761\*8708 >> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com >> www.keylinkmw.com

*Specifications subject to change without notice*