

9.2-9.8GHz/200Watt/Module

Model Number: KNP9500M53A

Model KNP9500M53A is an X-band high power pulsed amplifier operating in the 9.2 to 9.8 GHz frequency range and offering pulsed width up to 300µs with duty cycle up to 5%. The amplifier provides in excess of 200Watts peak output power into a 50 Ohm load. The employment of gallium nitride (GaN) and chip-and-wire technology in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for high power pulse applications or radar system.

FEATURES:

- Small Size and light weight
- Power added efficiency > 10%
- Digital interface option
- Forward and reflected power coupling ports
- pulse width/duty cycle protection
- Over voltage, and over current protection

ELECTRICAL SPECIFICATIONS @ +32.0VDC, 25°C, 10µS, 5%, 50Ω

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Frequency	BW	9.2		9.8	GHz
RF Output Power	PPK		200		Watt
Duty Cycle	Duty Cycle			5	%
Pulse Width	PWIDTH	0.5		300	µS
PRI	PRI	40		1500	µS
Harmonics @ Pout =150W	H		-40		dBc
Spurious Signals	Spur		-55		dBc
RF Input Power @ PSAT	PIN	0		1	dBm
Input Return Loss/ Output Return Loss	S11/ S22		-10		dB
Rise /Fall time (Pulse Performance)	TRISE/FALL/OFF(10-90)		100		nS
Switching Speed	TON/OFF		2	5	µS
Power droop	Droop		1		dB
In/Output Impedance	Impedance		50		Ω
Operating Voltage	VDC	30	32	34	Volt
Peak Current Consumption @ Pout =150W	IDD			20	Amp
Average Current Consumption @ Pout =150W	IDD		10		Amp
Power Added Efficiency	Efficiency		12		%

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	180x 125 x25 [7x4.9x0.98]	mm [inch]	Max
Weight	2[4.4]	kg [lb]	Typ
RF Connectors Input	Type-SMA, Female		
RF Connectors Output	Type-SMA, Female		
DC Interface Connector	Hybrid,D-Sub 7-Pin, Male		
Cooling	External Heatsink Required (Optional supplying)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-20		60	°C	
Non-operating Temperature	-25		65	°C	Storage
Relative Humidity (non-condensing)			95	%	

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice

9.2-9.8GHz/200Watt/Module

Model Number: KNP9500M53A

Absolute Maximum Rating

Input RF drive level without damage	+5 dBm (Max)
Load VSWR @ Pout =150W	5:1 @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous
Over Temperature	90°C @ heatsink [restored @ 60°C]


DC INTERFACE CONNECTOR

Pin #	Description	Specifications
A1	GND	Ground
A2	VDD	40VDC
1	RF ON/OFF	RF On: TTL Logic High (2.8-5.5V) Amplifier Radiate / To forbid radiate
2	TX-GATE	TX-GATE On: TTL Logic High (2.8-5.5V) Amplifier Standby /
3	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
4	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
5	GND	Ground

PROTECTION AND WARNING FUNCTION

- Over threshold of VSWR (High VSWR)
- Over threshold of duty cycle (High duty cycle)
- Over threshold of current
- Over threshold of temperature
- Warning low RF output power

OUTLINE DRAWING (All dimensions in mm [inch])

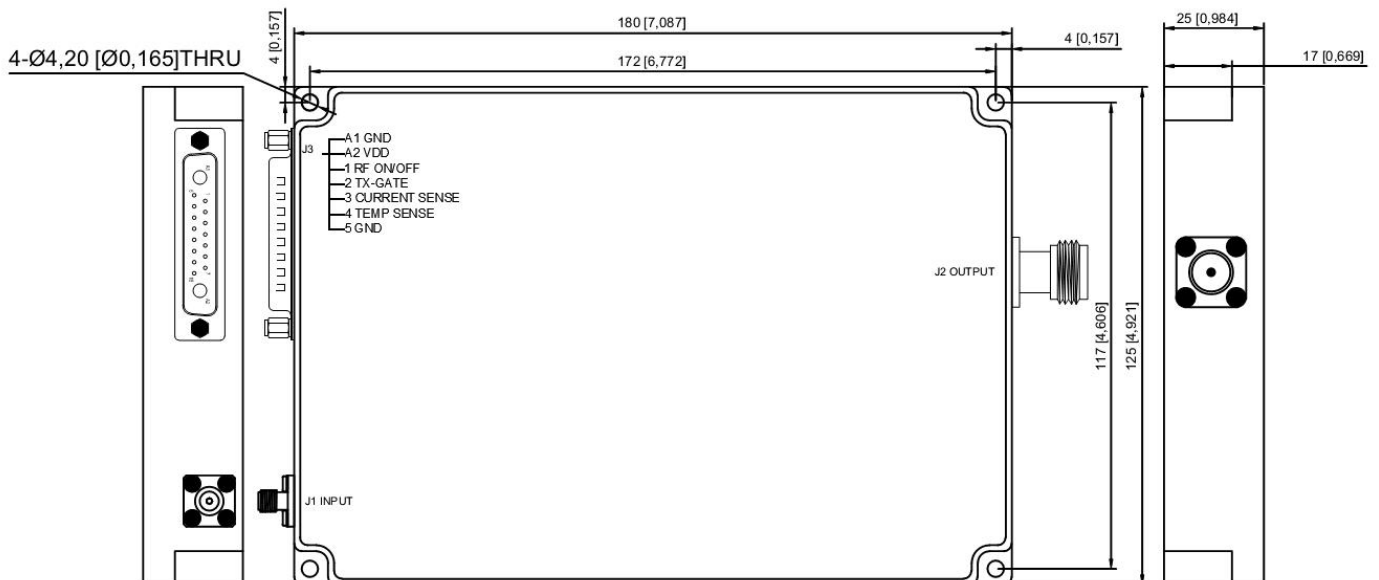

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice

9.2-9.8GHz/200Watt/Module

Model Number: KNP9500M53A

TYPICAL PERFORMANCE PLOTS(For reference only)

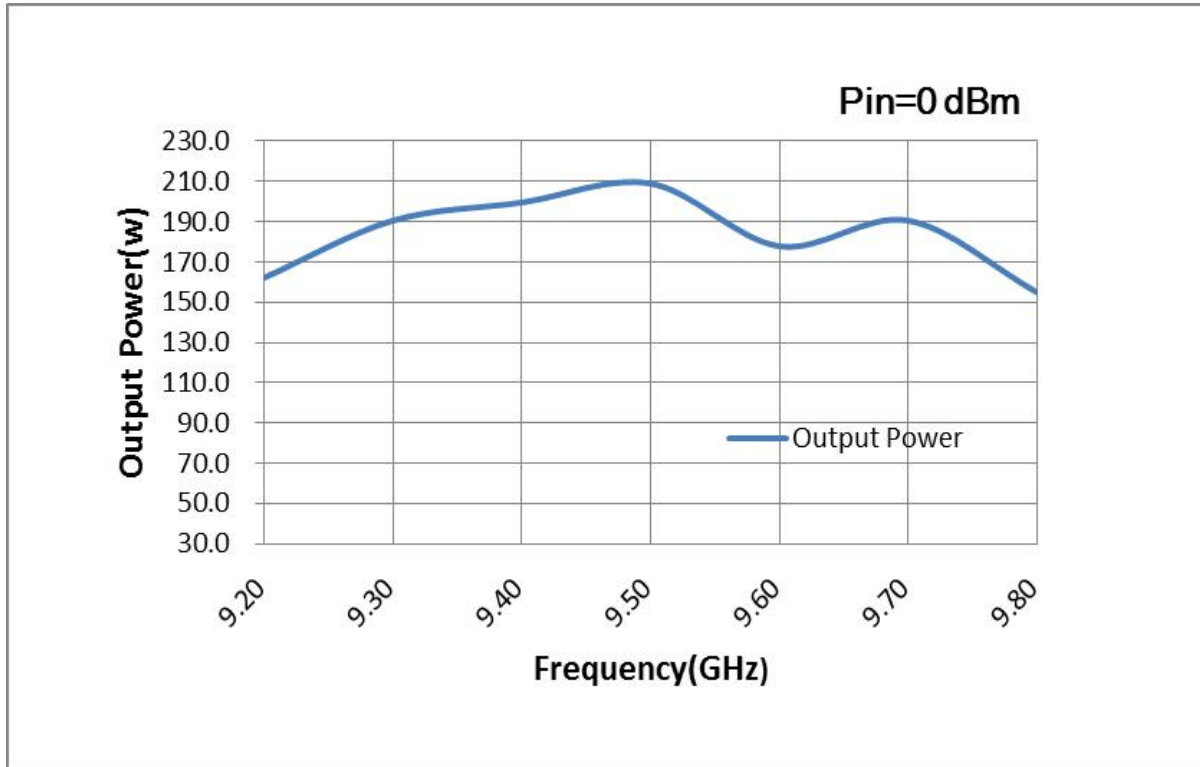

Note:

1. Adequate heatsink required.
2. This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with KeyLink sales team if you have any question.

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice