



LB-90-25-A2SPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain Rectangular Waveguide Interface

Standard Gain Horn Antenna Operating From 8.2GHz to 12.4GHz With a Nominal 25dB Gain With Rectangular Waveguide Interface

Product Information

SKU	LB-90-25-A2SPO
-----	----------------

Description

Standard Gain Horn Antenna LB-90-25-A2SPO, operating from 8.2 to 12.4GHz with a nominal 25dB gain and low VSWR 1.1:1 with FBP100 output. The model LB-90-25-A2SPO has uniform gain through its frequency span, providing efficient performance characteristics and directionality. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	8.2	Output Type	Waveguide
Frequency, Max (GHz)	12.4	Flange Style	Square
Waveguide Type	Rectangular	Flange Type	Cover
Waveguide Size EIA WR	WR90	Flange Designation	FBP100(UBR100)
Gain, Typ (dBi)	25	Mechanical Specification	
Polarization	Linear	Figure	A Type
3dB Beamwidth, E-Plane, Typ (Deg.)	8	Body Material	Al
3dB Beamwidth, H-Plane, Typ (Deg.)	10	Finish	Chemical Conversion Coating, Gray Paint
Cross Pol. Isolation, Typ (dB)	35	Size, W (mm)	255
VSWR, Typ	1.1:1	Size, H (mm)	215
		Size, L (mm)	646
		Weight, (kg)	2.3

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	--	--------------	---

Outline Drawing

FBP100 Output with Radome (Option, P/N: LB-90-25-A2SPO, Outdoor Application)

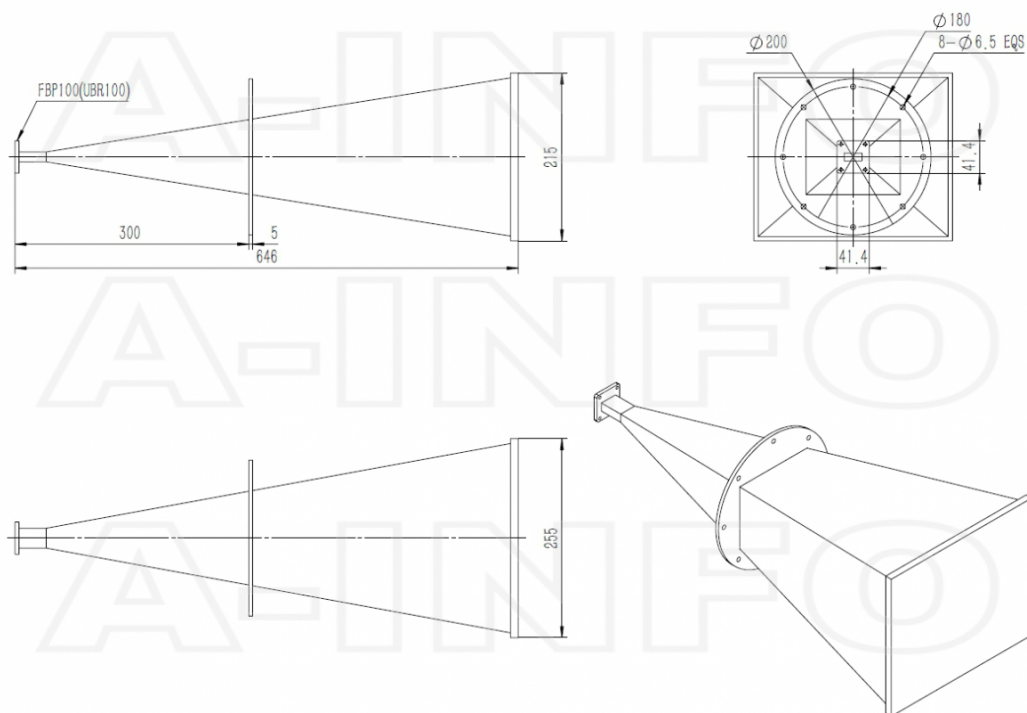


Flange Drawing

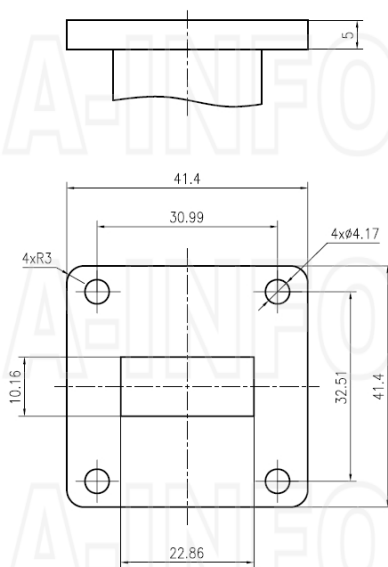


FBP100

Typical Test Results

Gain

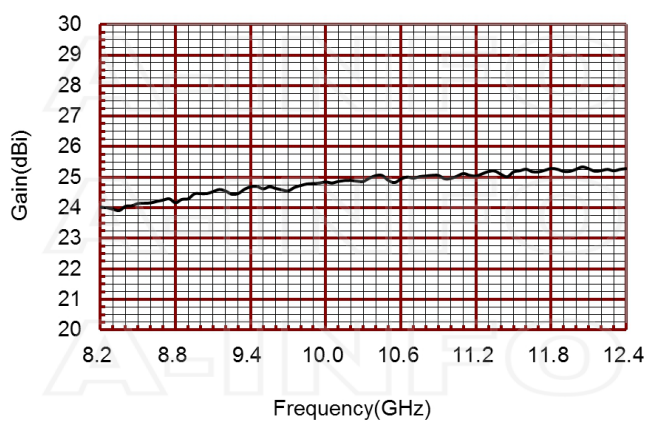


Antenna Factor

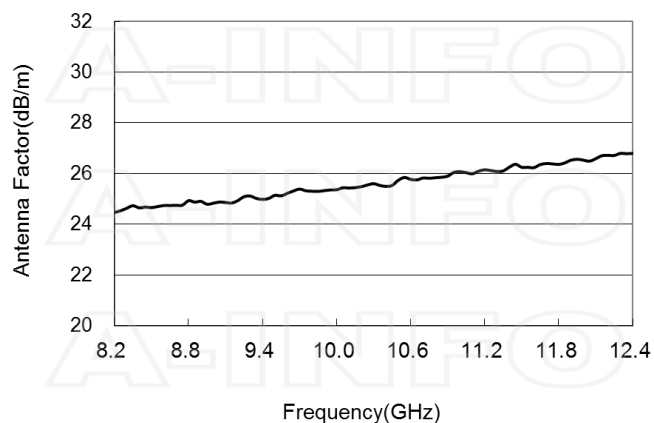


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	Antenna Factor(dB/m)
8.20	24.02	24.46
8.50	24.14	24.66
9.00	24.46	24.83
9.50	24.62	25.15
10.00	24.85	25.36
10.50	24.90	25.74
11.00	24.96	26.07
11.50	25.18	26.25
12.00	25.26	26.53
12.40	25.28	26.80





Cross Polarization Isolation






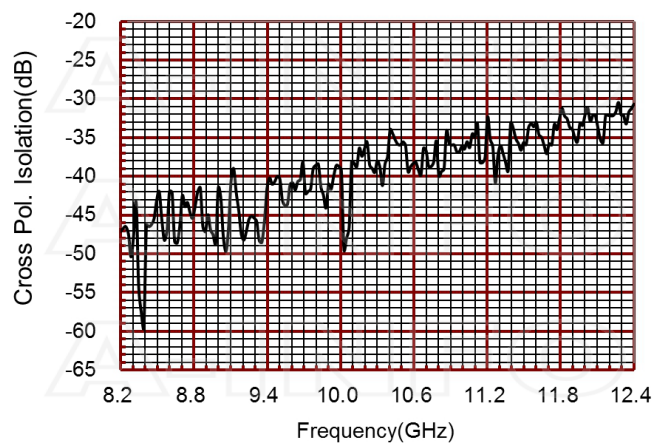


VSWR

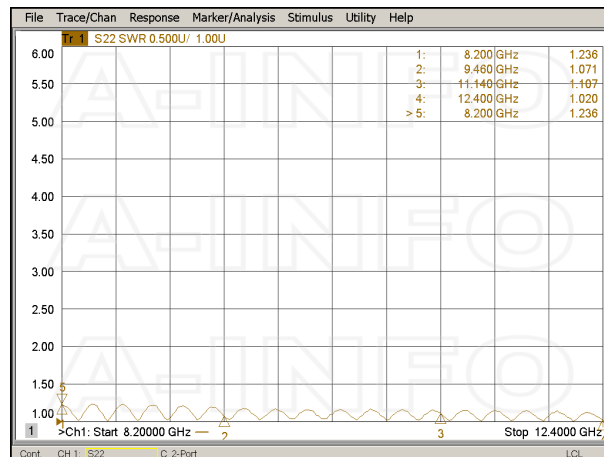

Pattern

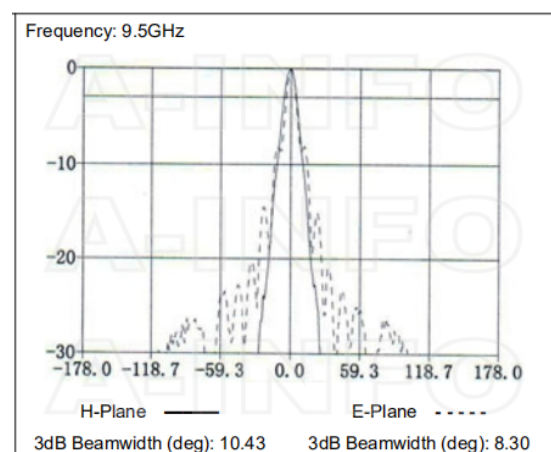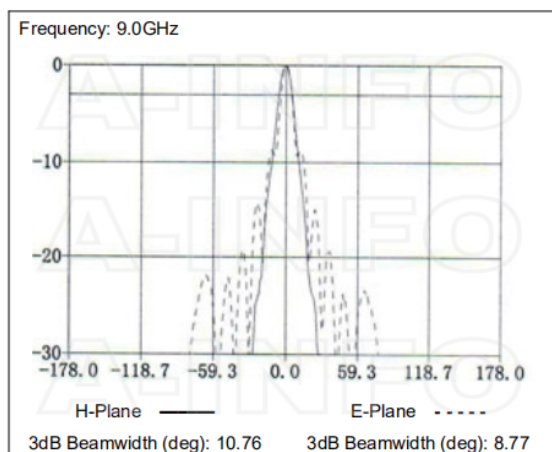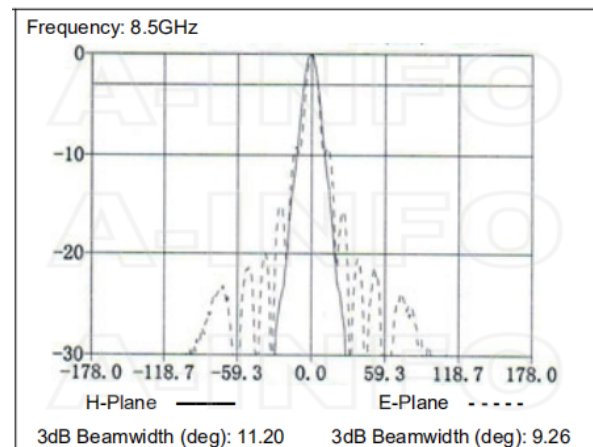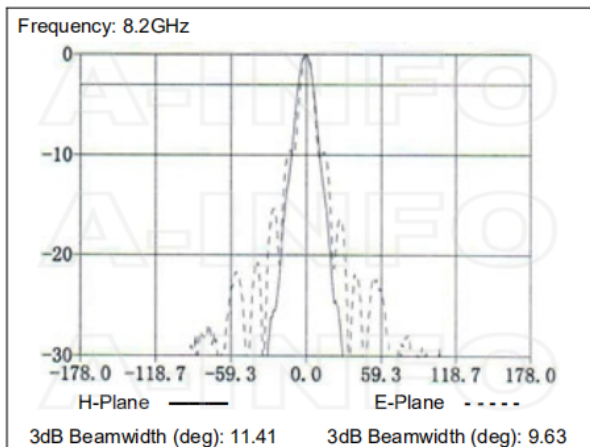

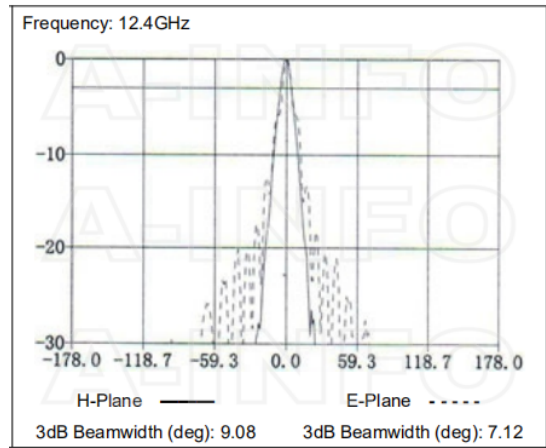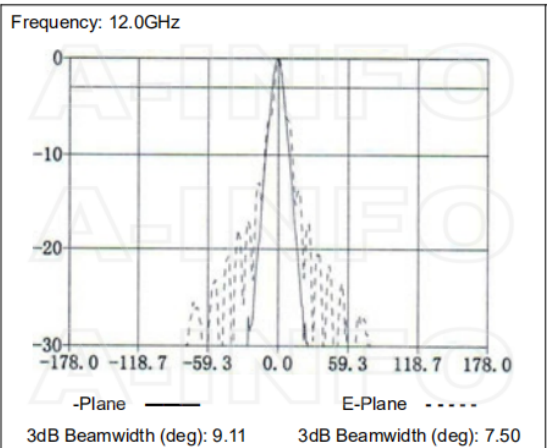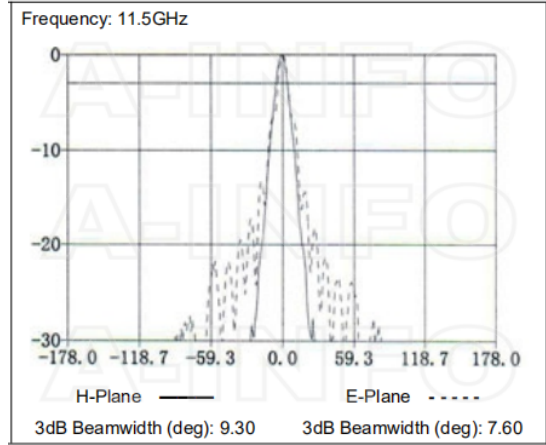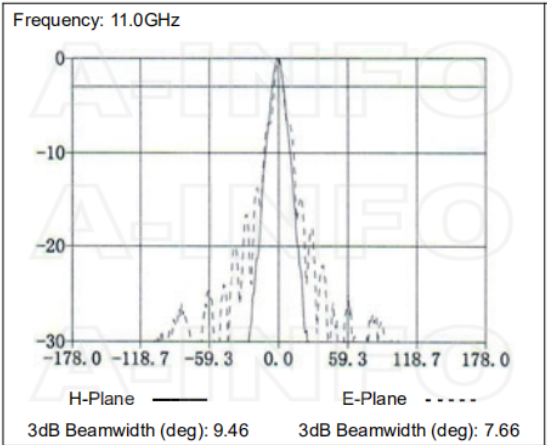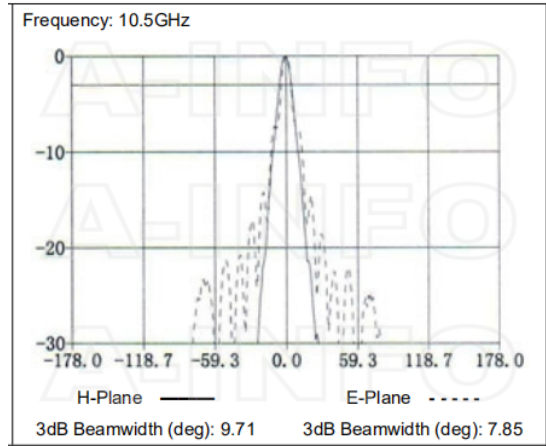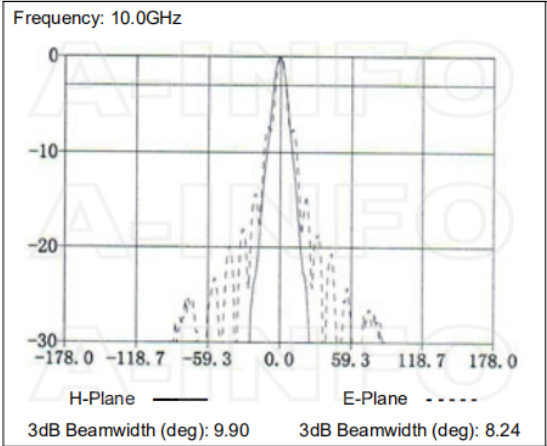

Related Products



90WCAN Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to N Type Female



90WCANM Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to N Type Male



90WCAS Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to SMA Female



90WCASM Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to SMA Male



90WCAT Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to TNC Female



90WCATM Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to TNC Male



90WCA7 Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to 7mm



90WCA3.5 Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to 3.5mm Female



90WCA3.5M Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to 3.5mm Male



90WCAK Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to 2.92mm Female



90WCAKM Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to 2.92mm Male



90WCA2.4 Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to 2.4mm Female



90WCA2.4M Right Angle Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to 2.4mm Male



90WECAN Endlaunch Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to N Type Female



90WECANM Endlaunch Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to N Type Male



90WECAS Endlaunch Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to SMA Female



90WECASM Endlaunch Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to SMA Male



90WECAM Endlaunch Rectangular Waveguide to Coaxial Adapter 8.2-12.4GHz WR90 to 2.92mm Female



LB-90-25-MB2 Round Type Mounting Bracket



LB-90-25-L2 L Type Mounting Bracket



Tripod_15Kg Al Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod Metalfree



M4x18 Hex_Pack WR112- WR51 Flange Assembly Pack

Similar Products



LB-90-25-A2 Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain Rectangular Waveguide Interface



LB-90-25-C2-SF Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain SMA Female



LB-90-25-C2-SFSPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain SMA Female



LB-90-25-C2-NF Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain N Type Female



LB-90-25-C2-NFSPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain N Type Female



LB-90-25-C2-TF Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain TNC Female



LB-90-25-C2-TFSPO Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain TNC Female



LB-90-25-C2-7 Standard Gain Horn Antenna 8.2-12.4GHz 25dB Gain 7mm



LB-90-25-C2-7SPO Standard Gain
Horn Antenna 8.2-12.4GHz 25dB
Gain 7mm



LB-90-25-C2-3.5F Standard Gain
Horn Antenna 8.2-12.4GHz 25dB
Gain 3.5mm Female



LB-90-25-C2-3.5FSPO Standard
Gain Horn Antenna 8.2-12.4GHz
25dB Gain 3.5mm Female

About this Datasheet

● Product Information Product Link: https://www.ainfoinc.com/lb-90-25-a2spo-standard-gain-horn-antenna-8-2-12-4-ghz-25db-gain-fbp100 Data subject to change without notice. © A-INFO INC. 2023. All Rights Reserved	● Contact Us Address:dd 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com	● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
---	--	---