

QAGS SSMP to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~26.5GHz
DC~18GHz (bulk head)
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical

RF Connectors: SSMP
SMA
Outer Conductor: Passivated Stainless Steel or
Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+125°C


How To Order

QAGS-FF - SSMP(f) to SMA(f), Outline A


QAGSH-FF - SSMP(f) to SMA(f), bulk head, Outline B

Customization is available upon request.

Outline Drawings



Outline A

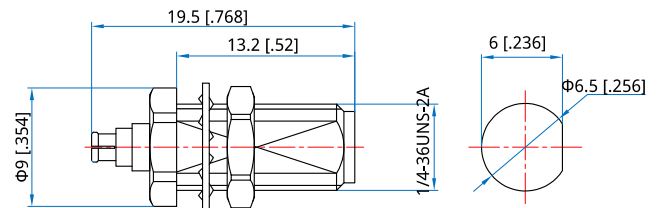

Outline B

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]