

QAST SMA to TNC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

| | |
|-------------------|------------|
| Frequency: | 0.01~18GHz |
| VSWR: | 1.2max. |
| VSWR (bulk head): | 1.25max. |
| Impedance: | 50Ω |

Mechanical

| | |
|------------------|---|
| RF Connectors: | SMA TNC |
| Outer Conductor: | Passivated stainless steel Passivated SUS303 stainless steel.(bulk head) |
| Dielectric: | PEI&PTFE PTFE(QAST-MF/QAST-FF) |
| Inner Conductor: | Gold plated beryllium copper |

Environmental


| | |
|--------------|-----------|
| Temperature: | -50~+85°C |
|--------------|-----------|

How To Order

- QAST-MM** - SMA (m) to TNC (m), Outline A
- QAST-MF** - SMA (m) to TNC (f), Outline B
- QAST-FM** - SMA (f) to TNC (m), Outline C
- QAST-FF** - SMA (f) to TNC (f), Outline D
- QASTL-FF** - SMA (f) to TNC (f), flange mount, Outline E

Customization is available upon request.

Outline Drawings

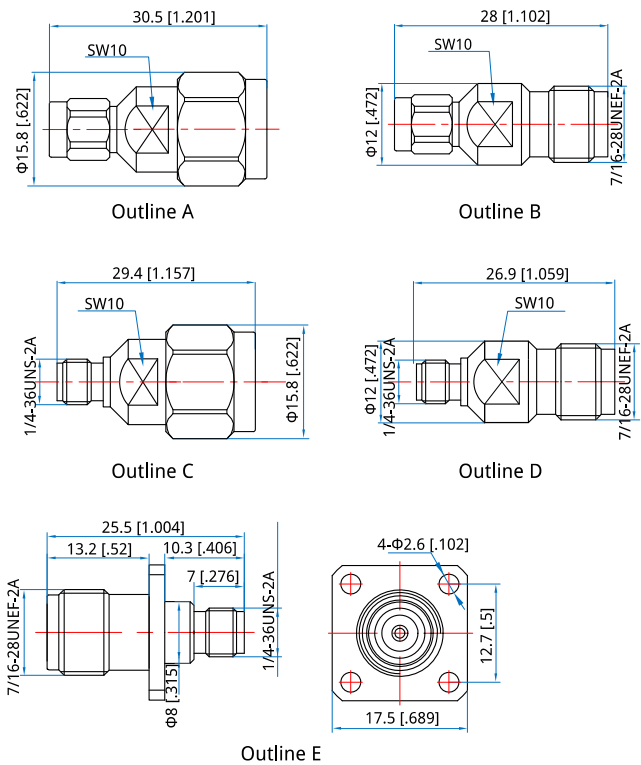

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]