

R&S®ZNBT VECTOR NETWORK ANALYZER



Specifications

Data Sheet
Version 09.00



ROHDE & SCHWARZ

Make ideas real



CONTENTS

Definitions	3
Measurement range	4
Measurement speed.....	6
Measurement accuracy of the R&S®ZNBT8.....	9
Measurement accuracy of the R&S®ZNBT20.....	10
Measurement accuracy of the R&S®ZNBT26 and R&S®ZNBT40.....	11
Effective system data	13
Factory-calibrated system data	15
Test port output.....	17
Test port input.....	21
Additional front panel connectors.....	22
Display	22
Rear panel connectors	23
Options	24
R&S®ZNBT-B4	24
R&S®ZNBT-B10	24
R&S®ZNBT-B12	24
R&S®ZNBT8/ZNBT20/ZNBT26/ZNBT40-B21/-B22/-B23/-B24/-B25/-B26	24
R&S®ZNBT-B81	25
R&S®ZNBT8-B108 to R&S®ZNBT8-B124, R&S®ZNBT20/ZNBT26/ZNBT40-B112 to R&S®ZNBT20/ZNBT26/ZNBT40-B124.....	25
R&S®ZNBT8-B504/-B508/-B512/-B516/-B520/-B524.....	25
R&S®ZNBT-Z14.....	26
General data	27
Dimensions (in mm).....	29
Ordering information	32

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

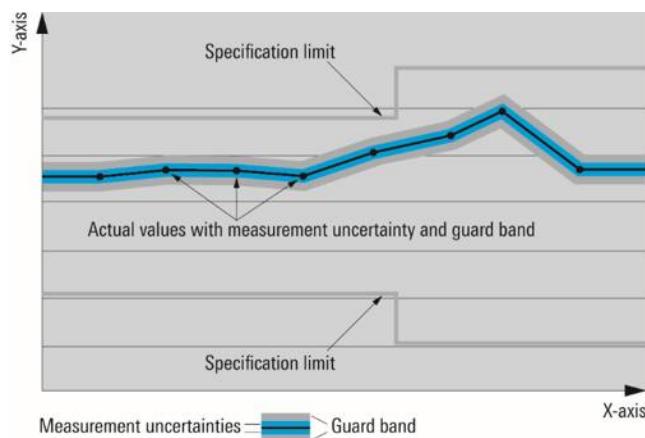

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under "Specifications with limits" above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Measurement range

Impedance		50 Ω
Test port connector	R&S®ZNBT8 R&S®ZNBT20 R&S®ZNBT26 R&S®ZNBT40	N female 3.5 mm, male, ruggedized 2.92 mm, male, ruggedized 2.92 mm, male, ruggedized
Number of test ports (the R&S®ZNBT8 supports simultaneous data acquisition at all test ports)	R&S®ZNBT8 base unit R&S®ZNBT20 base unit R&S®ZNBT26 base unit R&S®ZNBT40 base unit with R&S®ZNBT8-B108 option with option R&S®ZNBT8-B112 or R&S®ZNBT20-B112 or R&S®ZNBT26-B112 or R&S®ZNBT40-B112 with option R&S®ZNBT8-B116 or R&S®ZNBT20-B116 or R&S®ZNBT26-B116 or R&S®ZNBT40-B116 with option R&S®ZNBT8-B120 or R&S®ZNBT20-B120 or R&S®ZNBT26-B120 or R&S®ZNBT40-B120 with R&S®ZNBT8-B124 option or R&S®ZNBT20-B124 or R&S®ZNBT26-B124 or R&S®ZNBT40-B124	4 8 8 8 8 (additional ports 5 to 8) 12 (additional ports 9 to 12) 16 (additional ports 13 to 16) 20 (additional ports 17 to 20) 24 (additional ports 21 to 24)
Frequency range	R&S®ZNBT8 R&S®ZNBT20 R&S®ZNBT26 R&S®ZNBT40	9 kHz to 8.5 GHz 100 kHz to 20 GHz 100 kHz to 26.5 GHz 100 kHz to 40 GHz

Static frequency accuracy		(time since last adjustment × aging rate) + temperature drift + calibration accuracy
Aging per year	standard with R&S®ZNBT-B4 precision frequency reference option	$\pm 1 \times 10^{-6}$ $\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +40 °C)	standard with R&S®ZNBT-B4 precision frequency reference option	$\pm 1 \times 10^{-6}$ $\pm 1 \times 10^{-8}$
Achievable initial calibration accuracy	standard with R&S®ZNBT-B4 precision frequency reference option	$\pm 5 \times 10^{-7}$ $\pm 5 \times 10^{-8}$


Frequency resolution		1 Hz
Number of measurement points ¹	per trace	2 to 100001
Measurement bandwidth	1/1.5/2/3/5/7 steps without optional increased bandwidth with optional increased bandwidth	1 Hz to 1 MHz 1 Hz to 10 MHz

		Specification	Typical
Dynamic range ² of the R&S®ZNBT8 at all ports (without optional step attenuators)	9 kHz to 100 kHz 100 kHz to 50 MHz 50 MHz to 4 GHz 4 GHz to 7 GHz 7 GHz to 8.5 GHz	≥ 100 dB ≥ 120 dB ≥ 130 dB ≥ 125 dB ≥ 120 dB	122 dB 138 dB 140 dB 138 dB 130 dB



¹ The maximum number of sweep points may vary depending on the number of ports involved in the measurement.

² Dynamic range is defined as the difference between the actual maximum source power and the RMS value of the data trace of the transmission magnitude, which is produced by noise and crosstalk with the test ports short-circuited. The specification applies at 10 Hz measurement bandwidth, without system error correction. The dynamic range can be increased by using a measurement bandwidth of 1 Hz. Crosstalk does not limit the dynamic range.




Dynamic range ³ of the R&S®ZNBT20 at all ports	100 kHz to 1 MHz	≥ 105 dB	120 dB
	1 MHz to 10 MHz	≥ 110 dB	130 dB
	10 MHz to 100 MHz	≥ 120 dB	140 dB
	100 MHz to 6 GHz	≥ 125 dB	140 dB
	6 GHz to 20 GHz	≥ 120 dB	130 dB
Dynamic range ³ of the R&S®ZNBT26 at all ports	100 kHz to 1 MHz	≥ 105 dB	120 dB
	1 MHz to 10 MHz	≥ 110 dB	130 dB
	10 MHz to 5 GHz	≥ 120 dB	135 dB
	5 GHz to 10 GHz	≥ 115 dB	125 dB
	10 GHz to 26.5 GHz	≥ 110 dB	120 dB
Dynamic range ³ of the R&S®ZNBT40 at all ports	100 kHz to 1 MHz	≥ 105 dB	120 dB
	1 MHz to 10 MHz	≥ 110 dB	130 dB
	10 MHz to 5 GHz	≥ 120 dB	135 dB
	5 GHz to 10 GHz	≥ 115 dB	125 dB
	10 GHz to 30 GHz	≥ 110 dB	120 dB
	30 GHz to 35 GHz	≥ 105 dB	115 dB
	35 GHz to 38 GHz	≥ 100 dB	105 dB
	38 GHz to 40 GHz	≥ 95 dB	100 dB

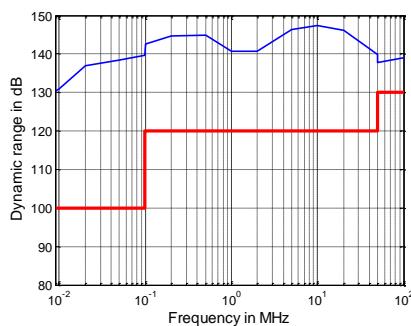

Dynamic range in dB versus frequency for the R&S®ZNBT8

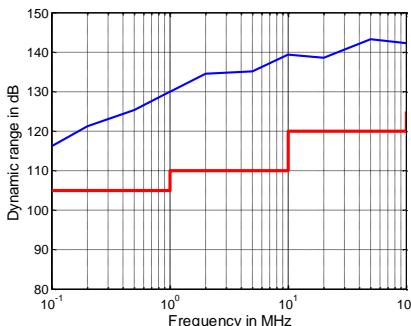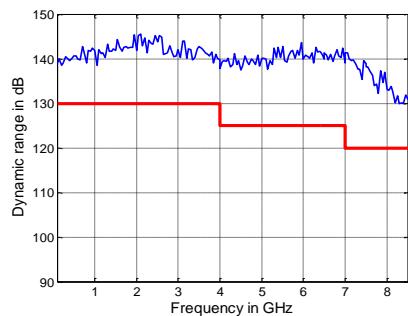

Dynamic range in dB versus frequency for the R&S®ZNBT20

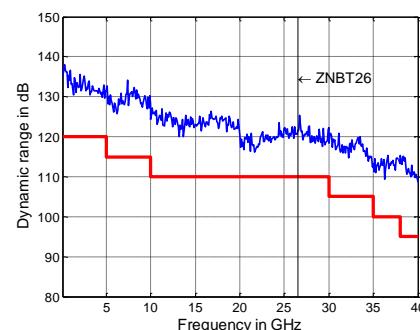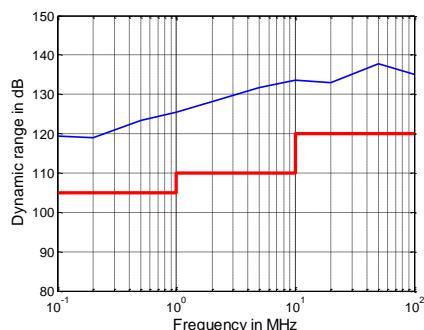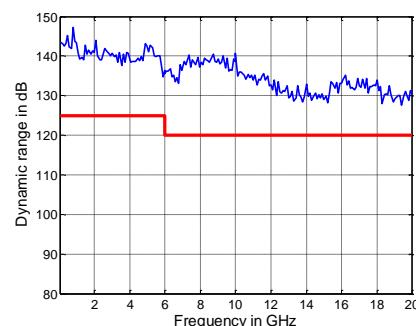


Dynamic range in dB versus frequency for the R&S®ZNBT26/R&S®ZNBT40

³ Below 100 MHz, dynamic range is typical between adjacent ports on the same horizontal level, e.g. between ports 1 and 2 or 5 and 6. Between 1.5 MHz and 2.5 MHz, dynamic range may be smaller than the specified value.

Measurement speed

Measured with firmware version 3.12 and Windows 10/64 bit.

Measurement time	for 201 measurements points, with 200 MHz span, 1 MHz measurement bandwidth		
	T_{SWEEP}	T_{CYCLE}	
R&S®ZNBT8			
with 900 MHz center frequency	< 2.5 ms	< 5 ms	
with 5.1 GHz center frequency	< 2.0 ms	< 5 ms	
R&S®ZNBT20			
with 900 MHz center frequency	< 3 ms	< 7.5 ms	
with 5.1 GHz center frequency	< 3.5 ms	< 7.5 ms	
R&S®ZNBT26			
with 900 MHz center frequency	< 3.5 ms	< 11 ms	
with 5.1 GHz center frequency	< 3.5 ms	< 7 ms	
R&S®ZNBT40			
with 900 MHz center frequency	< 3.5 ms	< 11 ms	
with 5.1 GHz center frequency	< 3.5 ms	< 7 ms	
Acquisition time per point (T_{ACQ})	1 MHz measurement bandwidth, CW mode	7.5 μ s	
Sampling time per point (T_{SAMPLE})	at 1 MHz measurement bandwidth	860 ns	
IF filter: normal	at 10 MHz measurement bandwidth	312 ns	
Time for measurement and data transfer (typical)	for 201 measurements points, with 800 MHz start frequency, 1 GHz stop frequency, 1 MHz measurement bandwidth ⁴	VXI11	HiSLIP
		over 1 Gbit/s LAN	IEC/IEEE
R&S®ZNBT8	4.8 ms	4.3 ms	5.1 ms
R&S®ZNBT20	6.9 ms	7.3 ms	7.5 ms
R&S®ZNBT26	6.7 ms	6.1 ms	7.1 ms
R&S®ZNBT40	6.7 ms	6.1 ms	7.1 ms
Data transfer time (typical)	for 201 measurements points (magnitude)	0.9 ms	1 ms
Switching time between channels or preloaded instrument settings	with a maximum of 2001 points	< 8 ms	

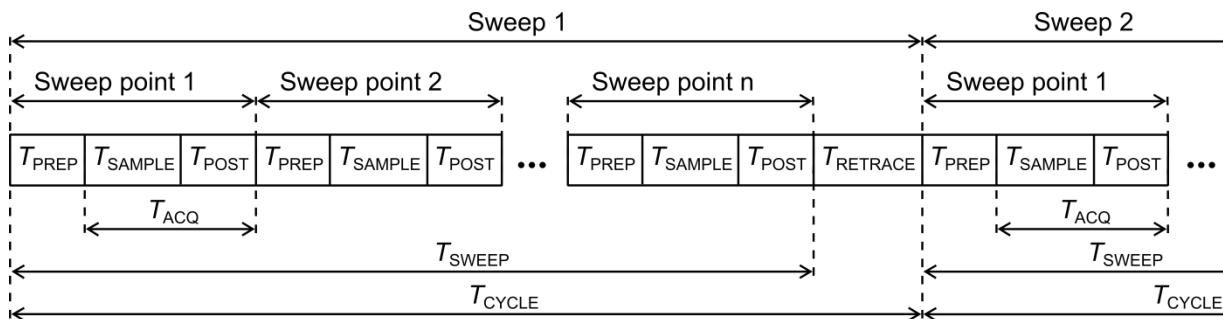

- T_{PREP} Preparation time required to set up the internal hardware components
- T_{SAMPLE} Sampling time (approximately equal to the settling time of the digital filters)
- T_{POST} Time required for hardware postprocessing
- T_{ACQ} Acquisition time ($T_{\text{SAMPLE}} + T_{\text{POST}}$)
- T_{SWEEP} Time required for one sweep
- T_{RETRACE} Time between two sweeps
- T_{CYCLE} Sweep cycle time ($T_{\text{SWEEP}} + T_{\text{RETRACE}}$)

Measurement data acquisition process

⁴ In continuous mode, no additional time for data transfer is needed, as this occurs simultaneously during the measurement.

Typical sweep times in ms versus number of measurement points ⁵ of the R&S®ZNBT8										
Number of measurement points	51		201		401		1601		5001	
Sweep mode (stepped, swept)	swept	step	swept	step	swept	step	swept	step	swept	step
800 MHz start frequency, 1 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	1.3	1.8	2.1	4.1	3.1	4.9	8	11.4	22.8	33
With 4-port TOSM calibration	3.3	5	6.3	13.6	10.2	18	31	45	89	133
With 24-port TOSM calibration	20.6	33	66	101	120	142	468	509	1463	1601
800 MHz start frequency, 1 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	47	47	181	181	360	360	1382	1382	4314	4315
With 4-port TOSM calibration	185	185	722	722	1437	1437	5526	5525	17251	17252
With 24-port TOSM calibration	1107	1107	4330	4330	8624	8623	33192	33194	103798	103798
1 MHz start frequency, 4.5 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	3	3	5.3	5.3	4.9	8	10.6	23.8	25.3	64
With 4-port TOSM calibration	10.1	10.1	19.6	19.5	17.6	31	39	93	99	254
With 24-port TOSM calibration	62	63	132	132	138	215	475	722	1493	2222
1 MHz start frequency, 4.5 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	50	50	183	183	360	360	1420	1421	4422	4423
With 4-port TOSM calibration	197	197	727	729	1435	1437	5676	5679	17683	17686
With 24-port TOSM calibration	1179	1182	4363	4376	8613	8625	34100	34115	106444	106459
1 MHz start frequency, 8.5 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	3.3	3.3	5.7	5.6	8.5	8.5	11.3	23.7	25.9	65
With 4-port TOSM calibration	11.2	11.1	20.7	20.7	32	32	44	93	103	257
With 24-port TOSM calibration	69	70	139	139	221	225	471	722	1484	2242
1 MHz start frequency, 8.5 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	52	51	184	185	361	361	1420	1420	4416	4416
With 4-port TOSM calibration	203	203	733	736	1440	1443	5674	5679	17656	17660
With 24-port TOSM calibration	1214	1215	4400	4417	8637	8660	34090	34115	106283	106311
Typical sweep times in ms versus number of measurement points ⁵ of the R&S®ZNBT20										
Number of measurement points	51		201		401		1601		5001	
Sweep mode (stepped, swept)	swept	step	swept	step	swept	step	swept	step	swept	step
9 GHz start frequency, 10 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	2.9	3.0	3.5	4.7	4.6	6.9	9.6	16.6	24.3	38
With 4-port TOSM calibration	8.0	8.0	10.4	15.1	14.3	24.1	35	63	94	183
With 24-port TOSM calibration	47	48	79	104	131	177	474	585	1481	1827
9 GHz start frequency, 10 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	47	48	179	179	354	354	1403	1403	4327	4327
With 4-port TOSM calibration	185	185	709	710	1409	1409	5608	5608	17302	17301
With 24-port TOSM calibration	1101	1105	4253	4256	8454	8456	33683	33686	104106	104112
1 MHz start frequency, 20 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	10.2	10	13.6	13.5	16.6	16.4	30	30	39	68
With 4-port TOSM calibration	36	36	50	50	62	62	117	117	149	268
With 24-port TOSM calibration	222	223	324	323	411	416	902	913	1514	2532
1 MHz start frequency, 20 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	58	58	193	194	369	370	1420	1421	4394	4396
With 4-port TOSM calibration	227	227	766	769	1471	1475	5673	5679	17568	17574
With 24-port TOSM calibration	1359	1363	4604	4626	8839	8867	34104	34142	105871	105913

⁵ Sweep time is to be understood as cycle time; static frequency accuracy of the instrument applies; measured with controller LPW11.

Typical sweep times in ms versus number of measurement points ⁵ of the R&S®ZNBT26										
Number of measurement points	51		201		401		1601		5001	
Sweep mode (stepped, swept)	swept	step	swept	step	swept	step	swept	step	swept	step
9 GHz start frequency, 10 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	2.9	2.9	3.9	4.7	4.6	6.9	9.6	16.6	24.2	38
With 4-port TOSM calibration	8	8	11.2	15.1	14.3	24	35	63	95	182
With 24-port TOSM calibration	46	47	80	103	141	174	551	580	1474	1808
9 GHz start frequency, 10 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	49	48	179	179	354	354	1403	1403	4328	4327
With 4-port TOSM calibration	185	185	709	710	1409	1409	5608	5607	17301	17302
With 24-port TOSM calibration	1103	1104	4252	4257	8452	8457	33680	33685	104101	104104
1 MHz start frequency, 26.5 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	15.4	16.1	21.2	21.2	24.9	24.9	40	40	53	77
With 4-port TOSM calibration	58	58	81	81	96	96	154	154	205	305
With 24-port TOSM calibration	351	351	507	506	609	616	1118	1132	1698	2763
1 MHz start frequency, 26.5 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	59	60	195	196	372	373	1423	1425	4397	4400
With 4-port TOSM calibration	232	233	775	779	1481	1487	5688	5695	17581	17591
With 24-port TOSM calibration	1392	1396	4658	4682	8903	8939	34191	34243	105956	106012



Typical sweep times in ms versus number of measurement points ⁵ of the R&S®ZNBT40										
Number of measurement points	51		201		401		1601		5001	
Sweep mode (stepped, swept)	swept	step	swept	step	swept	step	swept	step	swept	step
9 GHz start frequency, 10 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	2.9	2.9	3.9	4.7	4.6	6.9	9.6	16.6	24.2	38
With 4-port TOSM calibration	8	8	11.2	15.1	14.3	24	35	63	95	182
With 24-port TOSM calibration	46	47	80	103	141	174	551	580	1474	1808
9 GHz start frequency, 10 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	49	48	179	179	354	354	1403	1403	4328	4327
With 4-port TOSM calibration	185	185	709	710	1409	1409	5608	5607	17301	17302
With 24-port TOSM calibration	1103	1104	4252	4257	8452	8457	33680	33685	104101	104104
1 MHz start frequency, 40 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth										
With correction switched off	15.4	16.1	21.2	21.2	24.9	24.9	40	40	53	77
With 4-port TOSM calibration	58	58	81	81	96	96	154	154	205	305
With 24-port TOSM calibration	351	351	507	506	609	616	1118	1132	1698	2763
1 MHz start frequency, 40 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth										
With correction switched off	59	60	195	196	372	373	1423	1425	4397	4400
With 4-port TOSM calibration	232	233	775	779	1481	1487	5688	5695	17581	17591
With 24-port TOSM calibration	1392	1396	4658	4682	8903	8939	34191	34243	105956	106012

Measurement accuracy of the R&S®ZNBT8

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S®ZV-Z270 calibration kit. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed). At limit branches the tighter value is applicable.

Uncertainty of transmission measurements		Magnitude	Phase
> 9 kHz to 100 kHz	+0 dB to -35 dB	0.07 dB	0.6°
	-35 dB to -50 dB	0.12 dB	1.0°
	-50 dB to -60 dB	0.32 dB	2.3°
> 100 kHz to 8.5 GHz	+0 dB to -35 dB	0.06 dB	0.6°
	-35 dB to -50 dB	0.09 dB	0.9°
	-50 dB to -60 dB	0.19 dB	1.5°



Specifications are based on a matched DUT, a measurement bandwidth of 10 Hz and a nominal source power of -10 dBm.

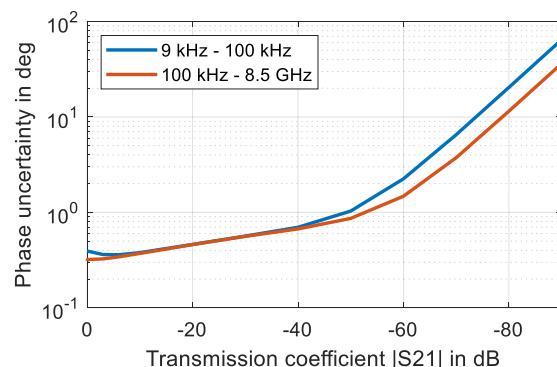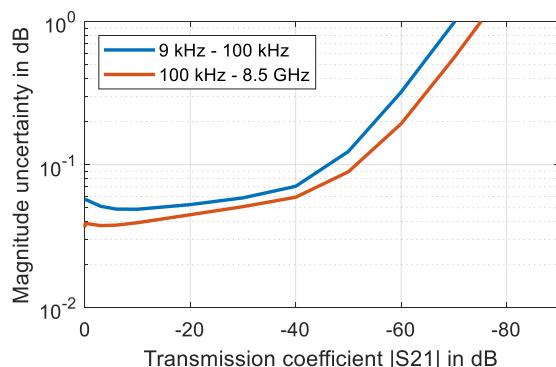

Uncertainty of transmission magnitude and transmission phase measurements for the R&S®ZNBT8 in the frequency range from 9 kHz to 8.5 GHz; analysis conditions: $S_{11} = S_{22} = 0$, cal. power -10 dBm, meas. power -10 dBm

Uncertainty of reflection measurements	Logarithmic			Linear	
	Reflection level	Magnitude	Phase	Reflection range	Magnitude
9 kHz to 2 GHz	0 dB	0.1 dB	0.6°	0 dB to -15 dB	0.010
	-15 dB	0.2 dB	1.5°	-15 dB to -25 dB	0.005
	-25 dB	0.7 dB	5.6°	-25 dB to -35 dB	0.005
> 2 GHz to 8.5 GHz	0 dB	0.1 dB	0.9°	0 dB to -15 dB	0.015
	-15 dB	0.3 dB	2.0°	-15 dB to -25 dB	0.007
	-25 dB	1.0 dB	7.5°	-25 dB	0.007

Specifications are based on an isolating DUT, a measurement bandwidth of 10 Hz and a nominal source power of -10 dBm.

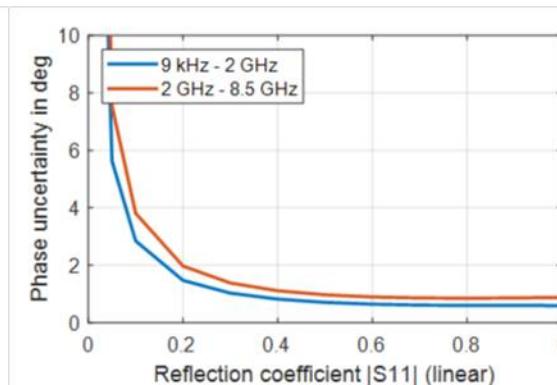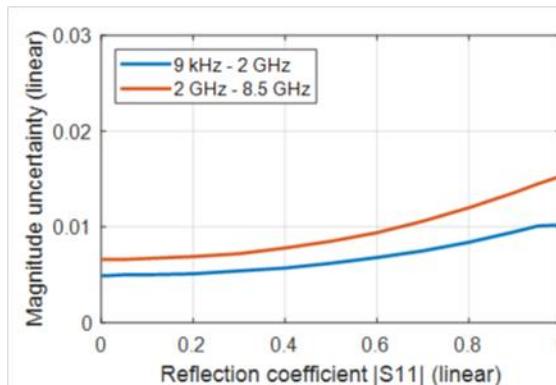



Uncertainty of reflection magnitude and reflection phase measurements for the R&S®ZNBT8 in the frequency range from 9 kHz to 8.5 GHz; analysis conditions: $S_{12} = S_{21} = 0$, cal. power -10 dBm, meas. power -10 dBm

Measurement accuracy of the R&S®ZNBT20

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S®ZV-Z235 calibration kit. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed).

Uncertainty of transmission measurements		Magnitude	Phase
100 kHz to 1 MHz	+0 dB to -35 dB	0.09 dB	0.7°
	-35 dB to -50 dB	0.32 dB	2.2°
	-50 dB to -60 dB	0.98 dB	6.5°
> 1 MHz to 10 GHz	+0 dB to -35 dB	0.07 dB	0.7°
	-35 dB to -50 dB	0.19 dB	1.4°
	-50 dB to -60 dB	0.56 dB	3.7°
> 10 GHz to 20 GHz	+0 dB to -35 dB	0.07 dB	0.8°
	-35 dB to -50 dB	0.09 dB	1.0°
	-50 dB to -60 dB	0.20 dB	1.6°



Specifications are based on a matched DUT, a measurement bandwidth of 10 Hz and a nominal source power of -10 dBm.

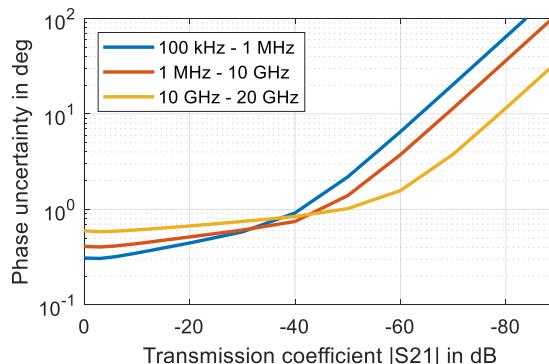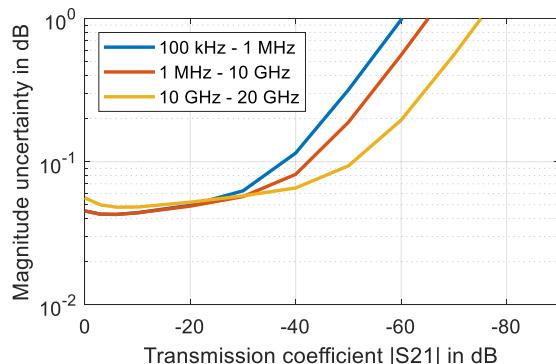

Uncertainty of transmission magnitude and transmission phase measurements for the R&S®ZNBT20 in the frequency range from 100 kHz to 20 GHz; analysis conditions: $S_{11} = S_{22} = 0$, cal. power -10 dBm, meas. power -10 dBm

Uncertainty of reflection measurements	Logarithmic			Linear	
	Reflection level	Magnitude	Phase	Reflection range	Magnitude
100 kHz to 10 GHz	0 dB	0.10 dB	0.7°	0 dB to -15 dB	0.013
	-15 dB	0.30 dB	2.0°	-15 dB to -25 dB	0.007
	-25 dB	1.00 dB	7.7°	-25 dB to -35 dB	0.007
> 10 GHz to 20 GHz	0 dB	0.20 dB	1.1°	0 dB to -15 dB	0.019
	-15 dB	0.40 dB	2.4°	-15 dB to -25 dB	0.008
	-25 dB	1.20 dB	9.1°	-25 dB to -35 dB	0.008

Specifications are based on an isolating DUT, a measurement bandwidth of 10 Hz and a nominal source power of -10 dBm.

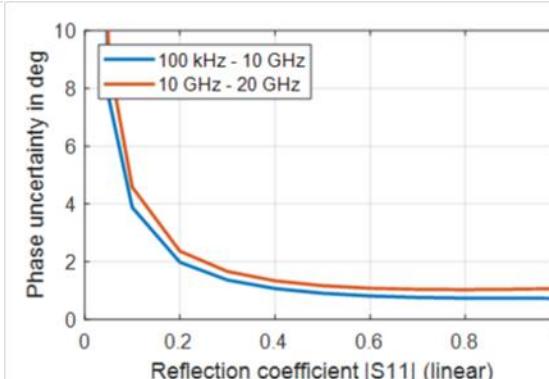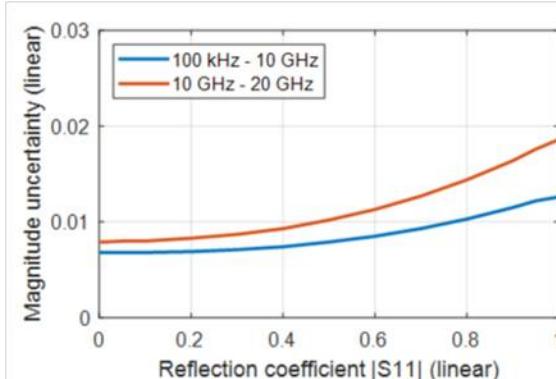



Uncertainty of reflection magnitude and reflection phase measurements for the R&S®ZNBT20 in the frequency range from 100 kHz to 20 GHz; analysis conditions: $S_{12} = S_{21} = 0$, cal. power -10 dBm, meas. power -10 dBm

Measurement accuracy of the R&S®ZNBT26 and R&S®ZNBT40

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S®ZV-Z229 calibration kit. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed).

Uncertainty of transmission measurements		Magnitude	Phase
100 kHz to 200 MHz	0 dB to -35 dB	0.06 dB	0.6°
	-35 dB to -50 dB	0.09 dB	0.9°
	-50 dB to -60 dB	0.19 dB	1.5°
> 200 MHz to 10 GHz	0 dB to -35 dB	0.06 dB	0.7°
	-35 dB to -50 dB	0.10 dB	1.0°
	-50 dB to -60 dB	0.23 dB	1.7°
> 10 GHz to 20 GHz	0 dB to -35 dB	0.06 dB	0.8°
	-35 dB to -50 dB	0.10 dB	1.1°
	-50 dB to -60 dB	0.24 dB	1.8°
> 20 GHz to 35 GHz	0 dB to -35 dB	0.07 dB	1.2°
	-35 dB to -50 dB	0.13 dB	1.5°
	-50 dB to -60 dB	0.32 dB	2.5°
> 35 GHz to 40 GHz	0 dB to -35 dB	0.10 dB	1.3°
	-35 dB to -50 dB	0.32 dB	2.5°
	-50 dB to -60 dB	0.98 dB	6.6°



Specifications are based on a matched DUT, a measurement bandwidth of 10 Hz and a nominal source power of -10 dBm.

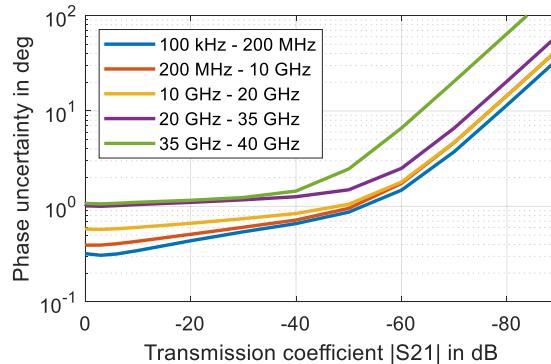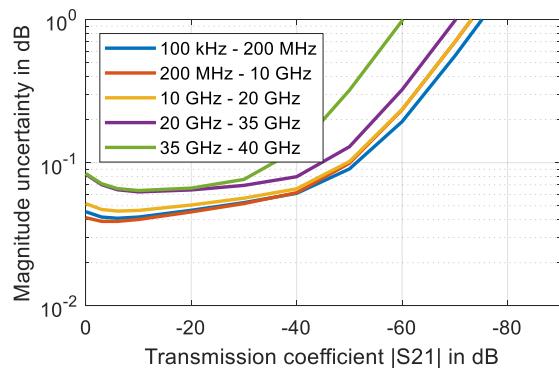

Uncertainty of transmission magnitude and transmission phase measurements for the R&S®ZNBT26 and R&S®ZNBT40 in the frequency range from 100 kHz to 40 GHz; analysis conditions: $S_{11} = S_{22} = 0$, cal. power -10 dBm, meas. power -10 dBm

Uncertainty of reflection measurements	Logarithmic			Linear	
	Reflection level	Magnitude	Phase	Reflection range	Magnitude (lin)
100 kHz to 10 GHz	0 dB	0.10 dB	0.7°	0 dB to -15 dB	0.012
	-15 dB	0.29 dB	1.7°	-15 dB to -25 dB	0.006
	-25 dB	0.88 dB	6.6°	-25 dB to -35 dB	0.006
> 10 GHz to 20 GHz	0 dB	0.17 dB	1.1°	0 dB to -15 dB	0.020
	-15 dB	0.48 dB	2.7°	-15 dB to -25 dB	0.010
	-25 dB	1.29 dB	11°	-25 dB to -35 dB	0.009
> 20 GHz to 40 GHz	0 dB	0.24 dB	1.6°	0 dB to -15 dB	0.028
	-15 dB	0.61 dB	3.7°	-15 dB to -25 dB	0.013
	-25 dB	1.81 dB	14°	-25 dB to -35 dB	0.013

Specifications are based on an isolating DUT, a measurement bandwidth of 10 Hz and a nominal source power of -10 dBm.

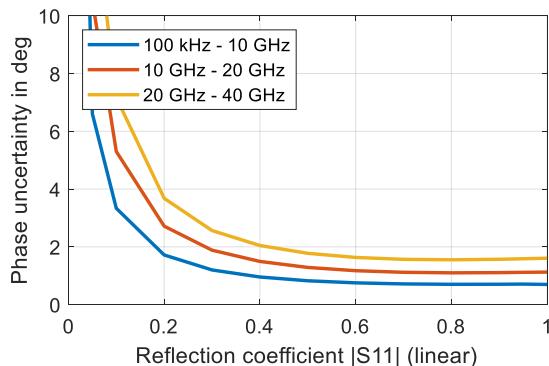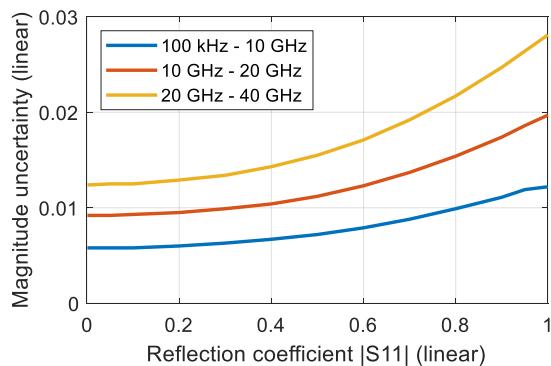

Uncertainty of reflection magnitude and reflection phase measurements for the R&S®ZNBT26 and R&S®ZNBT40 in the frequency range from 100 kHz to 40 GHz; analysis conditions: $S_{11} = S_{22} = 0$, cal. power -10 dBm, meas. power -10 dBm

Effective system data

This data are valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 K since calibration. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed). The data are based on a measurement bandwidth of 10 Hz.

R&S®ZNBT8 calibrated using R&S®ZV-Z270		10 MHz to 700 MHz	700 MHz to 8.5 GHz
Directivity	≥ 36 dB	≥ 40 dB	
Source match	≥ 30 dB	≥ 36 dB	
Load match	≥ 36 dB	≥ 40 dB	
Reflection tracking	≤ 0.2 dB	≤ 0.1 dB	
Transmission tracking	≤ 0.2 dB	≤ 0.1 dB	

For a R&S®ZV-Z270 calibration kit that has been characterized with a DAkkS-accredited calibration, the following data is valid:

R&S®ZNBT8 calibrated using R&S®ZV-Z270		9 kHz to 100 kHz	100 kHz to 4.5 GHz	4.5 GHz to 8.5 GHz
Directivity	≥ 46 dB	≥ 45 dB	≥ 40 dB	
Source match	≥ 41 dB	≥ 40 dB	≥ 36 dB	
Load match	≥ 44 dB	≥ 45 dB	≥ 40 dB	
Reflection tracking	≤ 0.02 dB	≤ 0.02 dB	≤ 0.05 dB	
Transmission tracking	≤ 0.028 dB	≤ 0.018 dB	≤ 0.09 dB	

R&S®ZNBT20 calibrated using R&S®ZV-Z235		10 MHz to 700 MHz	700 MHz to 20 GHz
Directivity	≥ 36 dB	≥ 40 dB	
Source match	≥ 30 dB	≥ 36 dB	
Load match	≥ 36 dB	≥ 40 dB	
Reflection tracking	≤ 0.2 dB	≤ 0.1 dB	
Transmission tracking	≤ 0.2 dB	≤ 0.1 dB	

For a R&S®ZV-Z235 calibration kit that has been characterized with a DAkkS-accredited calibration, the following data is valid:

		10 MHz to 10 GHz	10 GHz to 18 GHz	18 GHz to 20 GHz
Directivity	≥ 43 dB	≥ 41 dB	≥ 41 dB	
Source match	≥ 40 dB	≥ 37 dB	≥ 36 dB	
Load match	≥ 43 dB	≥ 41 dB	≥ 41 dB	
Reflection tracking	≤ 0.056 dB	≤ 0.083 dB	≤ 0.11 dB	
Transmission tracking	≤ 0.028 dB	≤ 0.038 dB	≤ 0.043 dB	

R&S®ZNBT26 calibrated using R&S®ZV-Z229		10 MHz to 700 MHz	700 MHz to 24 GHz	24 GHz to 26.5 GHz
Directivity	≥ 33 dB	≥ 38 dB	≥ 33 dB	
Source match	≥ 30 dB	≥ 36 dB	≥ 30 dB	
Load match	≥ 33 dB	≥ 38 dB	≥ 33 dB	
Reflection tracking	≤ 0.2 dB	≤ 0.1 dB	≤ 0.2 dB	
Transmission tracking	≤ 0.2 dB	≤ 0.1 dB	≤ 0.2 dB	

For a R&S®ZV-Z229 calibration kit that has been characterized with a DAkkS-accredited calibration, the following data is valid:


R&S®ZNBT26 calibrated using R&S®ZV-Z229		100 kHz to 4 GHz	4 GHz to 20 GHz	20 GHz to 26.5 GHz
Directivity	≥ 42 dB	≥ 38 dB	≥ 36 dB	
Source match	≥ 38 dB	≥ 35 dB	≥ 33 dB	
Load match	≥ 42 dB	≥ 38 dB	≥ 36 dB	
Reflection tracking	≤ 0.05 dB	≤ 0.05 dB	≤ 0.08 dB	
Transmission tracking	≤ 0.02 dB	≤ 0.03 dB	≤ 0.06 dB	

R&S®ZNBT40 calibrated using R&S®ZV-Z229	10 MHz to 700 MHz	700 MHz to 24 GHz	24 GHz to 40 GHz
Directivity	≥ 33 dB	≥ 38 dB	≥ 33 dB
Source match	≥ 30 dB	≥ 36 dB	≥ 30 dB
Load match	≥ 33 dB	≥ 38 dB	≥ 33 dB
Reflection tracking	≤ 0.2 dB	≤ 0.1 dB	≤ 0.2 dB
Transmission tracking	≤ 0.2 dB	≤ 0.1 dB	≤ 0.2 dB
For a R&S®ZV-Z229 calibration kit that has been characterized with a DAkkS-accredited calibration, the following data is valid:			
R&S®ZNBT40 calibrated using R&S®ZV-Z229	100 kHz to 4 GHz	4 GHz to 20 GHz	20 GHz to 40 GHz
Directivity	≥ 42 dB	≥ 38 dB	≥ 36 dB
Source match	≥ 38 dB	≥ 35 dB	≥ 33 dB
Load match	≥ 42 dB	≥ 38 dB	≥ 36 dB
Reflection tracking	≤ 0.05 dB	≤ 0.05 dB	≤ 0.08 dB
Transmission tracking	≤ 0.02 dB	≤ 0.03 dB	≤ 0.06 dB




Factory-calibrated system data

Data are valid between +18 °C and +28 °C. Data are based on a source power of –10 dBm and a measurement bandwidth of 1 kHz.

		Specification	Typical
Directivity	9 kHz to 50 kHz	≥ 20 dB	35 dB
	50 kHz to 10 GHz	≥ 30 dB	50 dB
	10 GHz to 20 GHz	≥ 25 dB	35 dB
	20 GHz to 35 GHz	≥ 20 dB	35 dB
	35 GHz to 40 GHz	≥ 15 dB	30 dB
Source match	9 kHz to 50 kHz	≥ 20 dB	35 dB
	50 kHz to 10 GHz	≥ 30 dB	50 dB
	10 GHz to 20 GHz	≥ 25 dB	35 dB
	20 GHz to 35 GHz	≥ 20 dB	35 dB
	35 GHz to 40 GHz	≥ 15 dB	30 dB
Reflection tracking	9 kHz to 40 GHz	≤ 0.5 dB	0.1 dB
Transmission tracking	9 kHz to 40 GHz	≤ 0.5 dB ⁶	0.1 dB
Load match			
Load match of the R&S®ZNBT8	9 kHz to 50 kHz	≥ 10 dB	15 dB
	50 kHz to 8.5 GHz	≥ 20 dB	25 dB
Load match of the R&S®ZNBT20	100 kHz to 300 kHz	≥ 12 dB	15 dB
	300 kHz to 10 MHz	≥ 15 dB	18 dB
	10 MHz to 20 GHz	≥ 16 dB	20 dB
Load match of the R&S®ZNBT26	100 kHz to 300 kHz	≥ 12 dB	15 dB
	300 kHz to 10 MHz	≥ 15 dB	18 dB
	10 MHz to 20 GHz	≥ 18 dB	22 dB
	20 GHz to 26.5 GHz	≥ 14 dB	18 dB
Load match of the R&S®ZNBT40	100 kHz to 300 kHz	≥ 12 dB	15 dB
	300 kHz to 10 MHz	≥ 15 dB	18 dB
	10 MHz to 20 GHz	≥ 18 dB	22 dB
	20 GHz to 40 GHz	≥ 14 dB	18 dB

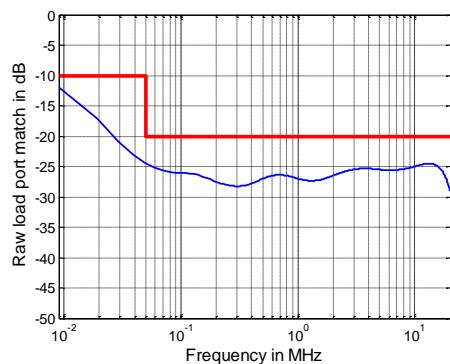


Raw load port match versus frequency for the R&S®ZNBT8

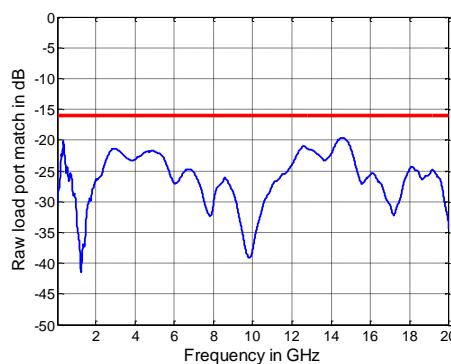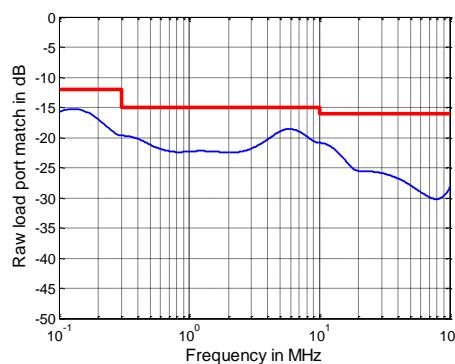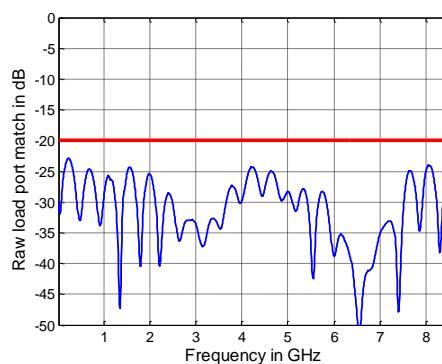

Raw load port match versus frequency for the R&S®ZNBT20

⁶ Below 200 kHz, factory-calibrated transmission tracking of the R&S®ZNBT20, R&S®ZNBT26 and R&S®ZNBT40 is ≤ 0.7 dB.

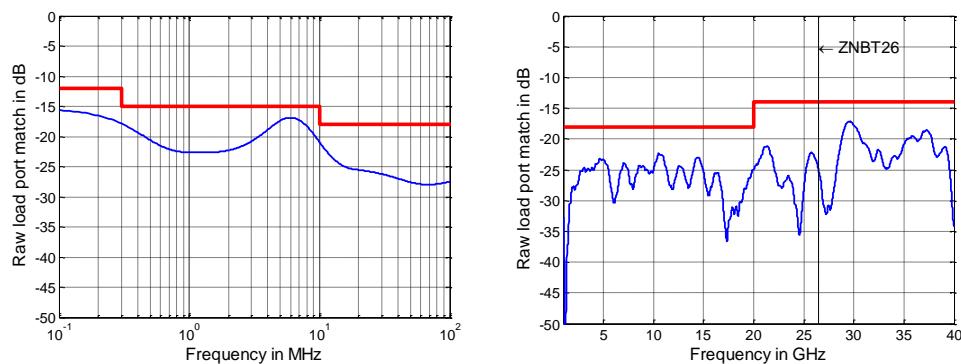

Raw load port match versus frequency for the R&S®ZNBT26/R&S®ZNBT40

Trace stability				
	at 0 dBm source power, 0 dB reflection	IF bandwidth	Specification	Typical
Trace noise magnitude (RMS) of the R&S®ZNBT8	100 kHz to 100 MHz	10 kHz	≤ 0.004 dB	0.001 dB
	100 MHz to 8.5 GHz	10 kHz	≤ 0.004 dB	0.002 dB
Trace noise magnitude (RMS) of the R&S®ZNBT20	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	≤ 0.008 dB	0.002 dB
Trace noise magnitude (RMS) of the R&S®ZNBT26	300 kHz to 20 GHz	10 kHz	≤ 0.004 dB	0.001 dB
	100 kHz to 300 kHz	10 kHz	≤ 0.008 dB	0.002 dB
	300 kHz to 20 GHz	10 kHz	≤ 0.004 dB	0.002 dB
	20 GHz to 26.5 GHz	10 kHz	≤ 0.006 dB	0.003 dB
Trace noise magnitude (RMS) of the R&S®ZNBT40	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	≤ 0.008 dB	0.002 dB
	300 kHz to 20 GHz	10 kHz	≤ 0.004 dB	0.002 dB
	20 GHz to 35 GHz	10 kHz	≤ 0.006 dB	0.003 dB
	35 GHz to 40 GHz	10 kHz	≤ 0.008 dB	0.005 dB
Trace noise phase (RMS) of the R&S®ZNBT8	at 0 dBm source power, 0 dB reflection			
	100 kHz to 100 MHz	10 kHz	≤ 0.035°	0.005°
	100 MHz to 8.5 GHz	10 kHz	≤ 0.035°	0.020°
Trace noise phase (RMS) of the R&S®ZNBT20	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	≤ 0.070°	0.02°
	300 kHz to 20 GHz	10 kHz	≤ 0.035°	0.01°
Trace noise phase (RMS) of the R&S®ZNBT26	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	≤ 0.07°	0.02°
	300 kHz to 20 GHz	10 kHz	≤ 0.035°	0.015°
	20 GHz to 26.5 GHz	10 kHz	≤ 0.05°	0.02°
Trace noise phase (RMS) of the R&S®ZNBT40	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	≤ 0.07°	0.02°
	300 kHz to 20 GHz	10 kHz	≤ 0.035°	0.015°
	20 GHz to 35 GHz	10 kHz	≤ 0.05°	0.02°
	35 GHz to 40 GHz	10 kHz	≤ 0.08°	0.04°
Temperature dependence	at 0 dB transmission or reflection			
	9 kHz to 4.5 GHz	magnitude		0.01 dB/K
		phase		0.15 °/K
	4.5 GHz to 20 GHz	magnitude		0.04 dB/K
		phase		0.80 °/K
	20 GHz to 40 GHz	magnitude		0.08 dB/K
		phase		1.60 °/K

⁷ Between 1.5 MHz and 2.5 MHz, trace noise magnitude may exceed the specified value.



Test port output

Data are valid from +18 °C to +28 °C.



		Specification	Typical
Power range of the R&S®ZNBT8	without R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	9 kHz to 100 MHz	-55 dBm to +10 dBm	up to +12 dBm
	100 MHz to 2.5 GHz	-55 dBm to +13 dBm	up to +15 dBm
	2.5 GHz to 7.5 GHz	-55 dBm to +10 dBm	up to +13 dBm
	7.5 GHz to 8.5 GHz	-55 dBm to +8 dBm	up to +12 dBm
	with R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	9 kHz to 100 MHz	-85 dBm to +10 dBm	up to +12 dBm
	100 MHz to 2.5 GHz	-85 dBm to +13 dBm	up to +15 dBm
	2.5 GHz to 7.5 GHz	-85 dBm to +10 dBm	up to +13 dBm
	7.5 GHz to 8.5 GHz	-85 dBm to +8 dBm	up to +12 dBm
Power range of the R&S®ZNBT20	without R&S®ZNBT20-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	100 kHz to 1 MHz	-30 dBm to +8 dBm	up to +13 dBm
	1 MHz to 10 MHz	-30 dBm to +10 dBm	up to +15 dBm
	10 MHz to 5 GHz	-30 dBm to +12 dBm	up to +14 dBm
	5 GHz to 10 GHz	-30 dBm to +10 dBm	up to +12 dBm
	10 GHz to 20 GHz	-30 dBm to +8 dBm	up to +10 dBm
	with R&S®ZNBT20-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	100 kHz to 1 MHz	-60 dBm to +8 dBm	up to +13 dBm
	1 MHz to 10 MHz	-60 dBm to +10 dBm	up to +15 dBm
	10 MHz to 5 GHz	-60 dBm to +12 dBm	up to +14 dBm
	5 GHz to 10 GHz	-60 dBm to +10 dBm	up to +12 dBm
	10 GHz to 20 GHz	-60 dBm to +8 dBm	up to +10 dBm
Power range of the R&S®ZNBT26	without R&S®ZNBT26-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	100 kHz to 200 kHz	-30 dBm to +7 dBm	up to +10 dBm
	200 kHz to 1 GHz	-30 dBm to +8 dBm	up to +11 dBm
	1 GHz to 10 GHz	-30 dBm to +7 dBm	up to +10 dBm
	10 GHz to 15 GHz	-30 dBm to +6 dBm	up to +8 dBm
	15 GHz to 20 GHz	-30 dBm to +5 dBm	up to +7 dBm
	20 GHz to 26.5 GHz	-30 dBm to +2 dBm	up to +5 dBm
	with R&S®ZNBT26-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	100 kHz to 200 kHz	-60 dBm to +7 dBm	up to +10 dBm
	200 kHz to 1 GHz	-60 dBm to +8 dBm	up to +11 dBm
	1 GHz to 10 GHz	-60 dBm to +7 dBm	up to +10 dBm
	10 GHz to 15 GHz	-60 dBm to +6 dBm	up to +8 dBm
	15 GHz to 20 GHz	-60 dBm to +5 dBm	up to +7 dBm
	20 GHz to 26.5 GHz	-60 dBm to +2 dBm	up to +5 dBm
Power range of the R&S®ZNBT40	without R&S®ZNBT40-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	100 kHz to 200 kHz	-30 dBm to +7 dBm	up to +10 dBm
	200 kHz to 1 GHz	-30 dBm to +8 dBm	up to +11 dBm
	1 GHz to 10 GHz	-30 dBm to +7 dBm	up to +10 dBm
	10 GHz to 15 GHz	-30 dBm to +6 dBm	up to +8 dBm
	15 GHz to 20 GHz	-30 dBm to +5 dBm	up to +7 dBm
	20 GHz to 30 GHz	-30 dBm to +2 dBm	up to +5 dBm
	30 GHz to 40 GHz	-30 dBm to 0 dBm	up to +4 dBm
	with R&S®ZNBT40-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	100 kHz to 200 kHz	-60 dBm to +7 dBm	up to +10 dBm
	200 kHz to 1 GHz	-60 dBm to +8 dBm	up to +11 dBm
	1 GHz to 10 GHz	-60 dBm to +7 dBm	up to +10 dBm
	10 GHz to 15 GHz	-60 dBm to +6 dBm	up to +8 dBm
	15 GHz to 20 GHz	-60 dBm to +5 dBm	up to +7 dBm
	20 GHz to 30 GHz	-60 dBm to +2 dBm	up to +5 dBm
	30 GHz to 40 GHz	-60 dBm to 0 dBm	up to +4 dBm

Power accuracy of the R&S®ZNBT8	source power –10 dBm		
	9 kHz to 50 kHz	≤ 3 dB	
	50 kHz to 8.5 GHz	≤ 2 dB	
Power accuracy of the R&S®ZNBT20	source power –10 dBm		
	100 kHz to 20 GHz	≤ 2 dB	
Power accuracy of the R&S®ZNBT26	source power –10 dBm		
	100 kHz to 20 GHz	≤ 2 dB	
	20 GHz to 26.5 GHz	≤ 3 dB	
Power accuracy of the R&S®ZNBT40	source power –10 dBm		
	100 kHz to 20 GHz	≤ 2 dB	
	20 GHz to 40 GHz	≤ 3 dB	
Power linearity of the R&S®ZNBT8	referenced to –10 dBm		
	source power ≥ –55 dBm	≤ 1 dB	
	source power < –55 dBm	≤ 2 dB	
Power linearity of the R&S®ZNBT20	referenced to –10 dBm		
	source power ≥ –60 dBm		
	10 MHz to 15 GHz	≤ 1 dB	
Power linearity of the R&S®ZNBT26	referenced to –10 dBm		
	source power ≥ –60 dBm		
	10 MHz to 15 GHz	≤ 1 dB	
Power linearity of the R&S®ZNBT40	referenced to –10 dBm		
	source power ≥ –60 dBm		
	10 MHz to 15 GHz	≤ 1 dB	
Power resolution		0.01 dB	



		Specification	Typical
Harmonics of the R&S®ZNBT8	at 0 dBm		
	20 kHz to 100 MHz	≤ –20 dBc	–30 dBc
	100 MHz to 8.5 GHz	≤ –25 dBc	–35 dBc
Harmonics of the R&S®ZNBT20	at 0 dBm		
	100 kHz to 10 GHz	≤ –25 dBc	–40 dBc
	10 GHz to 15 GHz	≤ –20 dBc	–30 dBc
Harmonics of the R&S®ZNBT26	at –5 dBm		
	15 GHz to 20 GHz	≤ –20 dBc	–30 dBc
	at 0 dBm		
Harmonics of the R&S®ZNBT40	100 kHz to 10 MHz	≤ –15 dBc	–30 dBc
	10 MHz to 100 MHz	≤ –20 dBc	–35 dBc
	100 MHz to 10 GHz	≤ –25 dBc	–30 dBc
	10 GHz to 15 GHz	≤ –18 dBc	–25 dBc
	at –5 dBm		
Harmonics of the R&S®ZNBT40	15 GHz to 18 GHz	≤ –18 dBc	–25 dBc
	18 GHz to 26.5 GHz	≤ –14 dBc	–20 dBc
	at 0 dBm		
Harmonics of the R&S®ZNBT40	100 kHz to 10 MHz	≤ –15 dBc	–30 dBc
	10 MHz to 100 MHz	≤ –20 dBc	–35 dBc
	100 MHz to 10 GHz	≤ –25 dBc	–30 dBc
	10 GHz to 15 GHz	≤ –18 dBc	–25 dBc
	at –5 dBm		
Harmonics of the R&S®ZNBT40	15 GHz to 18 GHz	≤ –18 dBc	–25 dBc
	18 GHz to 40 GHz	≤ –14 dBc	–20 dBc

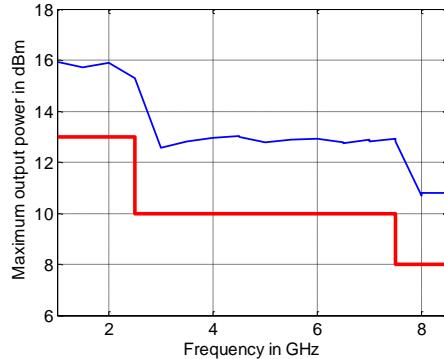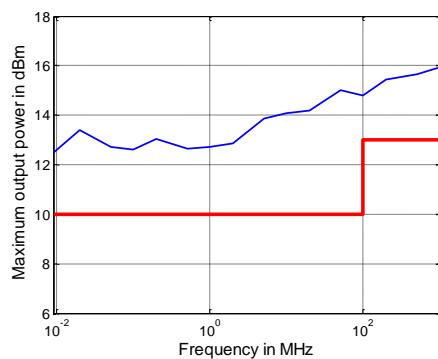



Maximum output power in dBm versus frequency for the R&S®ZNBT8

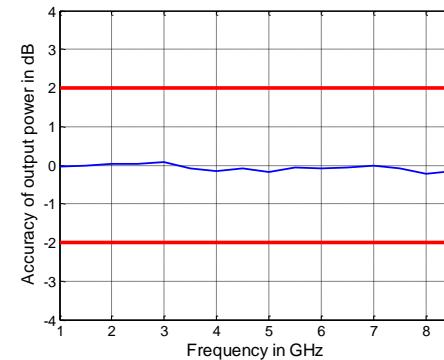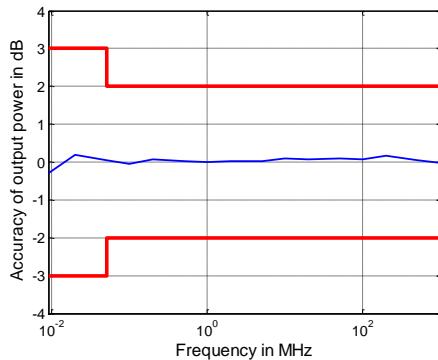



Output power accuracy in dB versus frequency for the R&S®ZNBT8

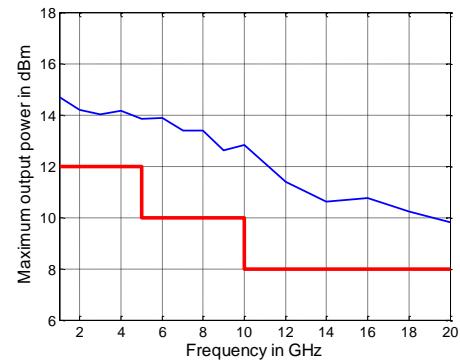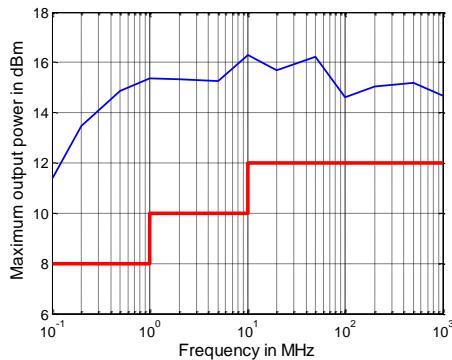



Maximum output power in dBm versus frequency for the R&S®ZNBT20

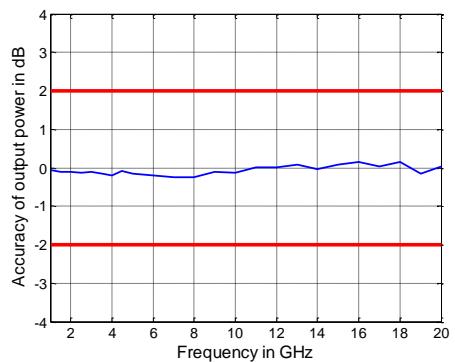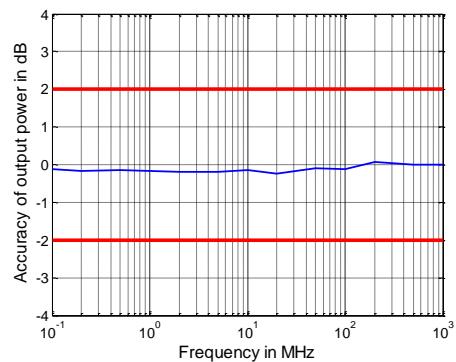

Output power accuracy in dB versus frequency for the R&S®ZNBT20

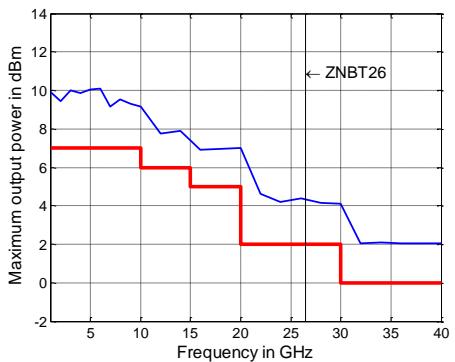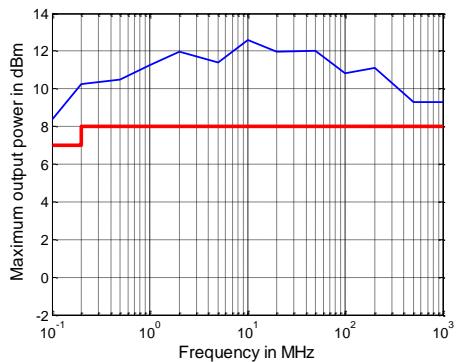

Maximum output power in dBm versus frequency for the R&S®ZNBT26/R&S®ZNBT40

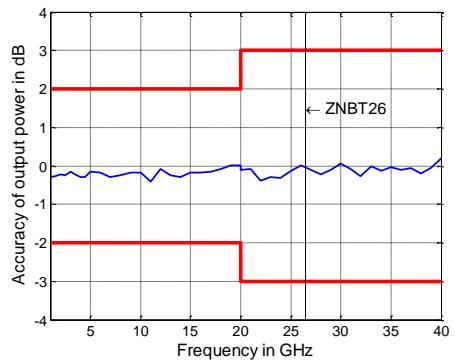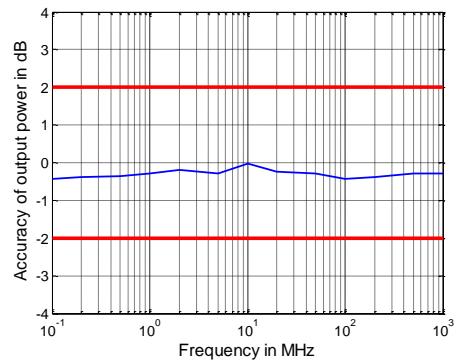

Output power accuracy in dB versus frequency for the R&S®ZNBT26/R&S®ZNBT40

Test port input

Match	without system error correction	
	R&S®ZNBT8	
9 kHz to 50 kHz	> 10 dB	
50 kHz to 8.5 GHz	> 20 dB	
R&S®ZNBT20		
100 kHz to 300 kHz	> 12 dB	
300 kHz to 10 MHz	> 15 dB	
10 MHz to 20 GHz	> 16 dB	
R&S®ZNBT26		
100 kHz to 300 kHz	> 12 dB	
300 kHz to 10 MHz	> 15 dB	
10 MHz to 20 GHz	> 18 dB	
20 GHz to 26.5 GHz	> 15 dB	
R&S®ZNBT40		
100 kHz to 300 kHz	> 12 dB	
300 kHz to 10 MHz	> 15 dB	
10 MHz to 20 GHz	> 18 dB	
20 GHz to 40 GHz	> 15 dB	
Maximum nominal input level	+13 dBm	
Power measurement accuracy at -10 dBm without power calibration	R&S®ZNBT8	
9 kHz to 100 kHz	< 2 dB	
100 kHz to 8.5 GHz	< 1 dB	
R&S®ZNBT20		
100 kHz to 20 GHz	< 1 dB ⁸	
R&S®ZNBT26		
100 kHz to 20 GHz	< 1 dB ⁸	
20 GHz to 26.5 GHz	< 1.5 dB	
R&S®ZNBT40		
100 kHz to 20 GHz	< 1 dB ⁸	
20 GHz to 40 GHz	< 1.5 dB	
Receiver linearity referenced to -10 dBm	R&S®ZNBT8	
for +20 dB to +10 dB		
9 kHz to 7.5 GHz	< 0.2 dB	
for +18 dB to +10 dB		
7.5 GHz to 8.5 GHz	< 0.2 dB	
for +10 dB to -40 dB		
9 kHz to 8.5 GHz	< 0.1 dB	
R&S®ZNBT20		
for +18 dB to +10 dB		
100 kHz to 500 MHz	< 0.3 dB	
for +20 dB to +10 dB		
500 MHz to 10 GHz	< 0.3 dB	
for +18 dB to +10 dB		
10 GHz to 20 GHz	< 0.3 dB	
for +10 dB to -40 dB		
100 kHz to 20 GHz	< 0.1 dB	
R&S®ZNBT26		
for +15 dB to +10 dB		
100 kHz to 20 GHz	< 0.2 dB	
for +10 dB to -40 dB		
100 kHz to 26.5 GHz	< 0.1 dB	
R&S®ZNBT40		
for +15 dB to +10 dB		
100 kHz to 20 GHz	< 0.2 dB	
for +10 dB to -40 dB		
100 kHz to 40 GHz	< 0.1 dB	
Damage level	+27 dBm	
Damage DC voltage	30 V	

⁸ Below 200 kHz, power measurement accuracy is <1.5 dB.

Noise level ⁹ at 1 kHz measurement bandwidth, normalized to 1 Hz	R&S®ZNBT8	
	9 kHz to 50 kHz	< -115 dBm (1 Hz)
	50 kHz to 50 MHz	< -120 dBm (1 Hz)
	50 MHz to 4 GHz	< -130 dBm (1 Hz)
	4 GHz to 6.5 GHz	< -125 dBm (1 Hz)
	6.5 GHz to 8.5 GHz	< -120 dBm (1 Hz)
	R&S®ZNBT20	
	100 kHz to 300 kHz	< -110 dBm (1 Hz)
	300 kHz to 1 MHz	< -115 dBm (1 Hz)
	1 MHz to 10 MHz	< -120 dBm (1 Hz)
	10 MHz to 2 GHz	< -125 dBm (1 Hz)
	2 GHz to 20 GHz	< -120 dBm (1 Hz)
	R&S®ZNBT26	
	100 kHz to 300 kHz	< -110 dBm (1 Hz)
	300 kHz to 1 MHz	< -115 dBm (1 Hz)
	1 MHz to 5 GHz	< -120 dBm (1 Hz)
	5 GHz to 20 GHz	< -118 dBm (1 Hz)
	20 GHz to 26.5 GHz	< -115 dBm (1 Hz)
	R&S®ZNBT40	
	100 kHz to 300 kHz	< -110 dBm (1 Hz)
	300 kHz to 1 MHz	< -115 dBm (1 Hz)
	1 MHz to 5 GHz	< -120 dBm (1 Hz)
	5 GHz to 20 GHz	< -118 dBm (1 Hz)
	20 GHz to 35 GHz	< -115 dBm (1 Hz)
	35 GHz to 40 GHz	< -105 dBm (1 Hz)

Additional front panel connectors

USB	(two) universal serial bus host connectors for connecting USB devices (USB 2.0); two additional USB connectors on rear panel
-----	---

Display

Screen	4.83 cm (1.9") diagonal electronic paper display
Resolution	144 × 128 pixel

⁹ The noise level is defined as the RMS value of the specified noise floor. Below 700 kHz, the R&S®ZNBT20/R&S®ZNBT26/R&S®ZNBT40 may exhibit spurious signals that exceed the specified noise level.

Rear panel connectors

LAN	local area network connector, 8-pin, RJ-45, 1 Gbit/s
-----	--

USB Host	(two) universal serial bus host connectors for connecting USB devices (USB 3.0); two additional USB connectors on front panel
USB Device	universal serial bus client connector for remote control of VNA (USB 3.0)

REF IN	input for external frequency reference signal
Connector type	BNC, female
Input frequency range	1 MHz to 20 MHz in steps of 1 MHz
Maximum permissible deviation	1 kHz
Input power	-10 dBm to +15 dBm
Input impedance	50 Ω

REF OUT	output for external frequency reference signal
Connector type	BNC, female
Output frequency	10 MHz
Output power	+9 dBm ± 4 dB at 50 Ω

MONITOR (DVI-D)	DVI-D connector (for external monitor, single link)
MONITOR (Display Port)	Display Port connector (for external monitor, version 1.1a)

USER CONTROL	several control and trigger signals, 25-pin D-Sub, 3.3 V TTL, for controlling external generators, for limit checks, sweep signals, etc.	
CHANNEL BIT 0 to CHANNEL BIT 3	pin 8 to pin 11 (outputs)	channel-specific, user-configurable bits
CHANNEL BIT 4 to CHANNEL BIT 7	pin 16 to pin 19 (outputs)	channel-specific, user-configurable bits
DRIVE PORT 1 to DRIVE PORT 4	pin 16 to pin 19 (outputs)	indicates drive ports (can alternatively be used for channel bits 4 to 7)
PASS 1 and PASS 2	pin 13 and pin 14 (outputs)	pass/fail results of limit checks
BUSY	pin 4 (output)	measurements running
READY FOR TRIGGER	pin 6 (output)	ready for trigger
EXT GEN TRIGGER	pin 21 (output)	control signal for external generator
EXT GEN BLANK	pin 22 (input)	handshake signal from external generator
EXTERNAL TRIGGER	pin 2 (input)	first trigger input for analyzer, 5 V tolerant
EXTERNAL TRIGGER 2	pin 25 (input)	second trigger input for analyzer, 5 V tolerant

EXT TRIG IN	trigger input for analyzer	
Connector type	BNC, female	
TTL signal	edge-triggered or level-triggered	3 V, 5 V tolerant
Polarity	selectable	positive or negative
Minimum pulse width		1 μs
Input impedance		> 10 kΩ

EXT TRIG OUT	trigger output of analyzer	
Connector type	BNC, female	
Logic high		typ. 3.3 V

Options

R&S®ZNBT-B4

Precision reference frequency		
Static frequency accuracy		(time since last adjustment × aging rate) + temperature drift + calibration accuracy
Aging per year	with R&S®ZNBT-B4 precision frequency reference option	$\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +40 °C)	with R&S®ZNBT-B4 precision frequency reference option	$\pm 1 \times 10^{-8}$
Achievable initial calibration accuracy	with R&S®ZNBT-B4 precision frequency reference option	$\pm 5 \times 10^{-8}$

R&S®ZNBT-B10

GPIB interface	remote control interface in line with IEEE 488, IEC 60625; 24-pin
-----------------------	---

R&S®ZNBT-B12

Device control	
DIRECT CTRL interface	direct control bus output

R&S®ZNBT8/ZNBT20/ZNBT26/ZNBT40-B21/-B22/-B23/-B24/-B25/-B26

		Specification	Typical
Extended power range			
Frequency range	R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26	9 kHz to 8.5 GHz	
	R&S®ZNBT20-B21/-B22/-B23/-B24/-B25/-B26	100 kHz to 20 GHz	
	R&S®ZNBT26-B21/-B22/-B23/-B24/-B25/-B26	100 kHz to 26.5 GHz	
	R&S®ZNBT40-B21/-B22/-B23/-B24/-B25/-B26	100 kHz to 40 GHz	
Power range of the R&S®ZNBT8	9 kHz to 100 MHz	-85 dBm to +10 dBm	up to +12 dBm
	100 MHz to 2.5 GHz	-85 dBm to +13 dBm	up to +15 dBm
	2.5 GHz to 7.5 GHz	-85 dBm to +10 dBm	up to +13 dBm
	7.5 GHz to 8.5 GHz	-85 dBm to +8 dBm	up to +12 dBm
Power range of the R&S®ZNBT20	100 kHz to 1 MHz	-60 dBm to +8 dBm	up to +13 dBm
	1 MHz to 10 MHz	-60 dBm to +10 dBm	up to +15 dBm
	10 MHz to 5 GHz	-60 dBm to +12 dBm	up to +14 dBm
	5 GHz to 10 GHz	-60 dBm to +10 dBm	up to +12 dBm
	10 GHz to 20 GHz	-60 dBm to +8 dBm	up to +10 dBm
Power range of the R&S®ZNBT26	100 kHz to 200 kHz	-60 dBm to +7 dBm	up to +10 dBm
	200 kHz to 1 GHz	-60 dBm to +8 dBm	up to +11 dBm
	1 GHz to 10 GHz	-60 dBm to +7 dBm	up to +10 dBm
	10 GHz to 15 GHz	-60 dBm to +6 dBm	up to +8 dBm
	15 GHz to 20 GHz	-60 dBm to +5 dBm	up to +7 dBm
	20 GHz to 26.5 GHz	-60 dBm to +2 dBm	up to +5 dBm
Power range of the R&S®ZNBT40	100 kHz to 200 kHz	-60 dBm to +7 dBm	up to +10 dBm
	200 kHz to 1 GHz	-60 dBm to +8 dBm	up to +11 dBm
	1 GHz to 10 GHz	-60 dBm to +7 dBm	up to +10 dBm
	10 GHz to 15 GHz	-60 dBm to +6 dBm	up to +8 dBm
	15 GHz to 20 GHz	-60 dBm to +5 dBm	up to +7 dBm
	20 GHz to 30 GHz	-60 dBm to +2 dBm	up to +5 dBm
	30 GHz to 40 GHz	-60 dBm to 0 dBm	up to +4 dBm

R&S®ZNBT-B81

Data are valid from +18 °C to +28 °C and at a maximum measurement bandwidth of 10 kHz.

DC inputs		
Number of ports		4
Connector type		BNC, female
Voltage range		±20 V, ±3 V, ±0.3 V
Measurement accuracy	±20 V	1 % of reading + 0.01 V
	±3 V	1 % of reading + 0.001 V
	±0.3 V	1 % of reading ± 0.001 V
Input impedance		≥ 1 MΩ
Damage voltage		30 V

R&S®ZNBT8-B108 to R&S®ZNBT8-B124, R&S®ZNBT20/ZNBT26/ZNBT40-B112 to R&S®ZNBT20/ZNBT26/ZNBT40-B124

For additional ports, the specifications of paragraphs Measurement range, Measurement speed, Measurement accuracy, Effective system data, Factory-calibrated system data, Test port output and Test port input are valid in an analogous way.

R&S®ZNBT8-B504/-B508/-B512/-B516/-B520/-B524

Extended dynamic range	Specification	Typical
Power range	without R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	9 kHz to 2 MHz	-55 dBm to +8 dBm
	2 MHz to 6.5 GHz	-55 dBm to +10 dBm
	6.5 GHz to 7.5 GHz	-55 dBm to +8 dBm
	7.5 GHz to 8.5 GHz	-55 dBm to +4 dBm
	with R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	9 kHz to 2 MHz	-85 dBm to +8 dBm
	2 MHz to 6.5 GHz	-85 dBm to +10 dBm
	6.5 GHz to 7.5 GHz	-85 dBm to +8 dBm
	7.5 GHz to 8.5 GHz	-85 dBm to +4 dBm
Dynamic range ¹⁰	9 kHz to 100 kHz	≥ 100 dB
	100 kHz to 50 MHz	≥ 125 dB
	50 MHz to 7 GHz	≥ 135 dB
	7 GHz to 8.5 GHz	≥ 130 dB
		110 dB
		135 dB
		145 dB
		140 dB

Test port input		
Match	without system error correction	
	9 kHz to 50 kHz	≥ 10 dB
	50 kHz to 8.5 GHz	≥ 18 dB
Maximum nominal input level		+10 dBm
Receiver linearity referenced to -10 dBm	for +18 dB to +10 dB	
	9 kHz to 7.5 GHz	≤ 0.2 dB
	for +14 dB to +10 dB	
	7.5 GHz to 8.5 GHz	≤ 0.2 dB
	for +10 dB to -40 dB	
	9 kHz to 8.5 GHz	≤ 0.1 dB
Noise level ¹¹ at 1 kHz measurement bandwidth, normalized to 1 Hz	9 kHz to 50 kHz	≤ -125 dBm (1 Hz)
	50 kHz to 50 MHz	≤ -130 dBm (1 Hz)
	50 MHz to 7 GHz	≤ -140 dBm (1 Hz)
	7 GHz to 8.5 GHz	≤ -130 dBm (1 Hz)

¹⁰ The dynamic range is defined as the difference between the actual maximum source power and the RMS value of the data trace of the transmission magnitude, which is produced by noise and crosstalk with the test ports short-circuited. The specification applies at 10 Hz measurement bandwidth, without system error correction. The dynamic range can be increased by using a measurement bandwidth of 1 Hz. Crosstalk does not limit the dynamic range. Dynamic range for test port pairs where the receiving port is fitted with option R&S®ZNBT8-B5xx. If the source port is fitted with option R&S®ZNBT8-B5xx and the receiving port is not, the values reduce by up to 10 dB.

¹¹ The noise level is defined as the RMS value of the specified noise floor.

Trace stability			Specification	Typical
Trace noise magnitude (RMS)	at 0 dBm source power, 0 dB reflection	IF bandwidth		
	100 kHz to 100 MHz	10 kHz	≤ 0.005 dB	0.001 dB
	100 MHz to 8.5 GHz	10 kHz	≤ 0.005 dB	0.002 dB

R&S®ZNBT-Z14



Handler I/O (external)	several control and trigger signals, 36-pin Centronics connector, 3.3 V TTL, for controlling external devices, limit checks, sweep signals, etc.		
Keysight handler interface compatibility	type 3		
Input signals	pin 2, pin 18	3.3 V TTL, 5 V tolerant	
Output signals	pin 3 to pin 17, pin 19 to pin 21, pin 30 to pin 34, pin 36	3.3 V TTL, 5 V tolerant	
Input/output signals	pin 22 to pin 29	3.3 V TTL, 5 V tolerant	
+5 V output	pin 35	+5 V, max. 100 mA	
Response time of write strobe signal	pin 32	1 µs	
Pulse width of write strobe signal	pin 32	1 µs	
Pulse width of external trigger signal	pin 18	> 1 µs	
Pulse width of sweep end signal	pin 34	> 10 µs	


General data

Temperature loading		in line with IEC 60068-2-1 and IEC 60068-2-2
	operating temperature range storage temperature range	+5 °C to +40 °C –20 °C to +60 °C
Damp heat		+40 °C at 85 % rel. humidity, in line with IEC 60068-2-30
Altitude	operating environment storage environment	max. 2000 m max. 4500 m
Mechanical resistance	vibration, sinusoidal vibration, random shock	5 Hz to 55 Hz, 0.15 mm amplitude constant, 55 Hz to 150 Hz, 0.5 g constant, in line with IEC 60068-2-6 10 Hz to 300 Hz, acceleration 1.2 g (RMS) in line with IEC 60068-2-64 40 g shock spectrum, in line with MIL-STD-810E, method 516.4, procedure I
Calibration interval		1 year
EMC	RF emission immunity	in line with CISPR 11/EN 55011 group 1 class A (for a shielded test setup); instrument complies with the emission requirements stipulated by EN 55011 and EN 61326-1 class A; this means that the instrument is suitable for use in industrial environments in line with EMC Directive 2014/30/EU, including: IEC/EN 61326-1 (immunity test requirement for industrial environment IEC/EN 61326-1 table 2), IEC/EN 61326-2-1, IEC/EN 61000-3-2, IEC/EN 61000-3-3
Safety		in line with IEC 61010-1, EN 61010-1 and UL 61010-1, CAN/CSA-C22.2 No. 61010-1
Power supply		100 V to 240 V at 50 Hz to 60 Hz and 400 Hz, max. 10 A to 4.2 A, respectively
Power consumption	R&S®ZNBT8	
	with 4 ports	max. 1000 W, typ. 199 W
	with 8 ports	max. 1000 W, typ. 267 W
	with 12 ports	max. 1000 W, typ. 357 W
	with 16 ports	max. 1000 W, typ. 432 W
	with 20 ports	max. 1000 W, typ. 522 W
	with 24 ports	max. 1000 W, typ. 586 W
	R&S®ZNBT20	
	with 8 ports	max. 1000 W, typ. 310 W
	with 12 ports	max. 1000 W, typ. 390 W
	with 16 ports	max. 1000 W, typ. 450 W
	with 20 ports	max. 1000 W, typ. 530 W
	with 24 ports	max. 1000 W, typ. 590 W
	R&S®ZNBT26/40	
	with 8 ports	max. 1000 W, typ. 335 W
	with 12 ports	max. 1000 W, typ. 426 W
	with 16 ports	max. 1000 W, typ. 521 W
	with 20 ports	max. 1000 W, typ. 637 W
	with 24 ports	max. 1000 W, typ. 732 W
Test mark		VDE, GS, cCSA _{US} , CE conformity mark


Dimensions	W × H × D	463 mm × 240 mm × 612 mm (18.2 in × 9.4 in × 24.1 in)
Weight	R&S®ZNBT8	
	with 4 ports	typ. 22 kg (48.5 lb)
	with 8 ports	typ. 24 kg (52.9 lb)
	with 12 ports	typ. 29 kg (63.9 lb)
	with 16 ports	typ. 31 kg (68.3 lb)
	with 20 ports	typ. 36 kg (79.4 lb)
	with 24 ports	typ. 38 kg (83.8 lb)
	R&S®ZNBT20/R&S®ZNBT26/R&S®ZNBT40	
	with 8 ports	typ. 27 kg (59.5 lb)
	with 12 ports	typ. 34 kg (75 lb)
	with 16 ports	typ. 36 kg (79.4 lb)
	with 20 ports	typ. 43 kg (94.8 lb)
	with 24 ports	typ. 45 kg (99.2 lb)
Shipping weight	R&S®ZNBT8	
	with 4 ports	typ. 28 kg (61.7 lb)
	with 8 ports	typ. 30 kg (66.1 lb)
	with 12 ports	typ. 35 kg (77.2 lb)
	with 16 ports	typ. 37 kg (81.6 lb)
	with 20 ports	typ. 42 kg (92.6 lb)
	with 24 ports	typ. 44 kg (97.0 lb)
	R&S®ZNBT20/R&S®ZNBT26/R&S®ZNBT40	
	with 8 ports	typ. 33 kg (72.8 lb)
	with 12 ports	typ. 40 kg (88.2 lb)
	with 16 ports	typ. 42 kg (92.6 lb)
	with 20 ports	typ. 49 kg (108.0 lb)
	with 24 ports	typ. 51 kg (112.4 lb)

Dimensions (in mm)

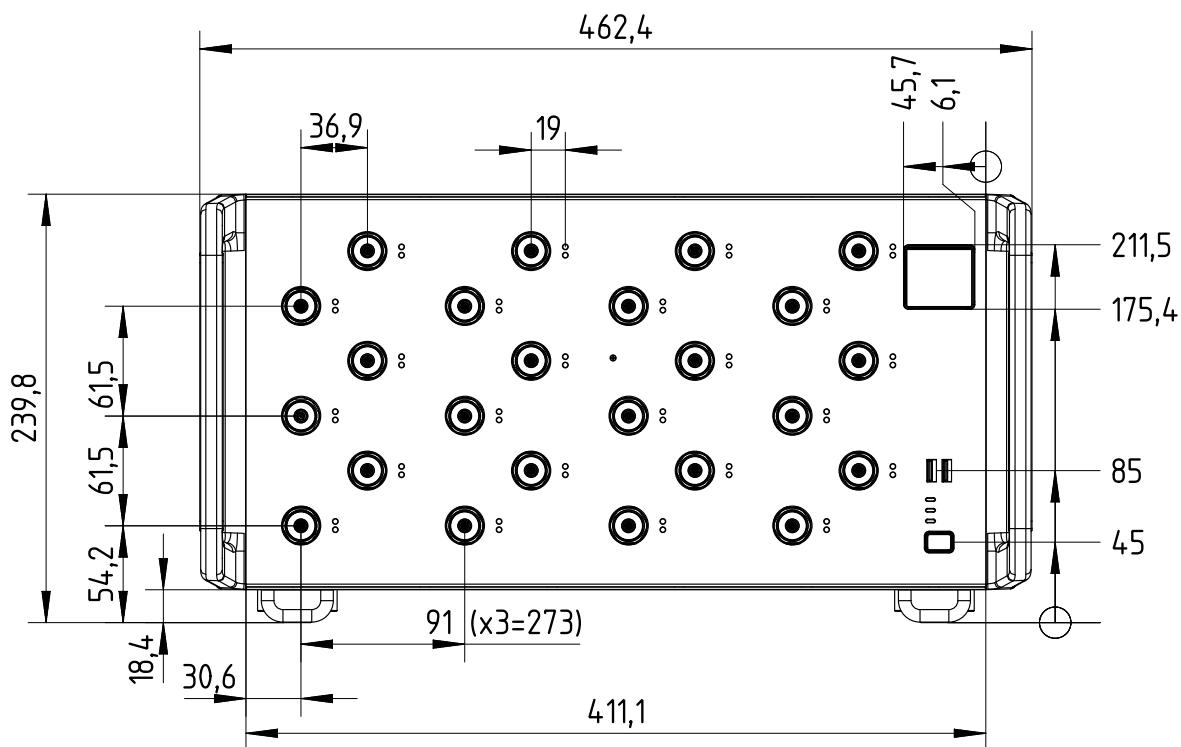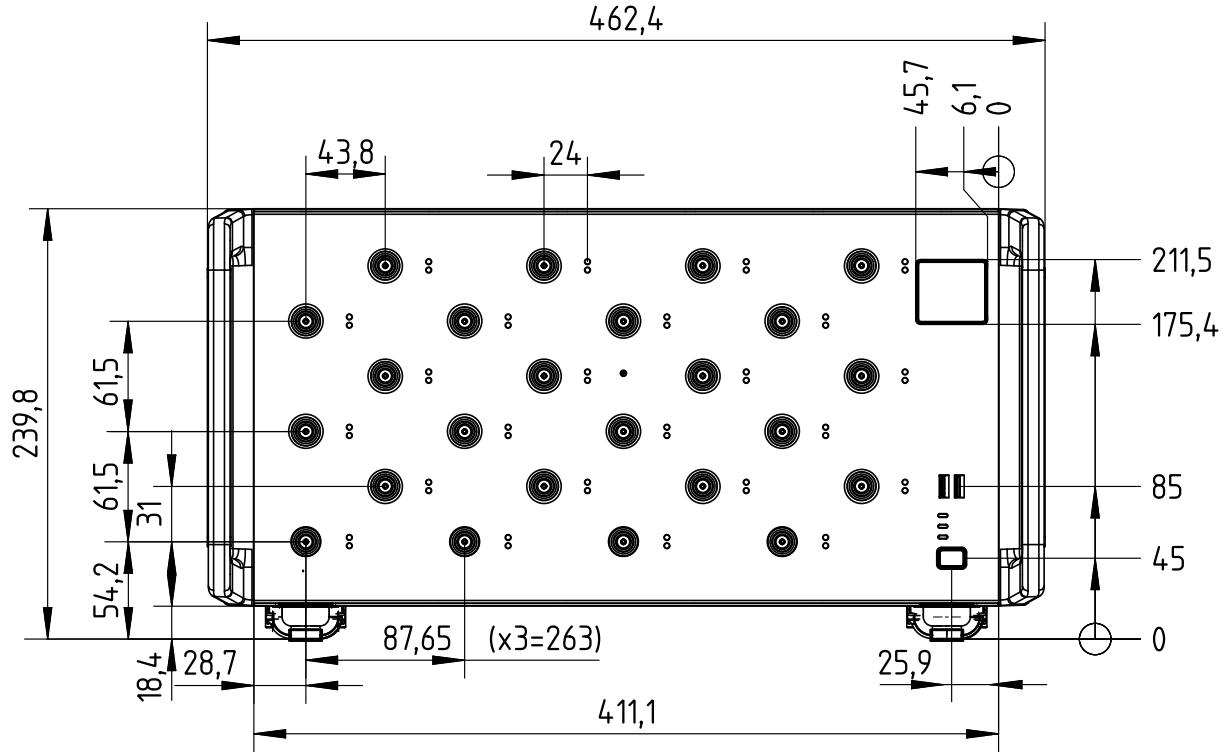


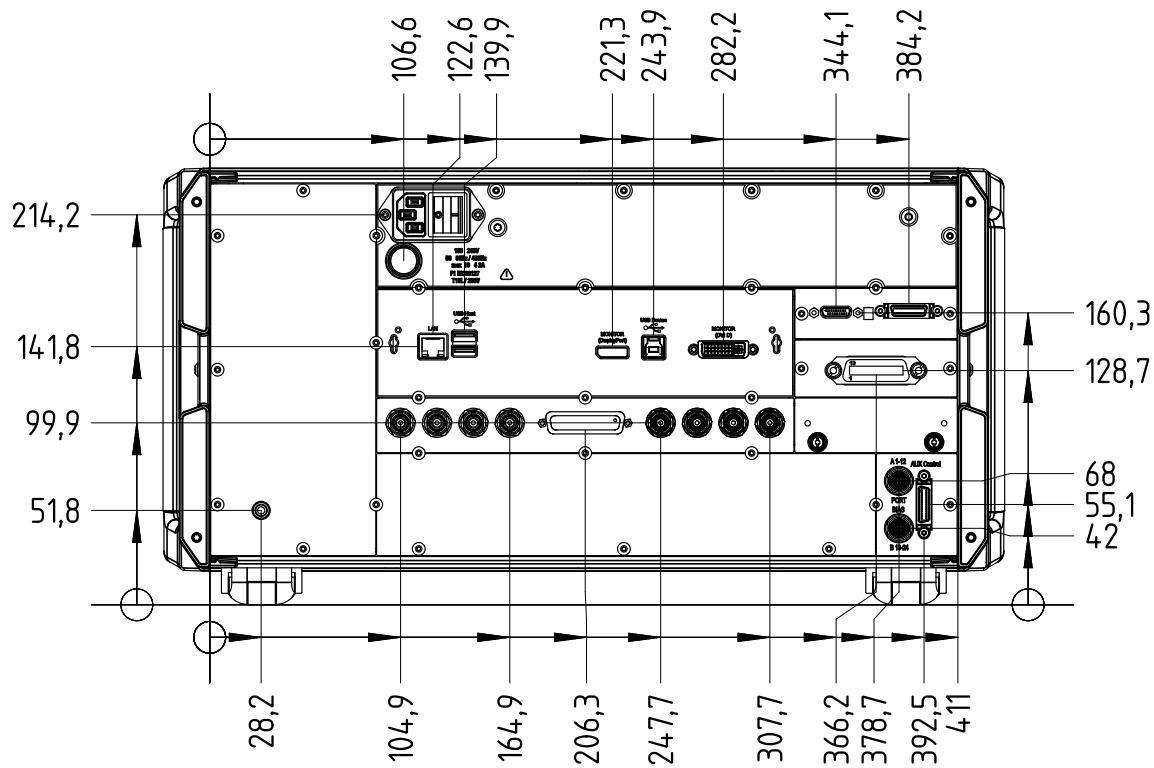

Rear view of the R&S®ZNBT8, the R&S®ZNBT20, the R&S®ZNBT26 and the R&S®ZNBT40

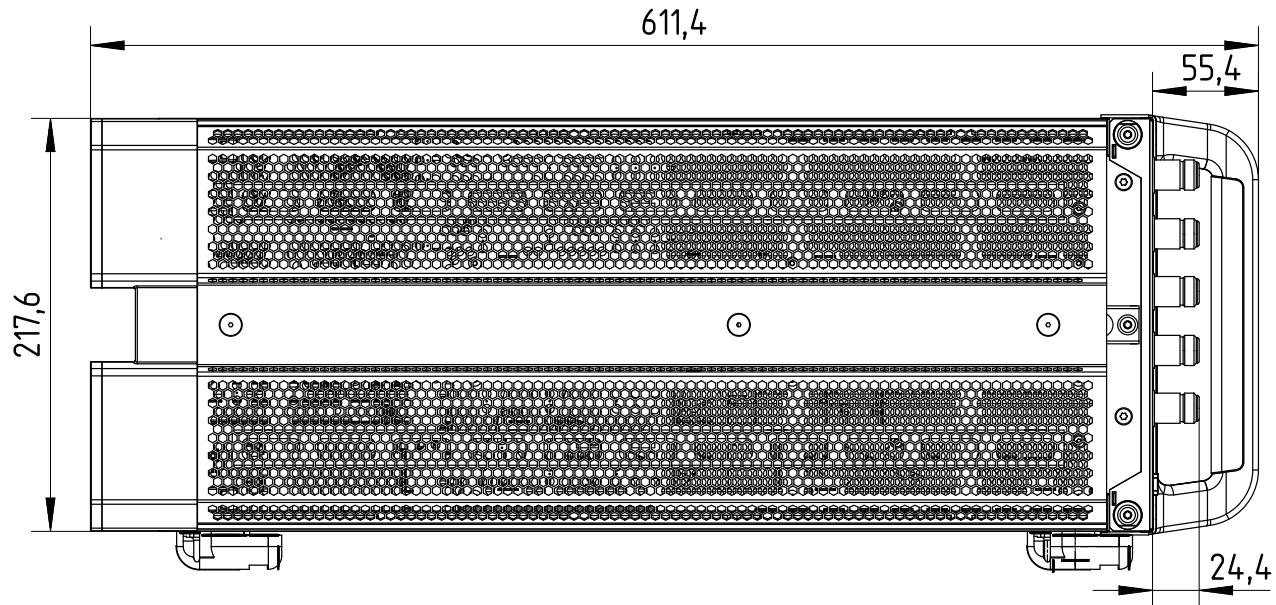

Side view of the R&S®ZNBT8

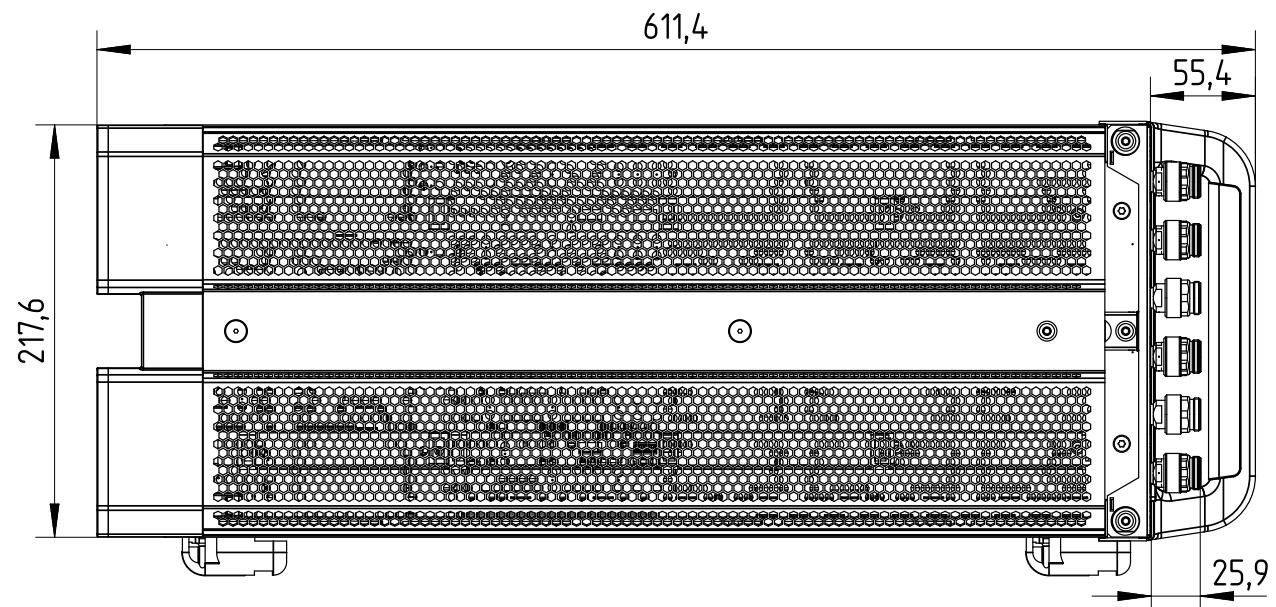

Side view of the R&S®ZNBT20, R&S®ZNBT26 and R&S®ZNBT40

Ordering information

Designation	Type	Retrofit ¹²	On site ¹³	Order No.
Base unit				
Vector network analyzer, 4 ports, 8.5 GHz, N ¹⁴	R&S®ZNBT8			1318.7006.24
Vector network analyzer, 8 ports, 20 GHz, 3.5 mm ¹⁴	R&S®ZNBT20			1332.9002.24
Vector network analyzer, 8 ports, 26.5 GHz, 2.92 mm ¹⁴	R&S®ZNBT26			1332.9002.34
Vector network analyzer, 8 ports, 40 GHz, 2.92 mm ¹⁴	R&S®ZNBT40			1332.9002.44
Options				
Additional ports				
Additional ports 5 to 8, for R&S®ZNBT8	R&S®ZNBT8-B108	•		1319.4200.02
Additional ports 9 to 12, for R&S®ZNBT8	R&S®ZNBT8-B112	•		1319.4217.02
Additional ports 13 to 16, for R&S®ZNBT8	R&S®ZNBT8-B116	•		1319.4223.02
Additional ports 17 to 20, for R&S®ZNBT8	R&S®ZNBT8-B120	•		1319.4230.02
Additional ports 21 to 24, for R&S®ZNBT8	R&S®ZNBT8-B124	•		1319.4246.02
Additional ports 9 to 12, for R&S®ZNBT20	R&S®ZNBT20B112	•		1332.9454.02
Additional ports 13 to 16, for R&S®ZNBT20	R&S®ZNBT20B116	•		1332.9460.02
Additional ports 17 to 20, for R&S®ZNBT20	R&S®ZNBT20B120	•		1332.9302.02
Additional ports 21 to 24, for R&S®ZNBT20	R&S®ZNBT20B124	•		1332.9319.02
Additional ports 9 to 12, for R&S®ZNBT26	R&S®ZNBT26B112	•		1332.9454.34
Additional ports 13 to 16, for R&S®ZNBT26	R&S®ZNBT26B116	•		1332.9460.34
Additional ports 17 to 20, for R&S®ZNBT26	R&S®ZNBT26B120	•		1332.9302.34
Additional ports 21 to 24, for R&S®ZNBT26	R&S®ZNBT26B124	•		1332.9319.34
Additional ports 9 to 12, for R&S®ZNBT40	R&S®ZNBT40B112	•		1332.9454.44
Additional ports 13 to 16, for R&S®ZNBT40	R&S®ZNBT40B116	•		1332.9460.44
Additional ports 17 to 20, for R&S®ZNBT40	R&S®ZNBT40B120	•		1332.9302.44
Additional ports 21 to 24, for R&S®ZNBT40	R&S®ZNBT40B124	•		1332.9319.44
Extended power range				
Extended power range, ports 1 to 4, for R&S®ZNBT8	R&S®ZNBT8-B21	•		1319.4252.02
Extended power range, ports 5 to 8, for R&S®ZNBT8	R&S®ZNBT8-B22	•		1319.4269.02
Extended power range, ports 9 to 12, for R&S®ZNBT8	R&S®ZNBT8-B23	•		1319.4275.02
Extended power range, ports 13 to 16, for R&S®ZNBT8	R&S®ZNBT8-B24	•		1319.4281.02
Extended power range, ports 17 to 20, for R&S®ZNBT8	R&S®ZNBT8-B25	•		1319.4298.02
Extended power range, ports 21 to 24, for R&S®ZNBT8	R&S®ZNBT8-B26	•		1319.4300.02
Extended power range, ports 1 to 4, for R&S®ZNBT20	R&S®ZNBT20-B21	•		1332.9348.02
Extended power range, ports 5 to 8, for R&S®ZNBT20	R&S®ZNBT20-B22	•		1332.9354.02
Extended power range, ports 9 to 12, for R&S®ZNBT20	R&S®ZNBT20-B23	•		1332.9360.02
Extended power range, ports 13 to 16, for R&S®ZNBT20	R&S®ZNBT20-B24	•		1332.9377.02
Extended power range, ports 17 to 20, for R&S®ZNBT20	R&S®ZNBT20-B25	•		1332.9383.02
Extended power range, ports 21 to 24, for R&S®ZNBT20	R&S®ZNBT20-B26	•		1332.9390.02
Extended power range, ports 1 to 4, for R&S®ZNBT26	R&S®ZNBT26-B21	•		1332.9348.34
Extended power range, ports 5 to 8, for R&S®ZNBT26	R&S®ZNBT26-B22	•		1332.9354.34
Extended power range, ports 9 to 12, for R&S®ZNBT26	R&S®ZNBT26-B23	•		1332.9360.34
Extended power range, ports 13 to 16, for R&S®ZNBT26	R&S®ZNBT26-B24	•		1332.9377.34
Extended power range, ports 17 to 20, for R&S®ZNBT26	R&S®ZNBT26-B25	•		1332.9383.34
Extended power range, ports 21 to 24, for R&S®ZNBT26	R&S®ZNBT26-B26	•		1332.9390.34
Extended power range, ports 1 to 4, for R&S®ZNBT40	R&S®ZNBT40-B21	•		1332.9348.44
Extended power range, ports 5 to 8, for R&S®ZNBT40	R&S®ZNBT40-B22	•		1332.9354.44
Extended power range, ports 9 to 12, for R&S®ZNBT40	R&S®ZNBT40-B23	•		1332.9360.44
Extended power range, ports 13 to 16, for R&S®ZNBT40	R&S®ZNBT40-B24	•		1332.9377.44
Extended power range, ports 17 to 20, for R&S®ZNBT40	R&S®ZNBT40-B25	•		1332.9383.44
Extended power range, ports 21 to 24, for R&S®ZNBT40	R&S®ZNBT40-B26	•		1332.9390.44
Receiver step attenuators				
Receiver step attenuators for ports 1 to 4, for R&S®ZNBT8	R&S®ZNBT8-B361	•		1319.4317.02
Receiver step attenuators for ports 5 to 8, for R&S®ZNBT8	R&S®ZNBT8-B362	•		1319.4323.02
Receiver step attenuators for ports 9 to 12, for R&S®ZNBT8	R&S®ZNBT8-B363	•		1319.4330.02
Receiver step attenuators for ports 13 to 16, for R&S®ZNBT8	R&S®ZNBT8-B364	•		1319.4346.02
Receiver step attenuators for ports 17 to 20, for R&S®ZNBT8	R&S®ZNBT8-B365	•		1319.4352.02
Receiver step attenuators for ports 21 to 24, for R&S®ZNBT8	R&S®ZNBT8-B366	•		1319.4369.02

¹² Option may also be ordered at a later stage, upgrade in service.¹³ Option may be installed by the customer on site.¹⁴ External monitor, mouse and keyboard or external touchscreen required for manual operation.

Designation	Type	Retrofit 12	On site ¹³	Order No.
Extended dynamic range ¹⁵				
Extended dynamic range for ports 1 to 4, for R&S®ZNBT8	R&S®ZNBT8-B504			1332.8335.02
Extended dynamic range for ports 5 to 8, for R&S®ZNBT8	R&S®ZNBT8-B508	•		1332.8341.02
Extended dynamic range for ports 9 to 12, for R&S®ZNBT8	R&S®ZNBT8-B512	•		1332.8358.02
Extended dynamic range for ports 13 to 16, for R&S®ZNBT8	R&S®ZNBT8-B516	•		1332.8364.02
Extended dynamic range for ports 17 to 20, for R&S®ZNBT8	R&S®ZNBT8-B520	•		1332.8370.02
Extended dynamic range for ports 21 to 24, for R&S®ZNBT8	R&S®ZNBT8-B524	•		1332.8387.02
Precision frequency reference (OCXO)	R&S®ZNBT-B4	•		1332.9477.02
GPIB interface	R&S®ZNBT-B10	•	•	1332.9483.02
Device control	R&S®ZNBT-B12	•	•	1332.9490.02
Additional removable HDDs and SSDs				
Additional removable hard disk, 64 bit, Windows®7, for R&S®ZNBT8 with LPW10	R&S®ZNBT-B19	•	•	1332.9283.10
Additional removable hard disk, 64 bit, Windows®7, for R&S®ZNBT8/R&S®ZNBT20 with LPW11	R&S®ZNBT-B19	•	•	1332.9283.11
Additional removable SSD, 64 bit, Windows®10, for R&S®ZNBT8/R&S®ZNBT20/R&S®ZNBT26/R&S®ZNBT40	R&S®ZNBT-B19	•	•	1332.9283.12
DC inputs	R&S®ZNBT-B81	•		1332.9502.02
Time domain analysis	R&S®ZNBT-K2	•	•	1318.8425.02
Distance-to-fault (DTF) measurement	R&S®ZNBT-K3	•	•	1350.5063.02
Extended time domain analysis	R&S®ZNBT-K20	•	•	1319.4400.02
Frequency conversion ¹⁶	R&S®ZNBT-K4	•	•	1318.8431.02
Intermodulation measurements ¹⁷	R&S®ZNBT-K14	•	•	1318.8448.02
10 MHz receiver bandwidth	R&S®ZNBT-K17	•	•	1318.8454.02
1 millihertz frequency resolution	R&S®ZNBT-K19	•	•	1319.4000.02
Easy deembedding	R&S®ZNBT-K210	•	•	1328.8634.02
In-situ deembedding	R&S®ZNBT-K220	•		1328.8640.02
Smart fixture deembedding	R&S®ZNBT-K230	•		1328.8657.02
Delta-L PCB characterization	R&S®ZNBT-K231	•		1328.8663.02
Handler I/O (external) for R&S®ZNBT	R&S®ZNBT-Z14	•	•	1326.6640.05
External RFFE GPIO interface	R&S®ZN-Z15	•	•	1325.5905.02
External RFFE GPIO interface incl. voltage/current measurement	R&S®ZN-Z15	•	•	1325.5905.03
Rackmount kit	R&S®ZZA-KN5	•	•	1175.3040.00
Direct control cable	R&S®ZN-B121	•	•	1323.9290.00

Warranty		
Base unit		3 years
All other items		1 year
Options		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	

Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge¹⁸. Necessary calibration and adjustments carried out during repairs are also covered.

Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs¹⁸ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

¹⁵ The R&S®ZNBT8-B504/-B508/-B512/-B516/-B520/-B524 options cannot be combined with the R&S®ZNBT8-B361/-B362/-B363/-B364/-B365/-B366 options.

¹⁶ Second internal source is included with R&S®ZNBT8/R&S®ZNBT20/R&S®ZNBT26/R&S®ZNBT40-B112.

¹⁷ Requires R&S®ZNBT-K4.

¹⁸ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Service that adds value

- Worldwide
- Local and personalized
- Customized and flexible
- Uncompromising quality
- Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- Environmental compatibility and eco-footprint
- Energy efficiency and low emissions
- Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support



R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3606.9727.22 | Version 09.00 | November 2020 (ch)

R&S®ZNBT Vector Network Analyzer

Data without tolerance limits is not binding | Subject to change

© 2014 - 2020 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany