


## QC-8-FB-086-1

### DC~67GHz, SSMP Female

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

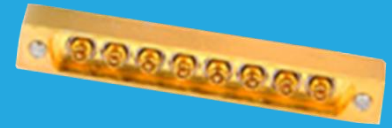

#### Electrical

Frequency: DC~67GHz  
Impedance: 50Ω  
VSWR: 1.25 typ. @DC~40GHz

#### Mechanical

Mating Cable: QA220, QH280, QK086, QF086, QE086, QD086  
Matching PCB Connector: QC-8-MB-01  
Conductor: Gold plated brass  
Connector\*1: SSMP female

[1] Mateable with GPPO, SMPM & Mini-SMP.

#### Environmental


Temperature: -55~+155°C

#### How To Order

[QC-8-FB-086-1](#)

Customization is available upon request.

#### Outline Drawings

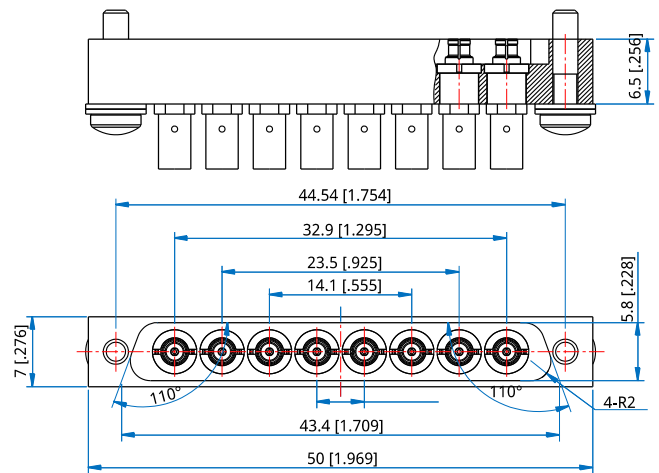

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]