

# QCC-26500-40000-5-K-1

## 26.5~40GHz, 5W

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

**Electrical**

Frequency:	26.5~40GHz
Insertion Loss:	1.6dB max.
Isolation:	14dB min.
VSWR:	1.6 max.
Average Power:	5W

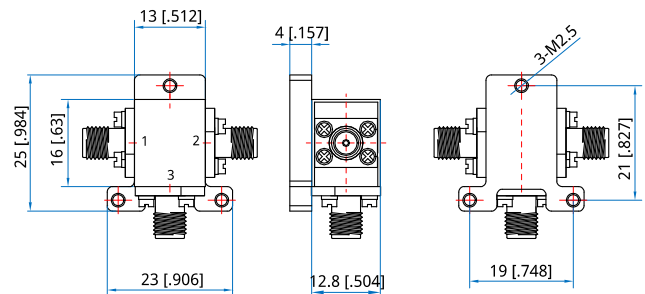
**Mechanical**

Size <sup>*1</sup> :	13*25*16.8mm 0.512*0.984*0.661in
RF Connectors:	2.92mm Female
Mounting:	3-M2.5 through-hole
Direction:	Clockwise

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C (1.8dB/12dB/1.80)
--------------	-----------------------------

**Outline Drawings**


Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

**How To Order**

**QCC-26500-40000-5-K-1**

Customization is available upon request.