

QCI2528C

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

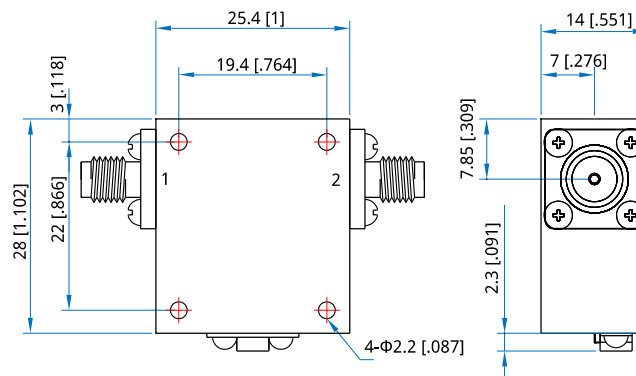
- * Wireless
- * Radar
- * Laboratory Test

Description

QCI2528C series Coaxial Isolators cover frequency range 2700~6200MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Connector	Temperature (°C)
2700~6200	3500	0.80	16.0	1.40	60	20	SMA, N	-10~+60
3000~6000	3000	0.60	18.0	1.35	60	20	SMA, N	-10~+60

Outline Drawings


Unit: mm [inch]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Mechanical

Size^{*1}: 25.4*28*14mm

1*1.102*0.551in

Mounting: 4-Φ2.2mm through-hole

^[1] Exclude connectors and terminations.

Connector Naming Rules:

S - SMA Female

Direction Naming Rules:

1 - Clockwise

2 - Anticlockwise

How To Order
QCI2528C-U-V-W-X-Y-Z

U: Start frequency in MHz

V: Stop frequency in MHz

W: Forward power in W

X: Reverse power in W

Y: Connector type

Z: Direction type

Examples:

To order a QCI2528C series Isolator, 3000~6000MHz, Forward power 60W, Reverse power 20W, SMA female, Clockwise, specify QCI2528C-3000-6000-60-20-S-1.

Customization is available upon request.

