

QCK-FG-T50-1

2.92mm Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC-40GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	1000V DC min.
Impedance:	50 Ω

Mechanical



RF Connector:	2.92mm Female
Mating Cable:	QT50
Outer Conductor:	303F stainless steel

How To Order

QCK-FG-T50-1

Customization is available upon request.

Outline Drawings

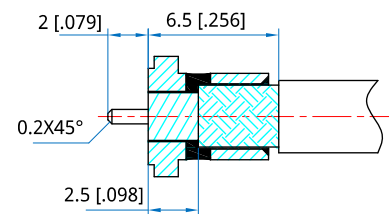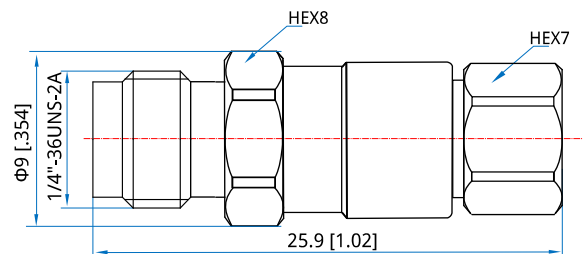

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]