

QCS-FB-086-2

SMA Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~26.5GHz
VSWR: 1.25 max.

Mechanical

RF Connector: SMA Female
Mating Cable: QH280, QE086, QD086, RG316
Outer Conductor: Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold plated Beryllium copper

Environmental


Temperature: -55~+165°C

How To Order

[QCS-FB-086-2](#)

Customization is available upon request.

Outline Drawings

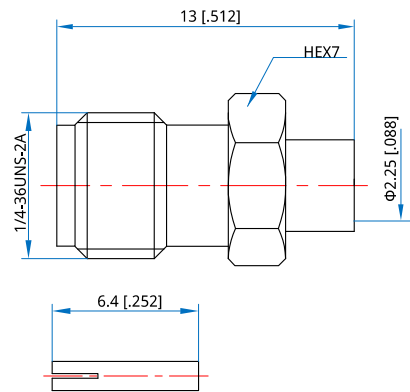

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]