

## QCS-MB-086-4

### SMA Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



#### Electrical

Frequency: DC~26.5GHz  
VSWR: 1.25 max.

#### Mechanical


RF Connector: SMA Male  
Mating Cable: QH280, QE086, QD086, RG316  
Outer Conductor: Gold Plated Brass  
Dielectric: PTFE  
Inner Conductor: Gold Plated Brass

#### How To Order

**QCS-MB-086-4**

Customization is available upon request.

#### Outline Drawings

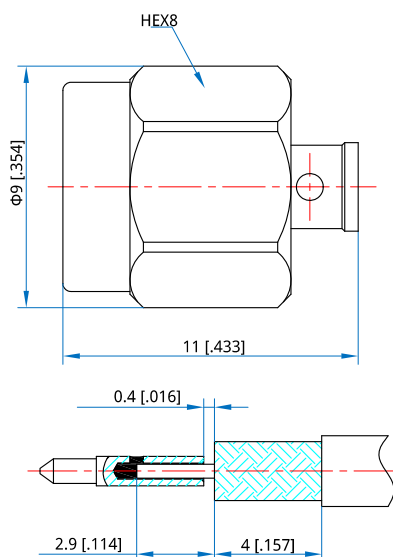

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]