

QCT-FL4G-T

TNC Connector, DC~18GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.15 max.
Impedance of Dielectric:	5000MΩ min.
Impedance of Inner Conductor:	1.5mΩ max.
Impedance of Outer Conductor:	0.2mΩ max.
Voltage Withstand:	1500V DC
Impedance:	50Ω


Mechanical

RF Connector:	TNC Female
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated SUS303 Stainless Steel
Dielectric:	PEI & PTFE
Inner Conductor:	Gold Plated Beryllium Copper


Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

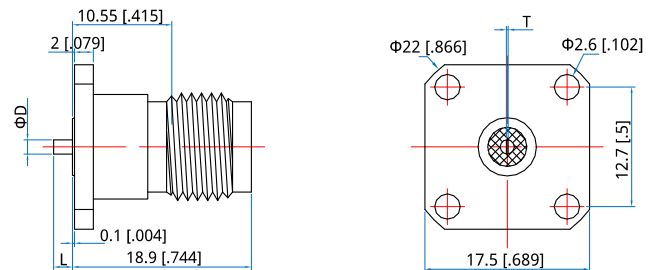

Part Number	ΦD	L	T
QCT-FL4G-T150-01	1.5 [.059]	2 [.079]	0.2 [.008]

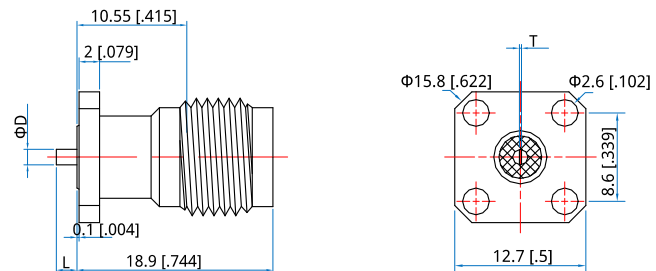

Part Number	ΦD	L	T
QCT-FL4G-T150-02	1.5 [.059]	2 [.079]	0.2 [.008]

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]