

QCV-FYG-D

1.85mm Connector, DC~67GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~67GHz
VSWR:	1.25 max.
Impedance of Dielectric:	3000MΩ min.
Impedance of Inner Conductor:	3mΩ max.
Impedance of Outer Conductor:	2.5mΩ max.
Voltage Withstand:	500V DC
Impedance:	50Ω


Mechanical

RF Connector:	1.85mm Female
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated SUS303 Stainless Steel
Dielectric:	PEI
Inner Conductor:	Gold Plated Beryllium Copper


Environmental

Temperature:	-55~+165°C
--------------	------------


Outline Drawings

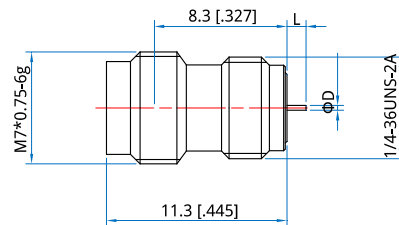

Part Number	ΦD	L
QCV-FYG-D30-01	0.3 [.012]	1.2 [.047]
QCV-FYG-D30-02	0.3 [.012]	2 [.079]

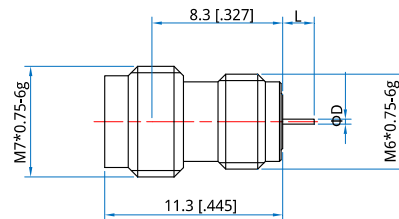

Part Number	ΦD	L
QCV-FYG-D30-03	0.3 [.012]	1.2 [.047]
QCV-FYG-D30-04	0.3 [.012]	2 [.079]

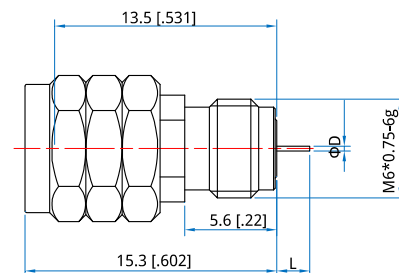

Part Number	ΦD	L
QCV-MFYG-D30-01	0.3 [.012]	2 [.079]

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]