

QDI1313M

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

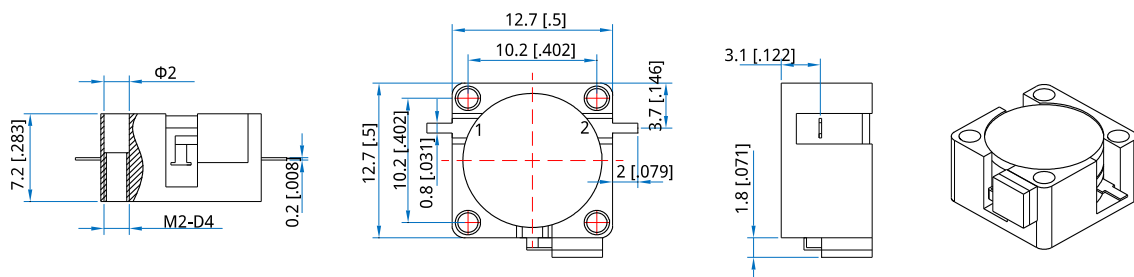
- * Wireless
- * Radar
- * Laboratory Test

Description

QDI1313M series Drop-In Isolators cover frequency range 1700~6000MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Temperature (°C)
1710~1785	75	0.30	23.0	1.20	60	20	-30~+70
1805~1880	75	0.30	23.0	1.20	60	20	-30~+70
1805~1920	115	0.40	20.0	1.25	60	20	-30~+70
1880~1920	40	0.30	23.0	1.20	60	20	-30~+70
2110~2170	60	0.30	23.0	1.20	60	20	-30~+70
2300~2400	100	0.30	23.0	1.20	60	20	-30~+70
2400~2500	100	0.30	23.0	1.20	60	20	-30~+70
2500~2700	200	0.30	23.0	1.20	60	20	-30~+70
2700~2900	200	0.30	23.0	1.20	60	20	-30~+70
2900~3100	200	0.30	23.0	1.20	60	20	-30~+70
3000~5000	200	0.35	20.0	1.25	60	20	-30~+70
3250~3450	200	0.35	20.0	1.25	60	20	-30~+70
3300~3500	200	0.35	20.0	1.25	60	20	-30~+70
3500~3650	150	0.35	20.0	1.25	60	20	-30~+70
5100~5900	800	0.45	18.0	1.30	60	20	-30~+70
5700~5900	200	0.40	20.0	1.25	60	20	-30~+70

Outline Drawings


Unit: mm [inch] Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Mechanical

Size^{*1}: 12.7*12.7*7.2mm
0.5*0.5*0.283in
Connector Type: Strip line
Mounting: Φ 2
M2, depth 4mm

[1] Exclude connectors and terminations.

Direction Naming Rules:

- 1 - Clockwise
- 2 - Anticlockwise

How To Order**QDI1313M-V-W-X-Y-Z**

V: Start frequency in MHz
W: Stop frequency in MHz
X: Forward Power in W
Y: Reverse Power in W
Z: Direction type

Examples:

To order a QDI1313M series Isolator, 3300~3500MHz, Forward power 60W, Reverse power 20W, Clockwise, specify QDI1313M-3300-3500-60-20-1.

Customization is available upon request.