

QELC-SF-6 SMA, DC~18GHz

- Features:**
- * Low VSWR
 - * No welding
 - * Reusable
 - * Easy installation

- Applications:**
- * Laboratory Test

Electrical

Frequency: DC~18GHz
 VSWR: 1.5
 Impedance: 50Ω

Mechanical

RF Conductor: SMA Female
 Inner Conductor: Beryllium copper
 Outer Conductor: Brass

Environmental


Temperature: -40~+165°C

How To Order

QELC-SF-6

Customization is available upon request.

Outline Drawings

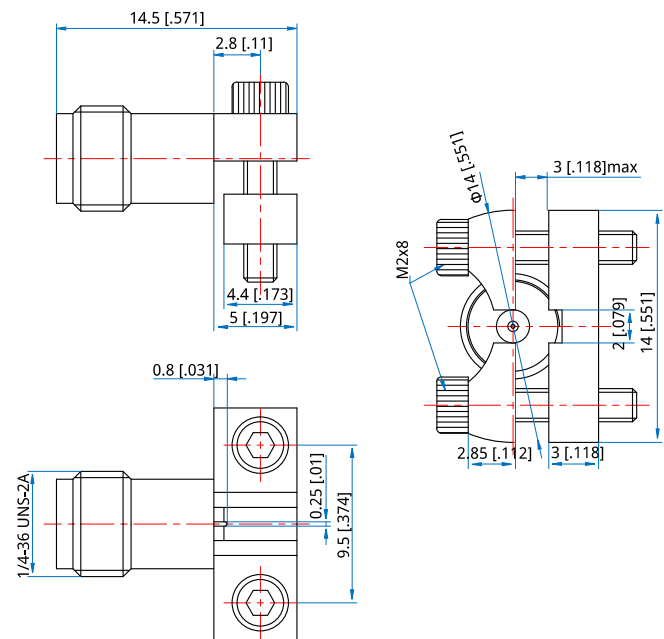

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]