

QFA4005

DC~40GHz, 5W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~40GHz
Attenuation:	1~10dB, 20dB, 30dB, 40dB
Impedance:	50Ω
Average Power*1:	5W@25°C max.
Peak Power:	200W (5μS pulse width, 1.25% duty cycle) @1~30dB 50W (5μS pulse width, 1% duty cycle) @40dB

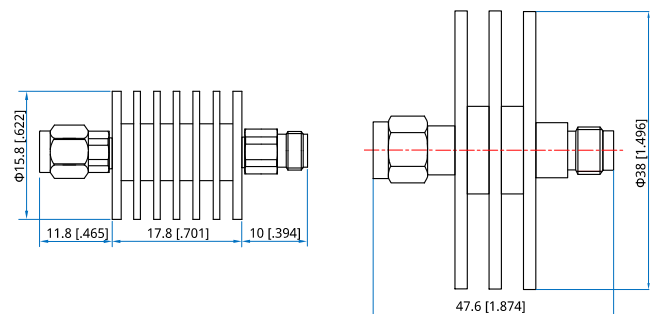
[1] Derated linearly to 0.5W@125°C.

Mechanical

RF Connectors:	2.92mm
Housing:	Aluminum
Dielectric:	PEI
Outer Conductor:	Stainless steel
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings


Outline A

Outline B

Unit: mm [in]

Tolerance: ±2mm [±0.08in]

Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)				VSWR (max.)
	1~10	20	30	40	
DC~40	-0.7/+1.0	-0.7/+1.0	-0.7/+1.0	-1.0/+2.0	1.25, 1.40@40dB

How To Order
QFA4005-X-Y-Z

X: Frequency in GHz

Y: Attenuation in dB (Outline A - 1~30dB, Outline B - 40dB)

Z: Connector type

Connector naming rules:

K - 2.92mm

Examples:

To order an attenuator, DC~40GHz, 2.92mm male to 2.92mm female, 3dB attenuation, specify QFA4005-40-3-K.