

QLA-30-1000-50-13

0.03~1GHz, 50dB, 1.3dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.03~1GHz
Gain:	50dB min.
Gain Flatness:	±2.5dB typ.
Output Power (P1dB):	+15dBm min.
Noise Figure:	1.3dB max.
Spurious:	-60dBc max.
Harmonic:	-15dBc typ.
VSWR:	1.5 typ.
Voltage:	+12V DC
Current:	0.3A typ.
Impedance:	50Ω
Input Power:	+10dBm max.

Mechanical


Size*1:	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

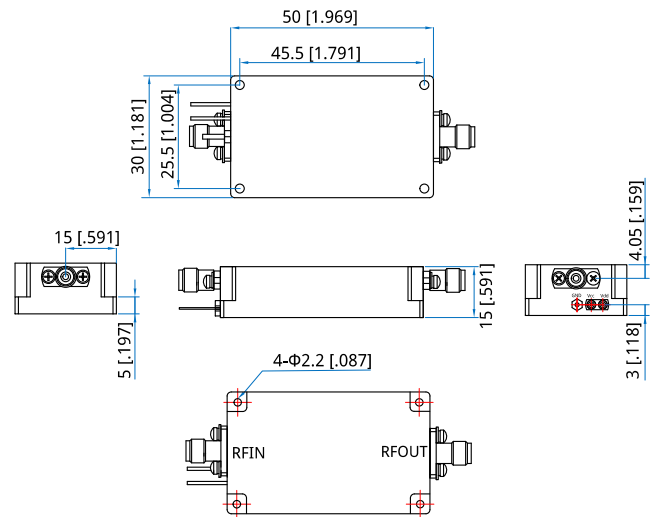

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

QLA-30-1000-50-13

Customization is available upon request.