

QLA-700-1100-25-25

0.7~1.1GHz, 25dB, 2.5dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.7~1.1GHz
Gain:	25dB min.
Gain Flatness:	±1.5dB
Output Power (P1dB):	13dBm
Noise Figure:	2.5dB max.
Spurious:	-60dBc max.
Voltage:	+5V DC

Mechanical


Size*1:	48.5*29mm 1.909*1.142in
RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+60°C
------------------------	-----------

Outline Drawings

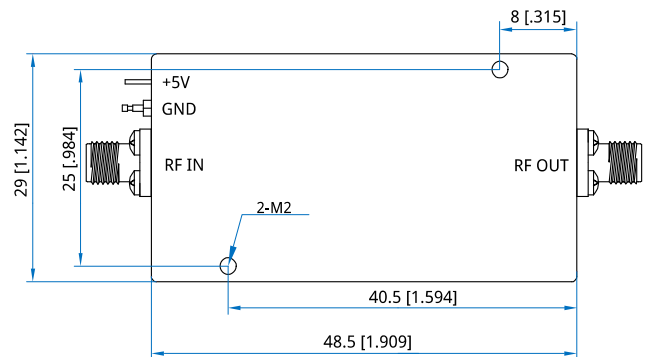

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QLA-700-1100-25-25

Customization is available upon request.