

QLAS-200-6000-42-13

0.2~6GHz, 42dB, 1.3dB

Features:

- * Broad Band
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar

Electrical

| | |
|----------------------|-------------|
| Frequency: | 0.2~6GHz |
| Gain: | 42dB min. |
| Gain Flatness: | ±2.0dB typ. |
| Output Power (P1dB): | +15dBm min. |
| Noise Figure: | 1.3 typ. |
| Spurious: | -60dBc max. |
| Input VSWR: | 1.5 typ. |
| Output VSWR: | 2 typ. |
| Voltage: | +220V AC |
| Impedance: | 50Ω |

Mechanical

Size*1: 136*186*52mm
5.354*7.323*2.047in

RF Connectors: SMA Female

[1] Exclude connectors, rack mount brackets, handles.

How To Order

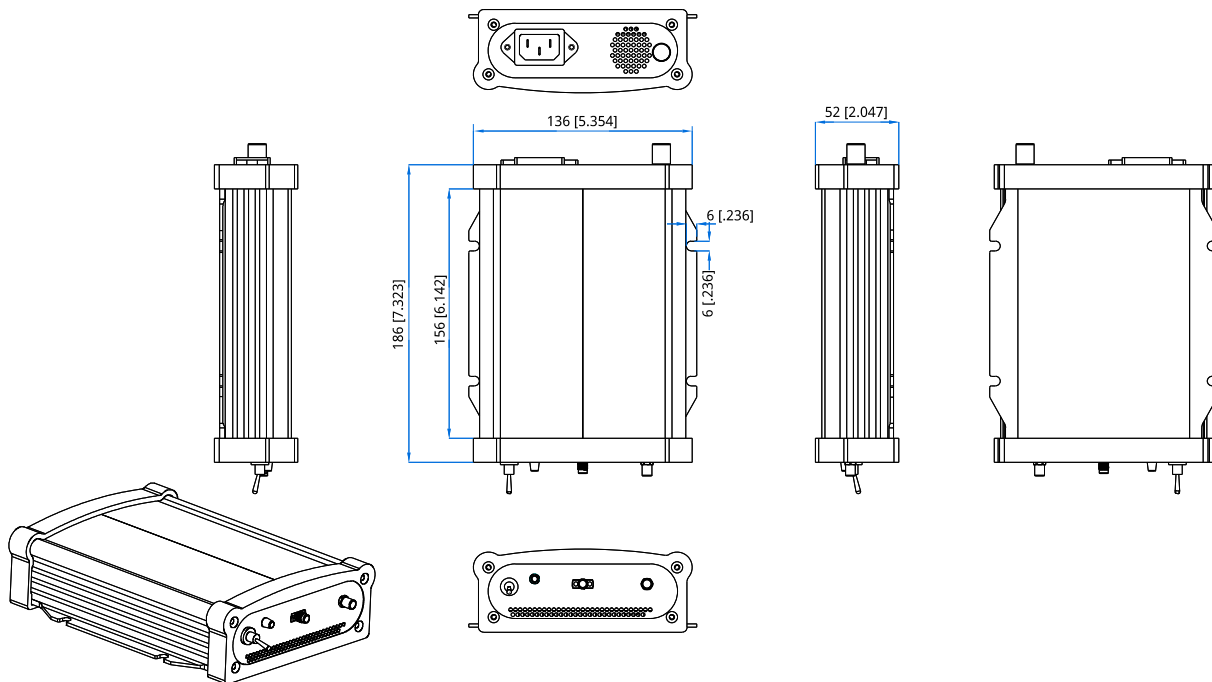
[QLAS-200-6000-42-13](#)

Customization is available upon request.

Environmental

Operating Temperature: -20~+50°C

Non-operating Temperature: -40~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]