

QLAS-3000-15000-15-30

3~15GHz, 15dB, 3dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	3~15GHz
Gain:	15dB min.
Gain Flatness:	±1.0dB typ.
Output Power (P1dB):	+8dBm min.
Noise Figure:	3dB typ.
Spurious:	-60dBc max.
VSWR:	1.5 typ.
Voltage:	+220V AC
Impedance:	50Ω

Size*1: 136*186*52mm
 5.354*7.323*2.047in

RF Connectors: SMA Female

[1] Exclude connectors, rack mount brackets, handles.

How To Order

[QLAS-3000-15000-15-30](#)

Customization is available upon request.


Environmental

Operating Temperature: -20~+50°C

Non-operating Temperature: -40~+85°C

Mechanical

Outline Drawings

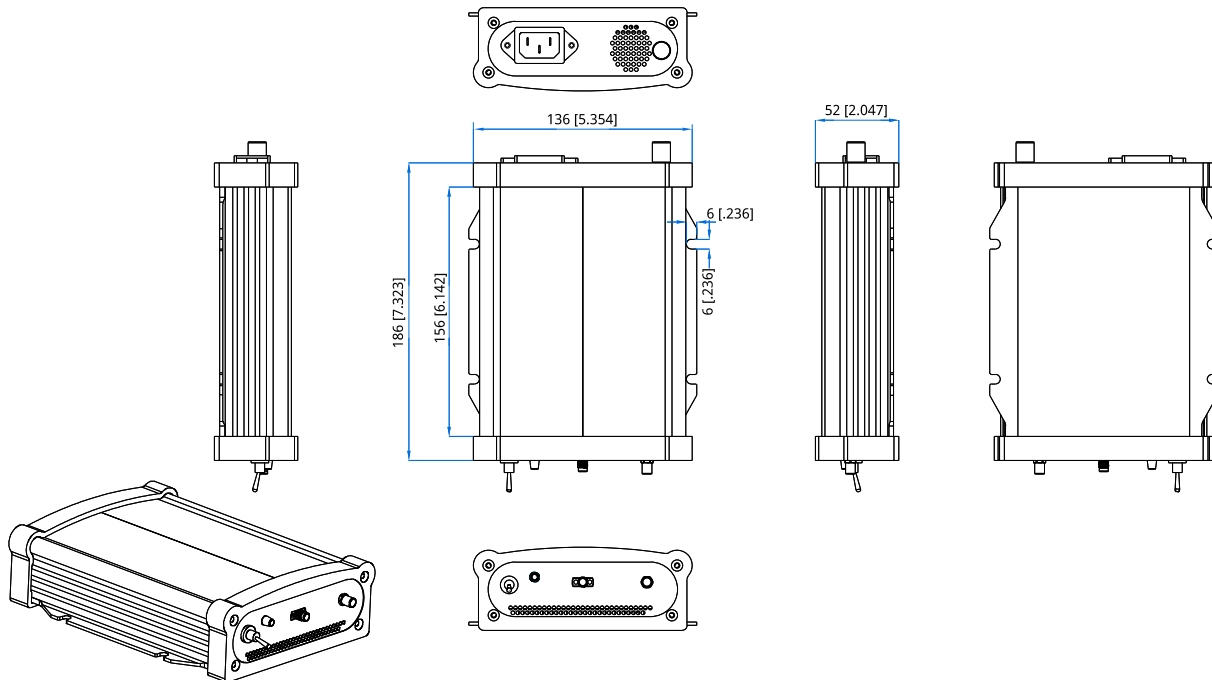

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]