

QLAS-700-1100-25-25

0.7~1.1GHz, 25dB, 2.5dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

| | |
|----------------------|-------------|
| Frequency: | 0.7~1.1GHz |
| Gain: | 25dB min. |
| Gain Flatness: | ±1.5dB |
| Output Power (P1dB): | 13dBm |
| Noise Figure: | 2.5dB max. |
| Spurious: | -60dBc max. |
| Voltage: | +220V AC |

Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | -20~+50°C |
| Non-operating Temperature: | -40~+85°C |

Mechanical

Size^{*1}: 136*186*52mm
 5.354*7.323*2.047in

RF Connectors: SMA Female


[1] Exclude connectors, rack mount brackets, handles.

How To Order

[QLAS-700-1100-25-25](#)

Customization is available upon request.

Outline Drawings

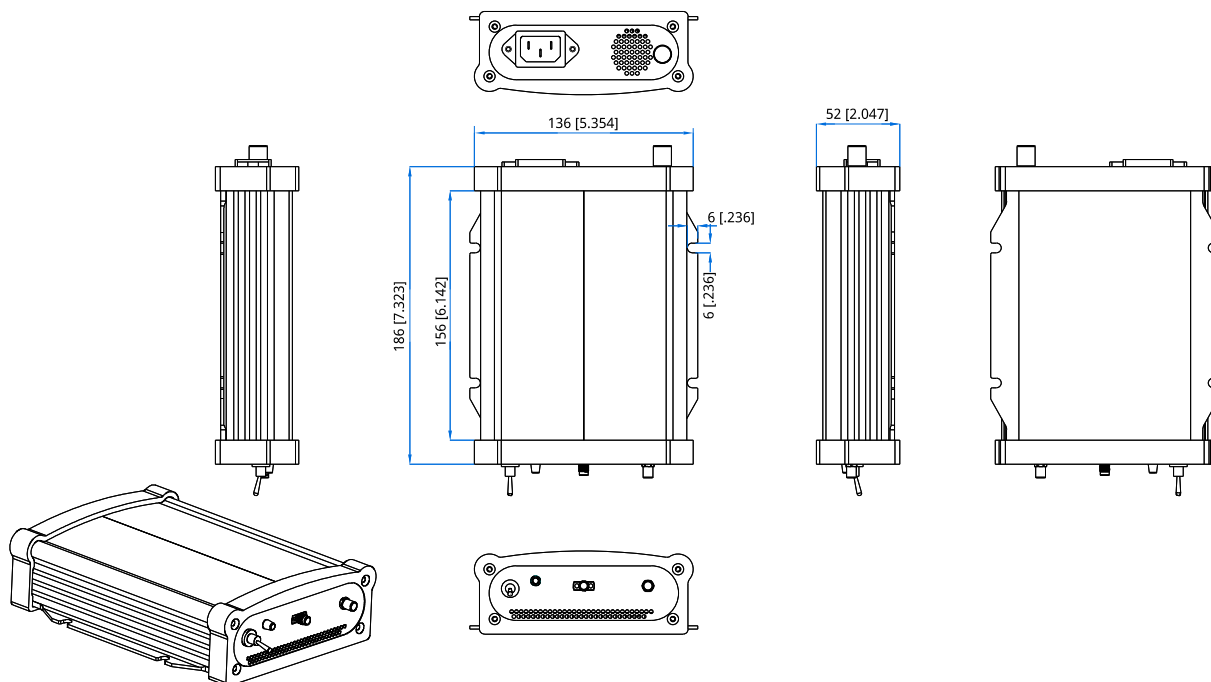

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]