

QPA-20000-32000-25-21

20~32GHz, 25dB, 21dBm

- | | |
|-------------------------|-------------------|
| Features: | Applications: |
| * Small Size | * Wireless |
| * Low Power Consumption | * Transmitter |
| | * Laboratory Test |

Electrical

Frequency:	20~32GHz
Gain:	25dB min.
Gain Flatness:	±1.0dB typ.
Output Power (P1dB):	21dBm min.
Spurious:	-60dBc max.
Harmonic:	-15dBc typ.
Input VSWR:	1.5 typ.
Output VSWR:	1.5 typ.
Voltage:	+8V DC
Current:	500mA typ.

Mechanical


Size*1:	50*30*15mm 1.969*1.181*0.591in
RF Connectors:	2.92mm Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Aluminum
Mounting:	4-Φ2.2mm through-hole
Cooling:	External Heatsink (supplied on request only)

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

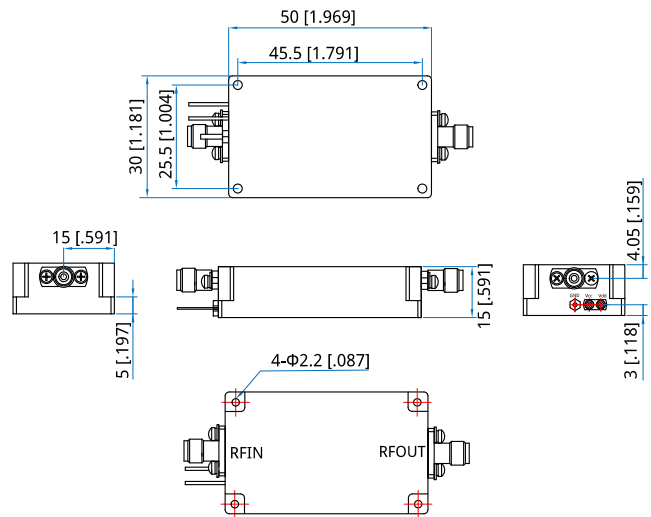

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QPA-20000-32000-25-21

Customization is available upon request.