

QPAS-700-2700-50-50S

0.7~2.7GHz, 50dB, 50dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	700~2700MHz
Gain:	50dB min.
Gain Flatness:	±2dB max.
Output Power (Psat):	50dBm typ.
Harmonic:	-10dBc typ.
Spurious:	-60dBc typ.
VSWR:	2.0 typ.
Voltage:	220V AC
Input Power Without Damage:	0dBm max.

Mechanical

Size:	544.5*426*128mm
	21.437*16.772*5.039in
RF Connectors:	SMA Female, N Female
Control Connectors:	DB9
Cooling:	Forced Air

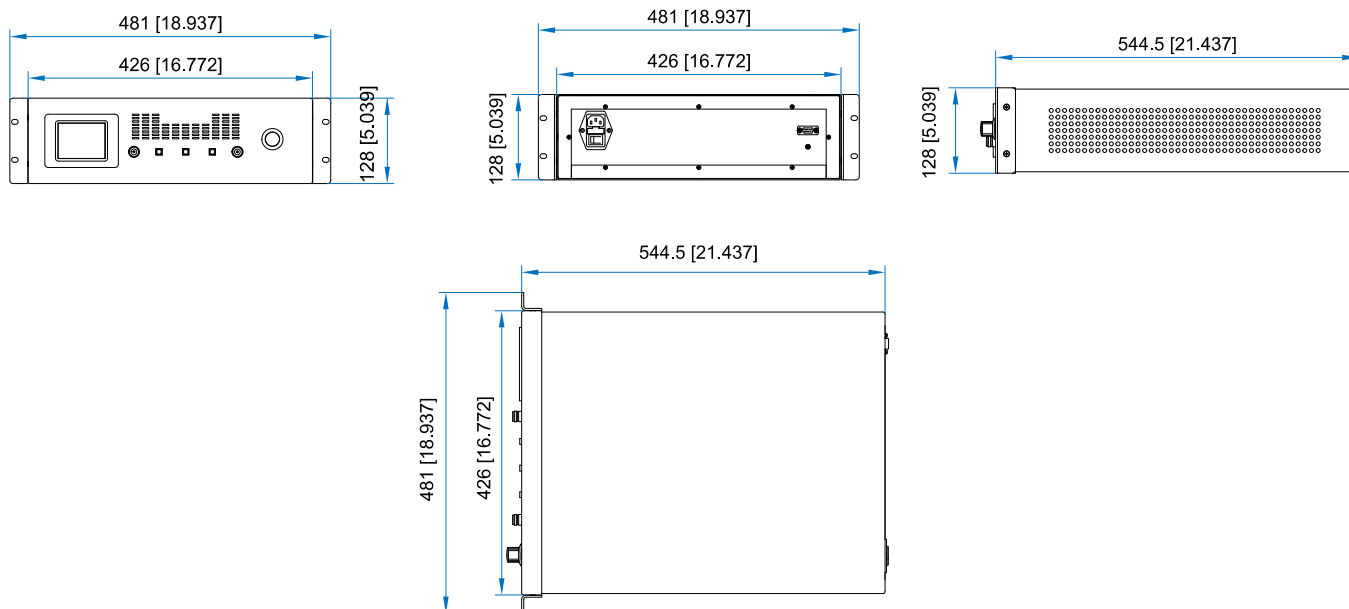
Environmental

Operating Temperature: 0~+50°C

How To Order

QPAS-700-2700-50-50S

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]