

QRHA34

27.1~33GHz, WR-34

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 27.1~33GHz
Gain: 10, 15, 20, 25dB
VSWR: 1.25 max.
1.5 max. (Connectorized)
Impedance: 50Ω

Mechanical

Interface: WR-34
Flange: UBR260
Connectors: 2.92mm Female
Material: Brass or Aluminium

How To Order

QRHA34-X-Y

X: Gain in dB

Y: Connector type

Connector naming rules:


K - 2.92mm Female

Examples:

To order an antenna, 27.1-33GHz, 10dB, WR-34, specify QRHA34-10.

Customization is available upon request.

Outline Drawings

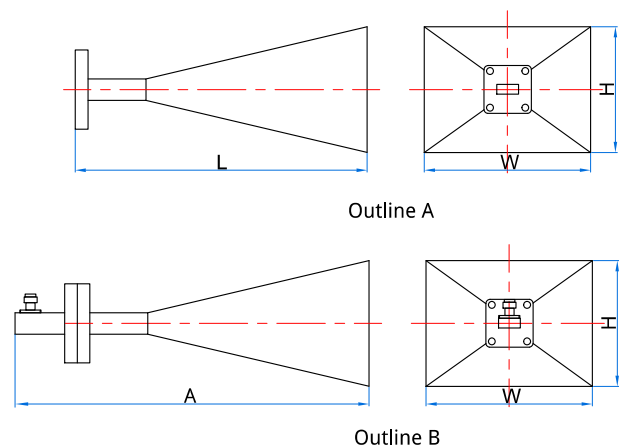

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Gain	L	W	H	A
10dB	25.5 [1.004]	14.3 [563]	11.2 [.441]	55.5 [2.185]
15dB	30.5 [1.201]	28.3 [1.114]	21.9 [.862]	60.5 [2.382]
20dB	77.4 [3.047]	53.3 [2.098]	42.5 [1.673]	107.4 [4.228]
25dB	221.6 [8.724]	94.6 [3.724]	76.4 [3.008]	251.6 [9.906]