

## QSDC-80-1000-K6-60-NS

80~1000MHz, 600W, 60dB

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	80~1000MHz
Insertion Loss:	0.4dB max.
Coupling:	60±1dB
Coupling Flatness:	±0.5dB max.
Directivity:	20dB min.
VSWR:	1.2 max.
Average Power:	600W

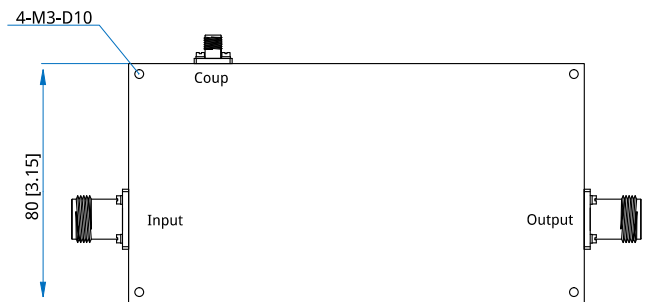
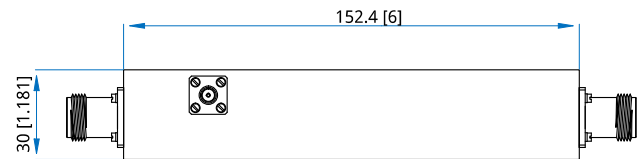
**Mechanical**

Size*1:	152.4*30*80mm 6*1.181*3.15in
Connectors:	N Female, SMA Female
Mounting:	4-M3, depth 10mm

[1] Exclude connectors and terminations.

**Environmental**

Temperature:	-40~+85°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QSDC-80-1000-K6-60-NS**

Customization is available upon request.