

QVLC-K

DC~40GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~40GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical

RF Connector: 2.92mm
Outer Conductor: Passivated SU303 Stainless Steel
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C


How To Order

QVLC-KF-1 - Outline A


QVLC-KF-2 - Outline B

Customization is available upon request.

Outline Drawings

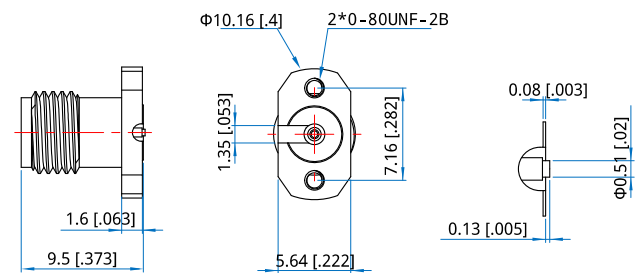

Outline A

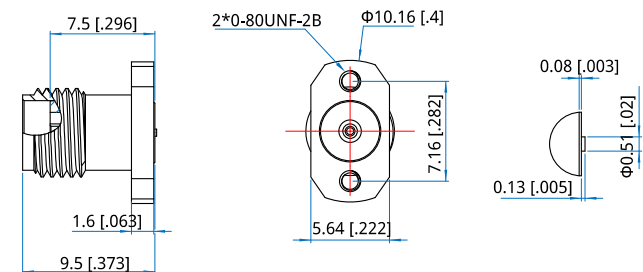

Outline B

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]