

WL 315C

Comparison of various heat exchangers



Description

- use of industrial components
- five different heat exchangers in comparison
- adjustment of operating modes and selection of heat exchangers clearly arranged on the front panel

In practice, different types of heat exchanger are used depending on requirements in order to ensure efficient heat transfer and avoid losses.

The WL 315C trainer is used to study and compare five different heat exchangers. Both parallel flow and counterflow operation are demonstrated, with their different temperature curves.

In the plate, tubular and shell & tube heat exchangers, heat is transferred between hot and cold water in tubes or between plates. In the finned tube heat exchanger, the air flows around pipes with hot water in crossflow.

In the stirred tank with double jacket and coiled tube, either the outer jacket or the inner coiled tube can be filled with hot water.

A stirring machine ensures that the water inside the tank is mixed to achieve an even heat distribution.

The air volume flow for studying the finned tube heat exchanger is adjusted via a throttle valve at the fan outlet. Valves are used to switch between parallel flow and counterflow. The flow rate in the hot water or cold water circuit can also be adjusted by means of valves.

The air volume flow is measured with a fixed differential pressure sensor. The water pressure can be measured at different points using a portable differential pressure sensor. Temperatures and flow rates are also measured. The measured values are read from digital displays and can be transmitted simultaneously via USB directly to a PC where they can be analysed using the software included.

Hot and cold water is supplied either from the laboratory network or by means of the accessories WL 312.10 hot water generator and WL 312.11 water chiller.

Learning objectives/experiments


- familiarisation with heat transfer processes
 - ▶ heat transfer
 - ▶ heat conduction
- determination of the heat transfer coefficient
- creation of temperature curves for the different heat exchangers
 - ▶ parallel flow
 - ▶ counterflow
 - ▶ cross parallel flow
 - ▶ cross counterflow
- comparison of the different heat exchangers between each other
 - ▶ plate heat exchanger
 - ▶ tubular heat exchanger
 - ▶ shell & tube heat exchanger
 - ▶ finned tube heat exchanger
 - ▶ stirred tank with double jacket and coiled tube

WL 315C


Comparison of various heat exchangers



1 bleed valve, 2 tubular heat exchanger, 3 temperature sensor, 4 plate heat exchanger, 5 air duct, 6 finned tube heat exchanger, 7 shell & tube heat exchanger, 8 fan, 9 adjustable fittings, 10 stirred tank with double jacket and coiled tube, 11 pressure sensor (water), 12 switch cabinet

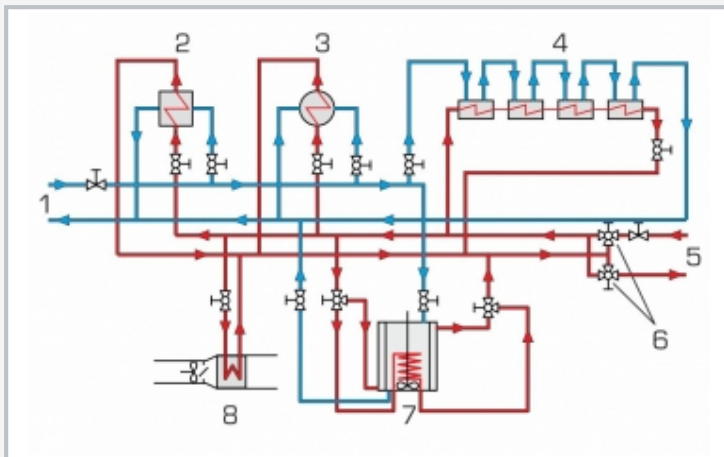

1 cold water connection (laboratory or via WL 312.11), 2 shell & tube heat exchanger, 3 plate heat exchanger, 4 tubular heat exchanger, 5 hot water connection (laboratory or via WL 312.10), 6 valves for setting the operating mode, 7 stirred tank with double jacket and coiled tube, 8 finned tube heat exchanger

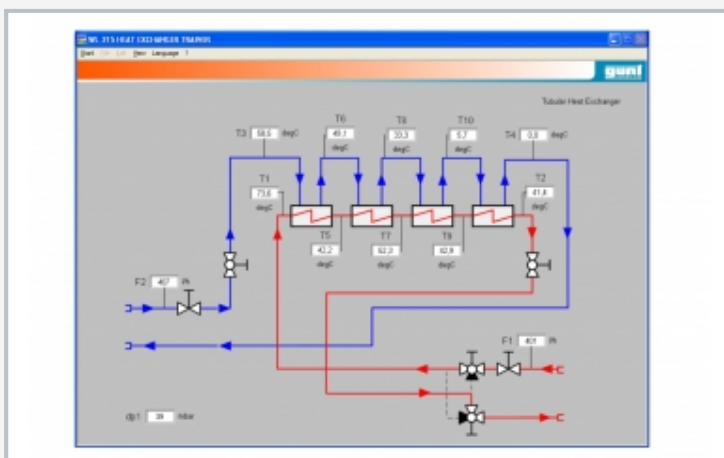

Software screenshot: process schematic of the tubular heat exchanger

Specification

- [1] investigation and comparison of five different heat exchanger types
- [2] parallel flow or counterflow can be set via valves
- [3] flow rates can be adjusted via valves
- [4] electromagnetic flow meter for hot and cold water
- [5] portable differential pressure sensor for water
- [6] fixed differential pressure sensor for air, to determine the volumetric flow rate
- [7] digital displays for temperature, pressure differences and flow rate
- [8] hot water generator and water chiller available (WL 312.10 and WL 312.11)
- [9] GUNT software for data acquisition via USB under Windows 8.1, 10

Technical data

- Plate heat exchanger, (water-water)
 - number of plates: 10
 - heat transfer area: approx. 0,26m²
 - output: 15kW
- Tubular heat exchanger (water-water)
 - heat transfer area: 0,1m²
- Shell & tube heat exchanger (water-water)
 - output: 13kW
- Finned tube heat exchanger (water-air)
 - heat transfer area: approx. 2,8m²
 - fan max. flow rate: 780m³/h
 - fan max. pressure difference: 430Pa
- Stirred tank with double jacket and coiled tube (water-water)
 - double jacket heat transfer area: 0,16m²
 - coiled tube heat transfer area: 0,17m²

Measuring ranges

- differential pressure:
 - ▶ 1x 0...10mbar (air)
 - ▶ 1x 0...1000mbar (water)
- flow rate: 2x 0...3m³/h
- temperature: 10x 0...100°C

230V, 50Hz, 1 phase
 230V, 60Hz, 1 phase; 120V, 60Hz, 1 phase
 UL/CSA optional
 LxWxH: 2010x800x1760mm
 Weight: approx. 250kg

Required for operation

cold and hot water connection: 400L/h, drain
 PC with Windows recommended

Scope of delivery

- 1 trainer
- 1 GUNT software + USB cable
- 1 set of instructional material

WL 315C

Comparison of various heat exchangers

Optional accessories

for Remote Learning

010.10000	GU 100	Web Access Box
with		
060.315C0W	WL 315CW	Web Access Software

Other accessories

060.31210	WL 312.10	Hot water generator
060.31211	WL 312.11	Water chiller