

N to N Adapter, DC-18GHz

AT-AP-NXNX

Feature

N to N Adapter
Specified DC-18GHz
Low Insertion Loss
Excellent Broadband VSWR



Specifications -

Specifications guaranteed from -45 to +85°C, measured in a 50Ω system

Parameter	Frequency Range(GHz)	Min	Typ	Max	Unit
Insertion Loss	DC-18GHz		0.3		dB
VSWR	DC-18GHz		1.15		

Environmental

-55 C to +125 C
Corrosion: MIL-STD 202
Vibration: MIL-STD 202

Materials

Body: SU304 Polished & Passivated
Center Contact: Beryllium Copper Gold Plated
Insulators: PEI


Mechanical

1000 Cycle Min

Order Information

Connector #1	Connector #2	Part Number
N Female	N Female	AT-AP-NFNF
N Female	N Male	AT-AP-NFNM
N Male	N Male	AT-AP-NMNM

Dimension

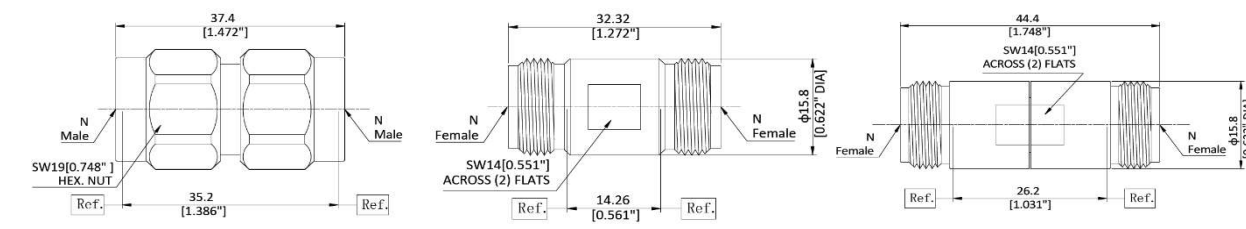

AT Microwave

RM1204,NO.2911,North Zhongshan RD, Putuo District , Shanghai ,China, 200063

Tel:+8621-5291 8556 Email:sales@atmicrowave.com www.atmicrowave.com