

AT-BPF-2432SW: 24-32GHz Band-Pass Filter, 2.92mm

Product Overview



AT Microwave offers high performance band coaxial band-pass filter from 300MHz-40GHz with bandwidth from 1.5% to 70%. Other frequency bands and rejection requirement can provide according to request.

Based on our excellent design work, precise machine tolerance and outstanding quality plating, we can provide band pass filter with low insertion loss, good return loss and high rejection at the same time.

More information, please visit www.atmicrowave.com

Advantages

- ✓ Low Insertion Loss
- ✓ Good Return Loss
- ✓ High Stop Band Suppression
- ✓ Sharp Roll-Off

Application

- ✓ 5G Communication
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Radar System

Key Features

Parameter	Min	Typical	Max
Passband Frequency		24-32GHz	
Center Frequency		28GHz	
Insertion Loss		-1 dB	-3dB
Passband Return Loss	-10	-15 dB	
Low Rejection Frequency		18GHz: -45dBc	
High Rejection Frequency		38GHz: -45dBc	
RF Input/output Port		2.92mm Female	
Spec Temp		25C	




Mechanical Information

Parameter	Value
RF1 Port	2.92mm Female
RF2 Port	2.92mm Female
Case Material	Brass
Plated	Silver
Weight	25g
Dimension	See outline

Absolute Maximum Ratings Table

Parameter	Value
RF Power	+30dBm
Operating Temperature	-40 to +85C
Storage Temperature	-65 to +150C

Test Data:

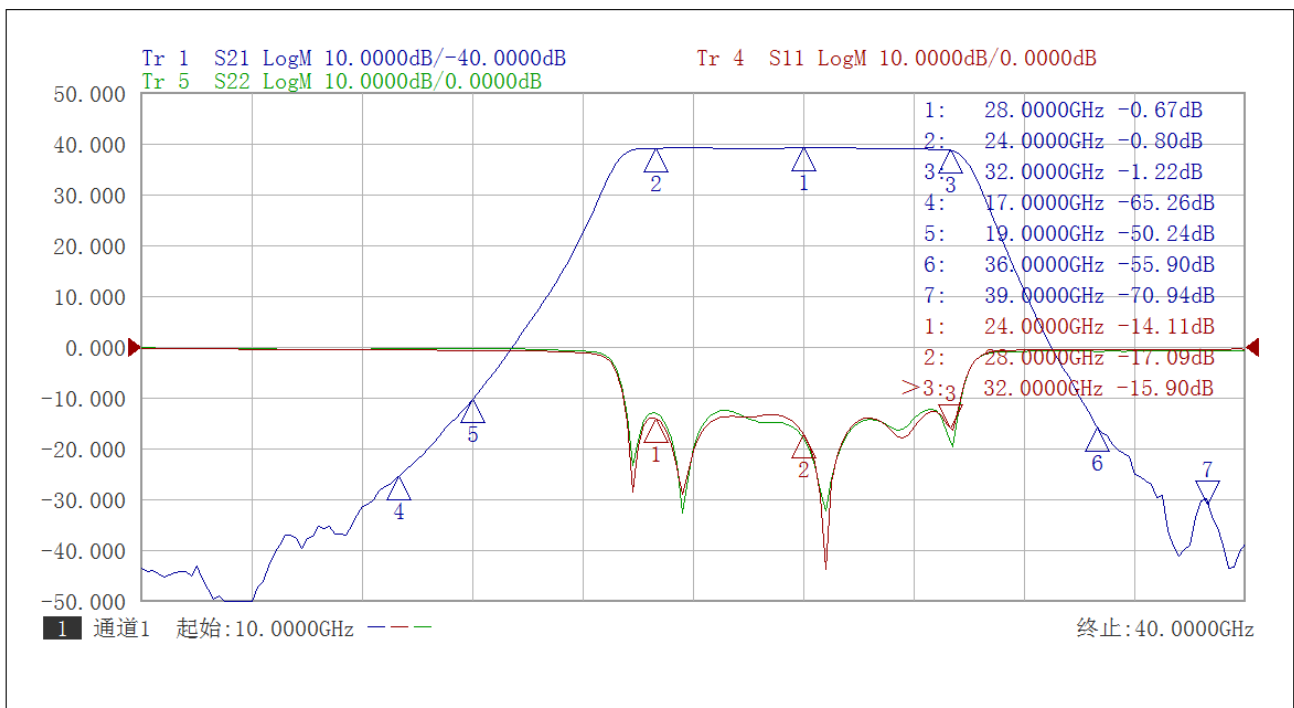

S21, S11, S22 vs Frequency



Dimension: (mm)

