

# Broadband Frequency Divider by 2

## 0.1-26.5GHz, SMA Female

2022-10-10



### Description:

AT-FD2-26S1 is low noise divide-by-2 frequency divider with SMA female input connector. This device operates from 100MHz to 26.5GHz with a single 5V supply.

This divider offers SSB phase noise of -152dBc/Hz at 100kHz, which helps the user maintain excellent system noise performance. Differential input and differential output is available according to request.

More information, visit [www.atmicrowave.com](http://www.atmicrowave.com)

### Feature

- ✓ Wideband coverage
- ✓ Low SSB phase noise
- ✓ Low current
- ✓ Small Size

### Application

- ✓ 5G Systems
- ✓ Raday System
- ✓ Test Equipment
- ✓ ROF (RF Over Fiber)
- ✓ Communication System

### Electronical Specifications:

Parameter	Min	Typical	Max
Input Frequency Range		0.1-26.5GHz	
Input Power	-10dBm	0dBm	+8dBm
Divider Rate		/2	
Output Frequency		0.05-13.25GHz	
Output Power	-6dBm	-3dBm	
Vdd		+5V	+8V
Current		35mA	
Spec Temp		25C	





# AT-FD2-26S1

0.1-26.5GHz Frequency Divider by2

## Mechanical Information

Item	Description
Input Port	SMA Female
Output Port	SMA Female
Case Material	Copper
Finish	Gold Plated
Weight	50g
Size:	See outline

## Absolute Maximum Ratings Table

Parameter	Value
Power Supply	+13V
RF Power Handling	+15dBm
Operating Temperature	-20 to 70C
Storage Temperature	-65 to +150C

### Caution:

Please pay attention to the case temperature. If case temperature exceed higher than +50C, heat sink and fan are required, or the amplifier may be damaged.

### Notes:

1. Datasheet may be changed according to update of MMIC, Raw materials , process, and so on.
2. This data is only for reference, not for guaranteed specifications.
3. Please contact AT Microwave team to make sure you have the most current data.







# AT-FD2-26S1

0.1-26.5GHz Frequency Divider by2

## Test Data:

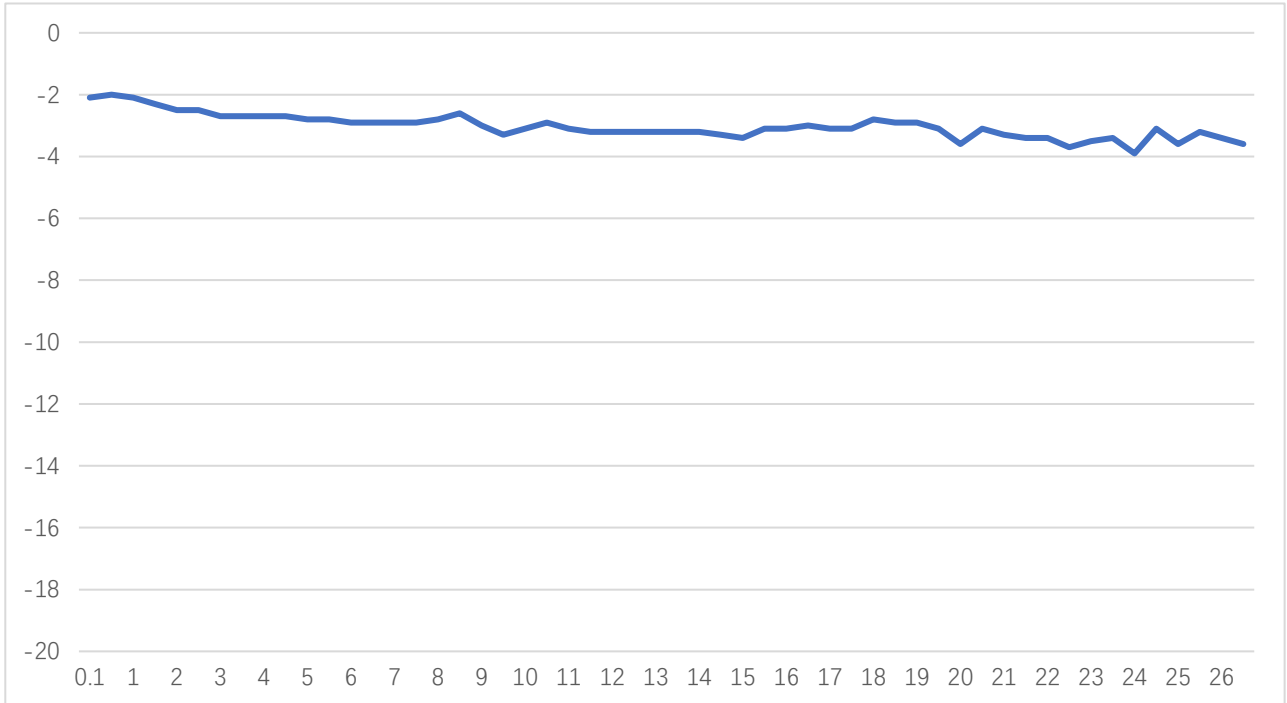


/2 Output Power vs Input Frequency

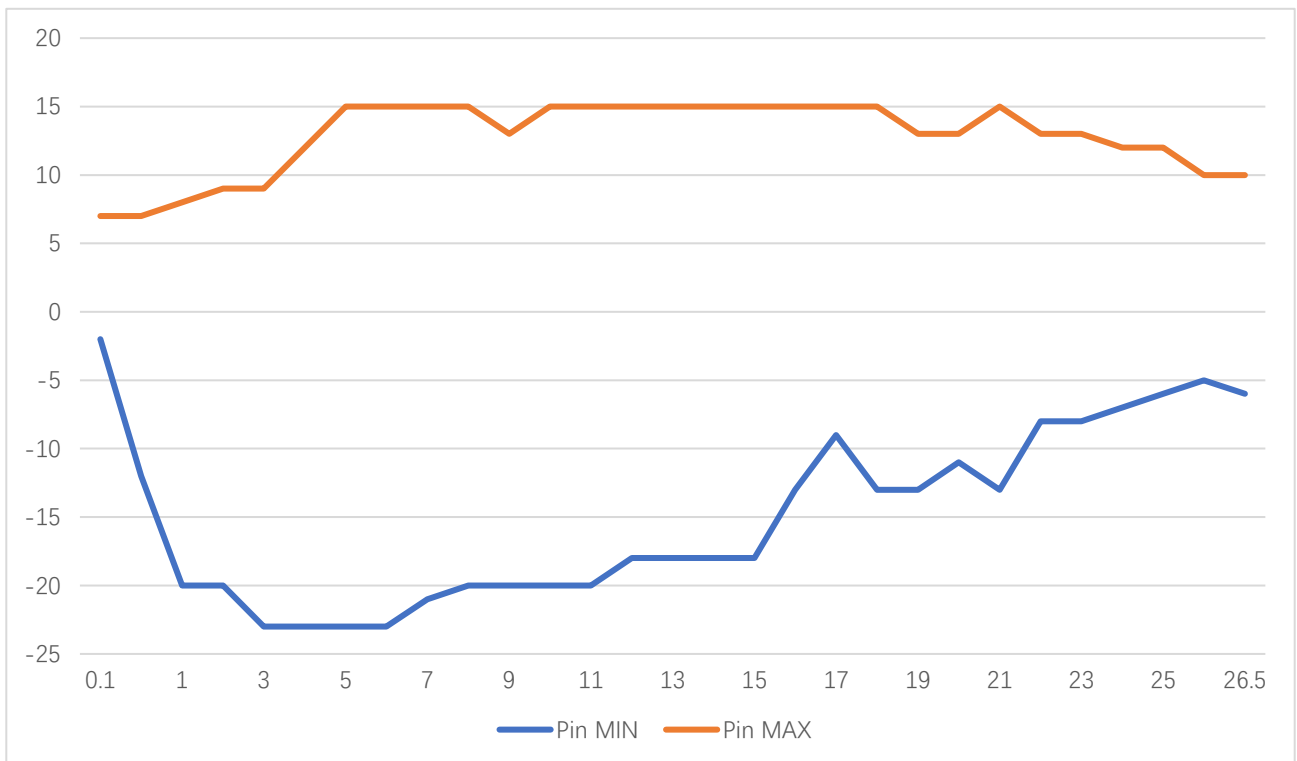

Input Power Window vs Input Frequency



### Dimension: (mm)

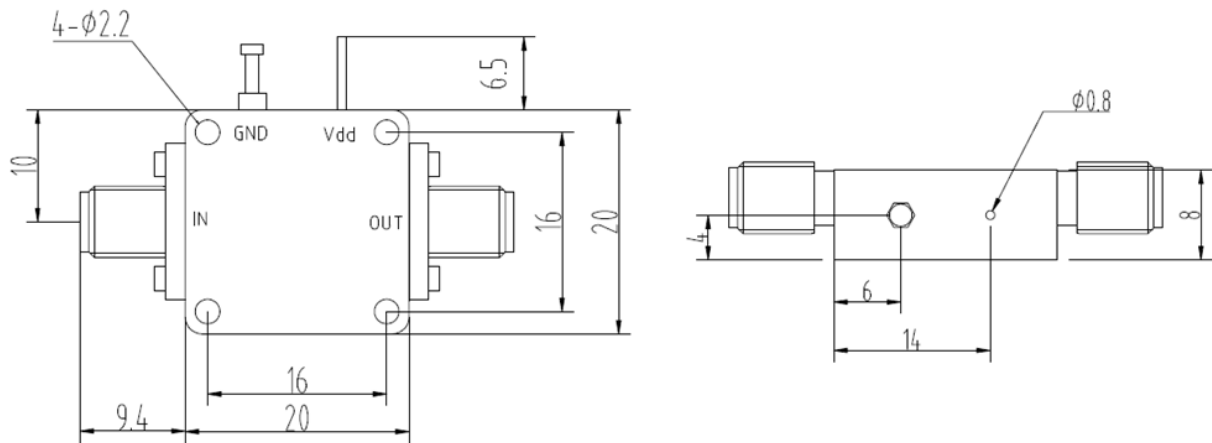

	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

